


80 Amp Schottky Rectifier SBR8060

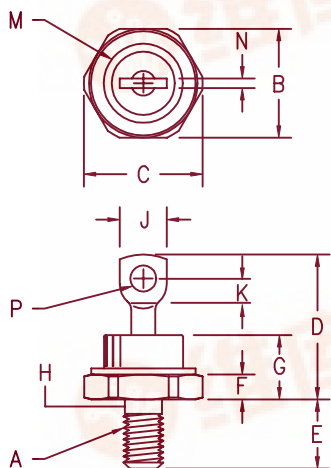

Notes:

1. Full threads within 2 1/2 threads
2. Standard Polarity: Stud is Cathode
Reverse Polarity: Stud is Anode

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	---	---	---	---	1/4-28
B	.669	.688	17.00	17.47	
C	---	.794	---	20.16	
D	.750	1.00	19.05	25.40	
E	.422	.453	10.72	11.50	
F	.115	.200	2.93	5.08	
G	---	.450	---	11.43	
H	.220	.249	5.59	6.32	1
J	---	.375	---	9.52	
K	.156	---	3.97	---	
M	---	.510	---	12.95	Dia
N	---	.080	---	2.03	
P	.140	.175	3.56	4.44	Dia

DO-203AB (DO-5)

Microsemi Catalog Number Working Peak Reverse Voltage Repetitive Peak Reverse Voltage

SBR8060* 60V 60V

*Add the Suffix R for Reverse Polarity

- Schottky barrier rectifier
- Guard ring protection
- V_{RRM} 60 Volts
- Reverse Energy Tested
- 175°C junction temperature
- 80 Amperes


Electrical Characteristics

Average forward current	$I_F(AV)$ 80 Amps	$T_C = 131^\circ C$, square wave, $R_{\theta JC} = 0.8^\circ C/W$
Maximum surge current	I_{FSM} 1200 Amps	8.3ms, half sine, $T_J = 175^\circ C$
Max repetitive peak reverse current	$I_R(OV)$ 2 Amp	$f = 1$ KHz, $25^\circ C$, 1 μsec square wave
Max peak forward voltage	V_{FM} .77 Volts	$I_{FM} = 80A$: $25^\circ C^*$
Max peak reverse current	I_{RM} 30 mA	$V_{RRM}, T_J = 125^\circ C$
Max peak reverse current	I_{RM} 2.0 mA	$V_{RRM}, T_J = 25^\circ C$
Typical junction capacitance	C_J 2000 pF	$V_R = 5.0V, T_J = 25^\circ C, f = 1MHz$

*Pulse test: Pulse width 300 μsec , Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T_{STG}	$-55^\circ C$ to $175^\circ C$
Operating junction temp range	T_J	$-55^\circ C$ to $175^\circ C$
Maximum thermal resistance	$R_{\theta JC}$	$0.8^\circ C/W$ junction to case
Typical thermal resistance (greased)	$R_{\theta CS}$	$0.5^\circ C/W$ case to sink
Mounting torque		25-30 inch pounds
Weight		.54 ounces (15.3 grams) typical



COLORADO

800 Hoyt Street
Broomfield, CO. 80020
PH: (303) 469-2161
FAX: (303) 466-3775

5-1-00 Rev. 1

SBR8060

Figure 1
Typical Forward Characteristics

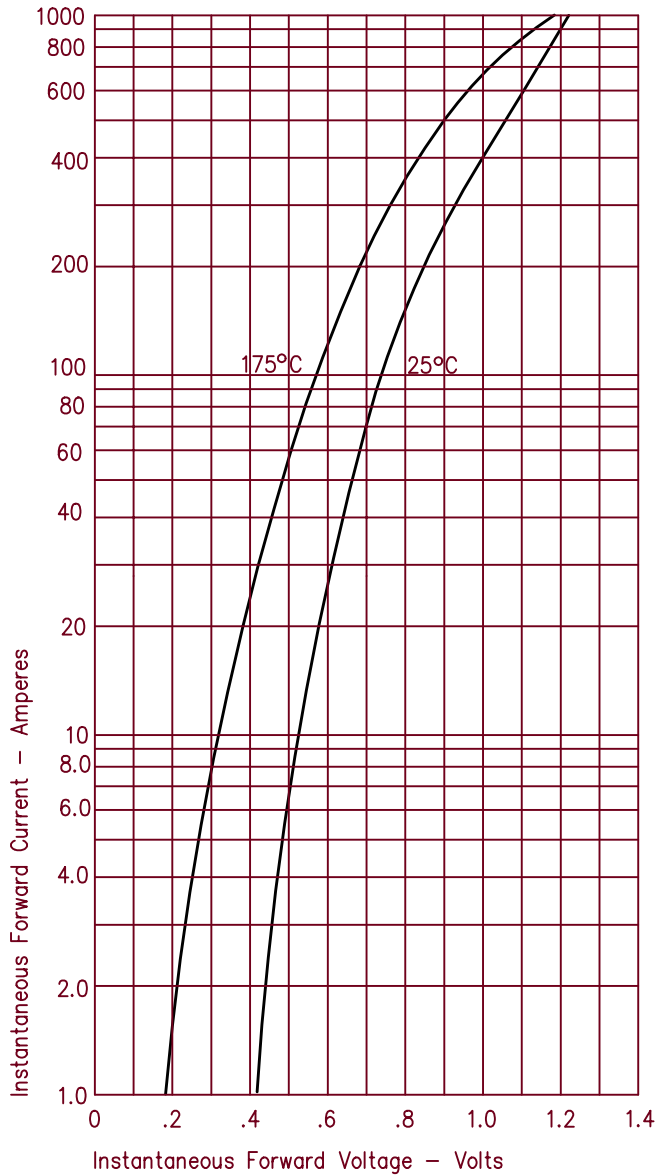


Figure 2
Typical Reverse Characteristics

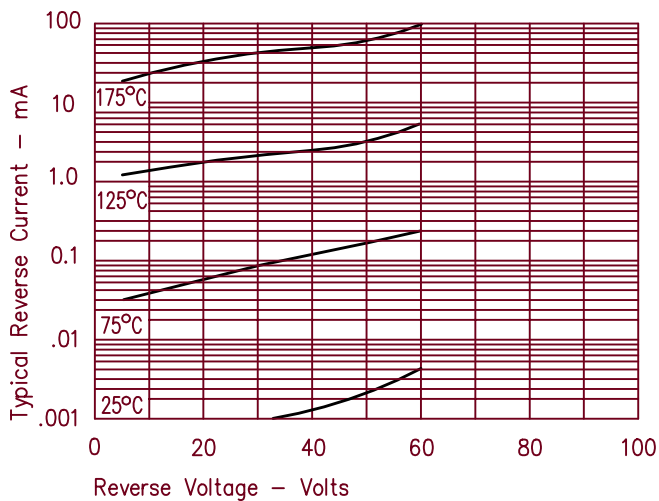


Figure 3
Typical Junction Capacitance

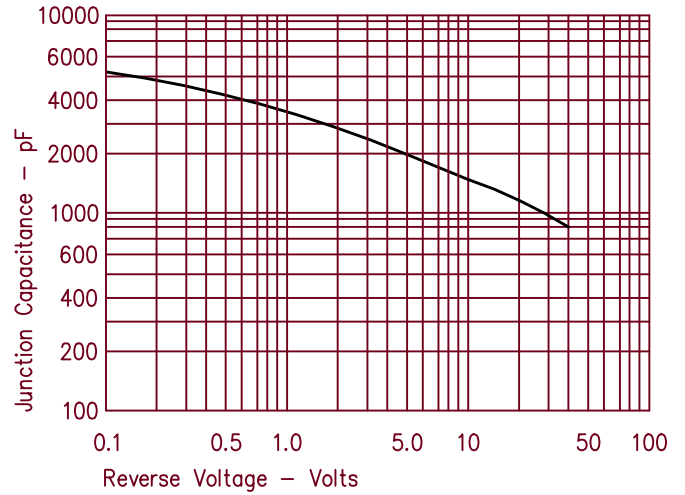


Figure 4
Forward Current Derating

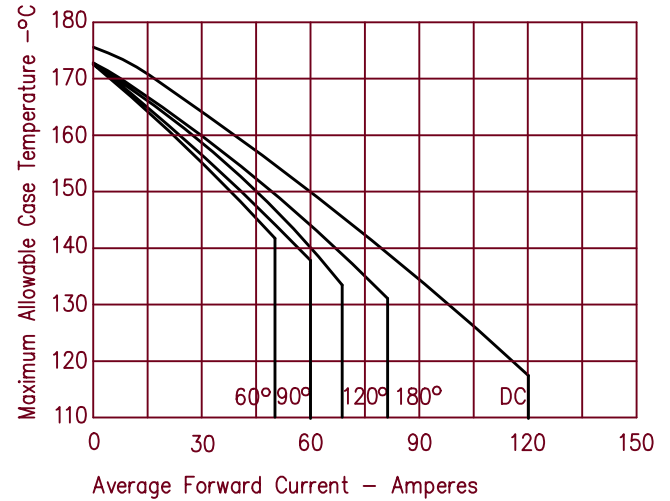


Figure 5
Maximum Forward Power Dissipation

