


## SBT3040 — SBT3050

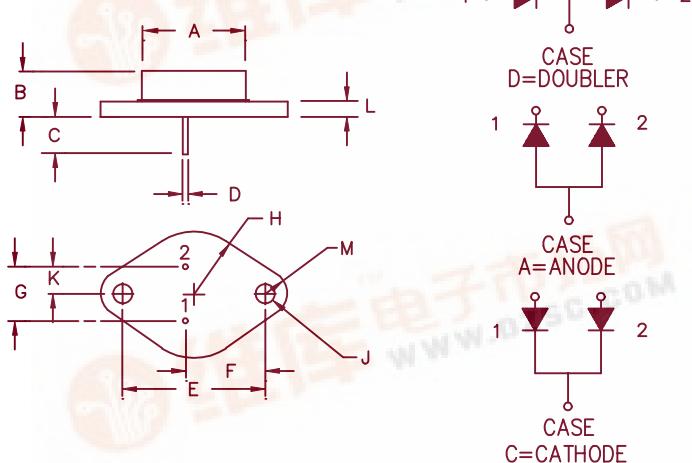

	Dim. Inches		Millimeter		
	Minimum	Maximum	Minimum	Maximum	Notes
A	—	.875	—	22.23	Dia.
B	.250	.450	6.35	11.43	
C	.435	—	11.05	—	
D	.038	.043	.97	1.09	Dia.
E	1.177	1.197	29.90	30.40	
F	.655	.675	16.64	17.15	
G	.420	.440	10.67	11.18	
H	—	.525	—	13.34	Rad.
J	.151	.161	3.84	4.09	Dia.
K	.205	.225	5.21	5.72	
L	—	.135	—	3.43	
M	—	.188	—	4.78	Rad.

TO-204AA (TO-3)

Microsemi Catalog Number	Working Reverse Voltage	Peak Reverse Voltage	Repetitive Peak Reverse Voltage
SBT3040*	40V	40V	40V
SBT3045*	45V	45V	45V
SBT3050*	50V	50V	50V

\*ADD D, C, or A

- Schottky Barrier Rectifier
- Guard Ring Protection
- Low Forward Voltage
- $V_{RRM}$  – 40 to 50V
- 30 Amperes
- Reverse Energy Tested

## Electrical Characteristics Per Leg

Average forward current (standard)	I <sub>F(AV)</sub>	30 Amps
Average forward current (reverse)	I <sub>F(AV)</sub>	30 Amps
Maximum surge current	I <sub>FSM</sub>	600 Amps
Max repetitive peak reverse current	I <sub>R(0V)</sub>	2 Amps
Max peak forward voltage	V <sub>FM</sub>	.57 Volts
Max peak forward voltage	V <sub>FM</sub>	.70 Volts
Max peak reverse current	I <sub>RM</sub>	25 mA
Max peak reverse current	I <sub>RM</sub>	1.5 mA
Typical junction capacitance per leg	C <sub>J</sub>	1800 pF

T <sub>C</sub> = 148°C, Square wave, R <sub>θJC</sub> = 1.4°C/W
T <sub>C</sub> = 132°C, Square wave, R <sub>θJC</sub> = 2.2°C/W
8.3 ms, half sine T <sub>J</sub> = 175°C
f = 1 KHz, 25°C, 1 μsec Square wave
I <sub>FM</sub> = 30A: T <sub>J</sub> = 175°C*
I <sub>FM</sub> = 30A: T <sub>J</sub> = 25°C*
V <sub>RRM</sub> , T <sub>J</sub> = 125°C*
V <sub>RRM</sub> , T <sub>J</sub> = 25°C
V <sub>R</sub> = 5.0V, T <sub>J</sub> = 25°C

\*Pulse test: Pulse width 300 μsec, Duty cycle 2%

## Thermal and Mechanical Characteristics

Storage temp range	T <sub>STG</sub>	-65°C to 175°C
Operating junction temp range	T <sub>J</sub>	-65°C to 175°C
Maximum thermal resistance (standard polarity)	R <sub>θJC</sub>	1.4°C/W Junction to case
Maximum thermal resistance (reverse polarity)	R <sub>θJC</sub>	2.2°C/W Junction to case
Typical thermal resistance	R <sub>θCS</sub>	0.5°C/W Case to sink
Weight		1.0 ounces (28 grams) typical

# SBT3040 - SBT3050

Figure 1  
Typical Forward Characteristics

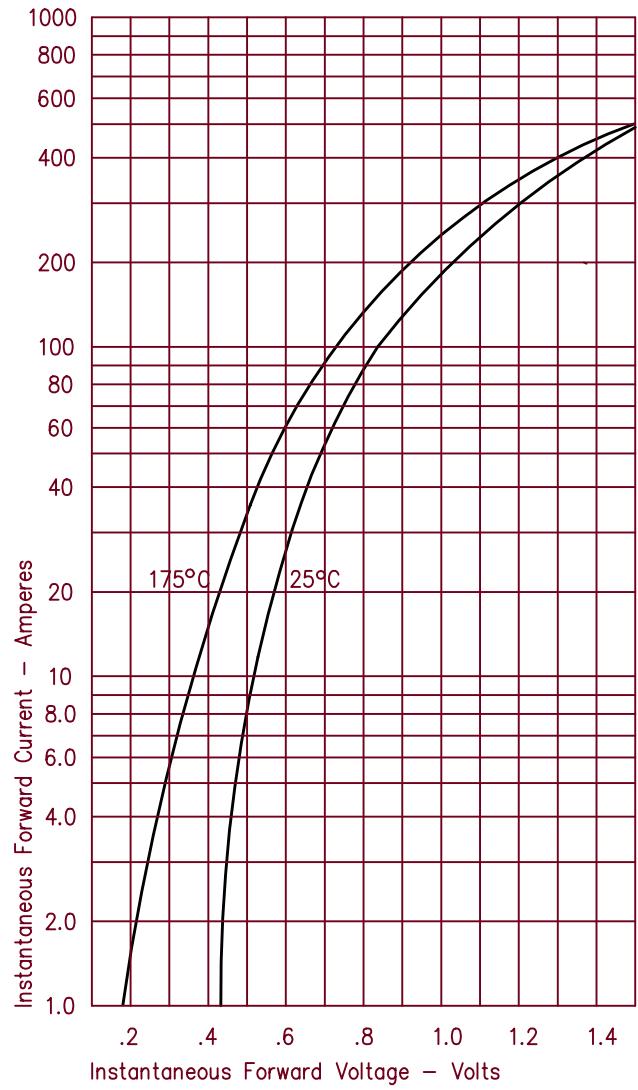


Figure 2  
Typical Reverse Characteristics

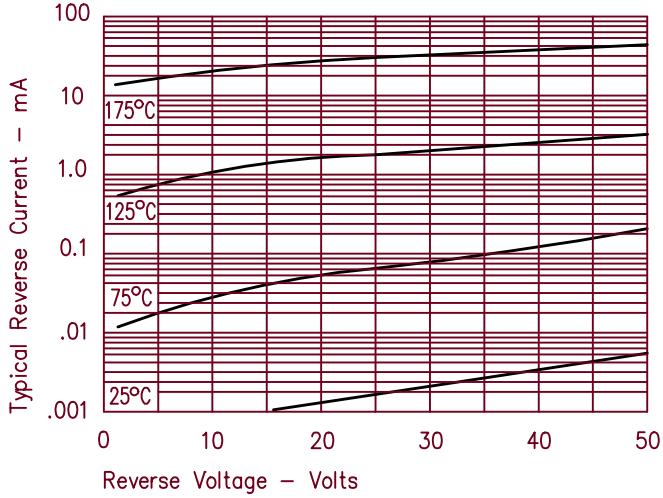


Figure 3  
Typical Junction Capacitance

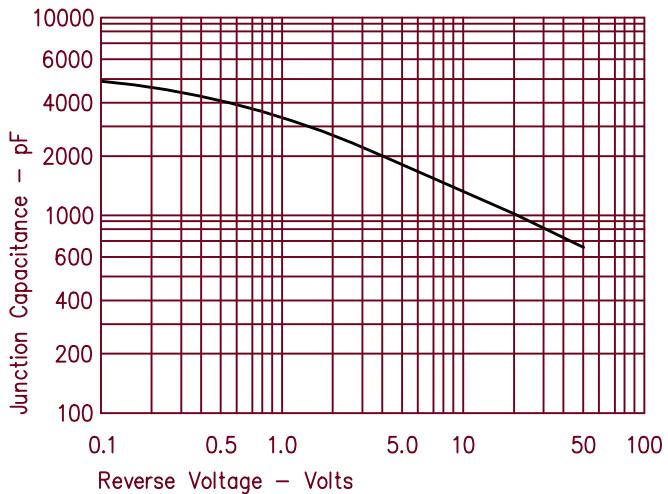


Figure 4  
Forward Current Derating - Standard Polarity


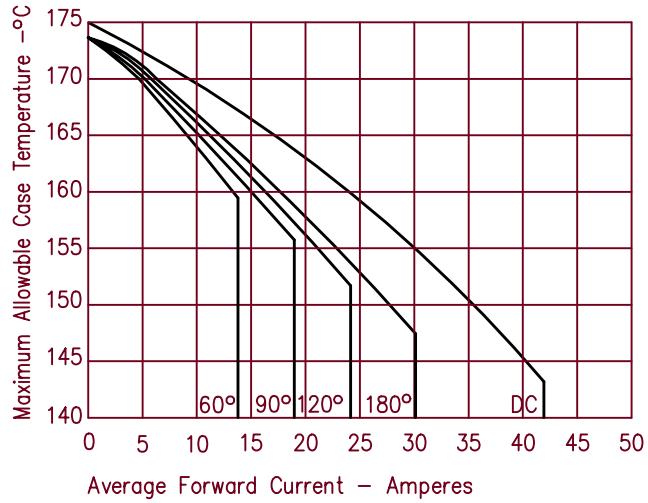


Figure 5  
Forward Current Derating - Reverse Polarity

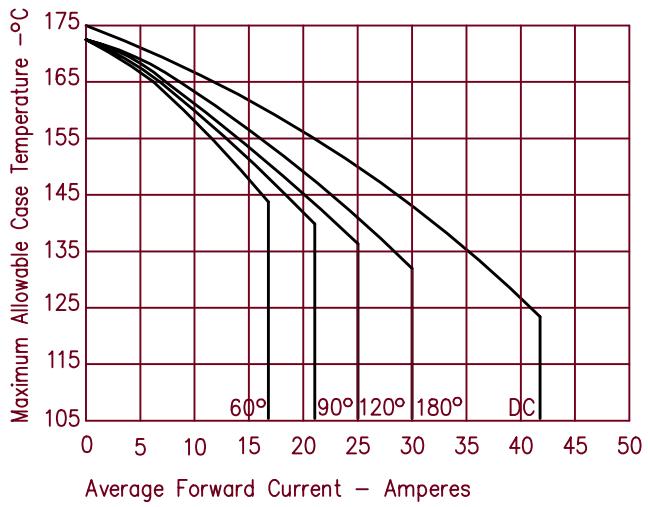

# SBT3040 – SBT3050

Figure 6  
Maximum Forward Power Dissipation – Standard Polarity

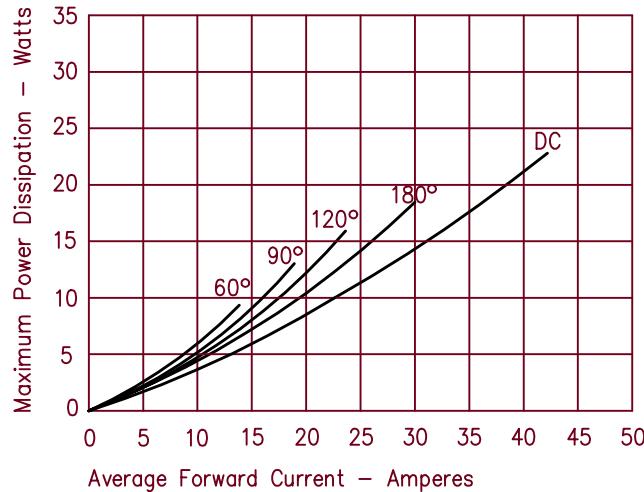


Figure 7  
Maximum Forward Power Dissipation – Reverse Polarity

