

Surface Mount

# Power Splitter/Combiners

**NEW!**  
SBTC-2-10 SBTC-2-10L

2 Way-0° 50Ω

5 to 1000 MHz


## Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	0.5W max.
Internal Dissipation	0.125W max.

## Pin Connections

SUM PORT	6
PORT 1	3
PORT 2	4
GROUND	1,2
NOT USED	5

## Outline Drawing

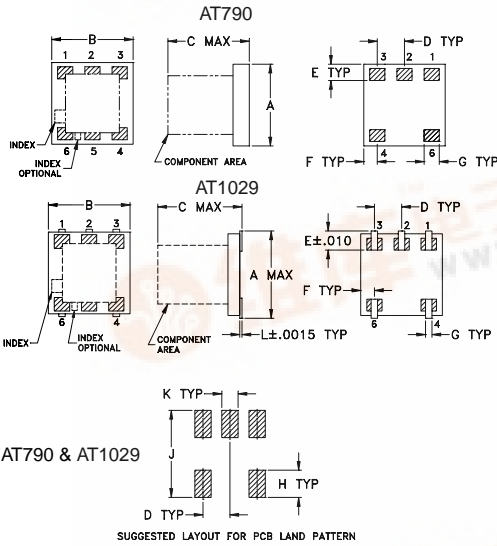

## Outline Dimensions (inch/mm)

AT790	A	B	C	D	E	F	G	H	J	K	wt. grams
	.150	.150	.150	.050	.030	.025	.028	.050	.160	.030	
	3.81	3.81	3.81	1.27	0.76	0.64	0.71	1.27	4.06	0.76	.10


  

AT1029	A	B	C	D	E	F	G	H	J	K	L	wt. grams
	.166	.150	.155	.050	.037	.025	.012	.060	.184	.030	.004	
	4.22	3.81	3.94	1.27	0.94	0.64	0.30	1.52	4.67	0.76	0.10	.10

## Reflow Solder Assembly

Silver-bearing solder (Sn/Pb/Ag 62/36/2%) is recommended; however, tin-lead eutectic (Sn/Pb 63/37%) may be used. For temperature profiles, see Application Note AN-40-004

## Demo Board MCL P/N: TB-274 Suggested PCB Layout (PL-152)

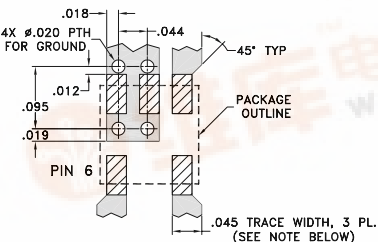

NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350 WITH DIELECTRIC THICKNESS 0.020" ± 0.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.  
DENOTES PCB COPPER LAYOUT  
DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Features

- low insertion loss, 0.3 dB typ.
- excellent amplitude unbalance, 0.1 dB typ.
- very good phase unbalance, 1.0 deg. typ.
- temperature stable, BLUE CELL™ base
- solder plated leads for excellent solderability
- small size
- low cost
- patent pending

## Applications

- cellular
- UHF/VHF receivers/transmitters



No Leads

CASE STYLE: AT790  
PRICE: \$2.49 ea. QTY (25)  
\$1.69 ea. QTY (1000)



Leads

CASE STYLE: AT1029  
PRICE: \$2.64 ea. QTY (25)  
\$1.84 ea. QTY (1000)



## Splitter Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)			INSERTION LOSS (dB) ABOVE 3.0 dB			PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)								
	L	M	U	L	M	U	L	M	U	L	M	U						
$f_c - f_u$	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Max.	Typ. Max.	Typ. Max.	Max.	Max.	Max.	Max.	Max.	Max.						
5-1000	29	20	25	18	21	16	0.3	0.7	0.3	0.8	0.5	1.4	3	3	5	0.6	0.5	0.5

L = low range [ $f_c$  to  $10 f_c$ ] M = mid range [ $10 f_c$  to  $f_u/2$ ] U = upper range [ $f_u/2$  to  $f_u$ ]

## Typical Performance Data

Frequency (MHz)	Insertion Loss (dB) S-1	Insertion Loss (dB) S-2	Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
5.00	3.25	3.12	0.13	30.21	0.41	1.03	1.17	1.14
7.00	3.24	3.11	0.13	31.41	0.32	1.02	1.16	1.12
10.00	3.26	3.13	0.13	32.34	0.13	1.02	1.15	1.12
50.00	3.26	3.15	0.12	31.93	0.06	1.02	1.14	1.11
70.00	3.28	3.16	0.12	31.37	0.07	1.03	1.14	1.11
100.00	3.29	3.18	0.11	30.43	0.12	1.03	1.13	1.10
200.00	3.34	3.24	0.10	28.05	0.20	1.05	1.12	1.10
300.00	3.38	3.30	0.08	26.00	0.24	1.06	1.11	1.09
400.00	3.39	3.34	0.05	24.32	0.26	1.07	1.09	1.08
500.00	3.45	3.44	0.02	23.24	0.28	1.08	1.07	1.07
600.00	3.48	3.50	0.02	21.78	0.28	1.10	1.05	1.06
700.00	3.45	3.52	0.07	21.08	0.21	1.10	1.02	1.05
800.00	3.47	3.59	0.12	20.74	0.09	1.09	1.03	1.06
900.00	3.49	3.67	0.18	20.62	0.06	1.08	1.06	1.08
1000.00	3.52	3.76	0.24	20.71	0.27	1.06	1.10	1.11

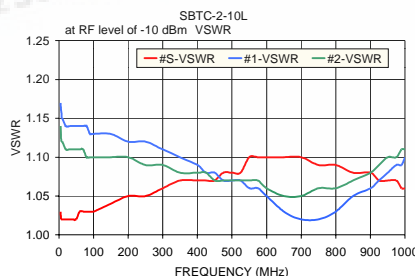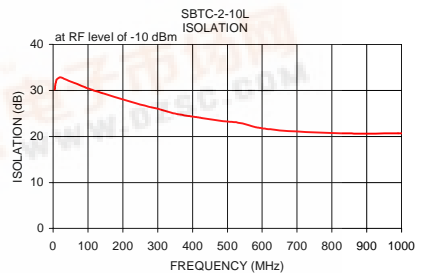

REV. D  
M89618  
SBTC-2-10 ED-9227  
SBTC-2-10L ED-9915D/2  
WZTD/CP  
040212