


SD241, SD24145

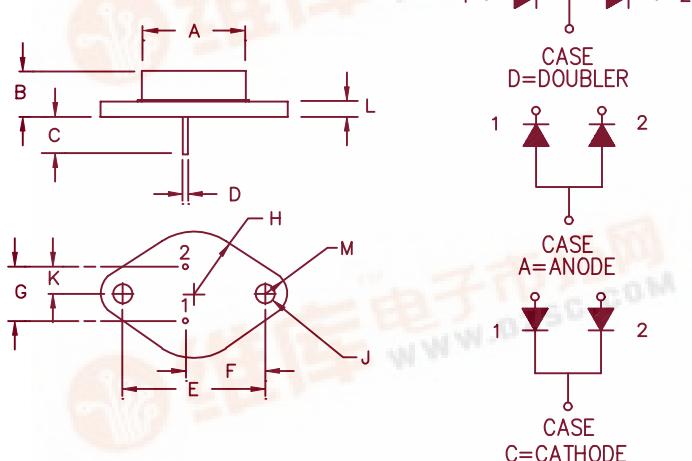

	Dim. Inches		Millimeter		
	Minimum	Maximum	Minimum	Maximum	Notes
A	—	.875	—	22.23	Dia.
B	.250	.450	6.35	11.43	
C	.435	—	11.05	—	
D	.038	.043	.97	1.09	Dia.
E	1.177	1.197	29.90	30.40	
F	.655	.675	16.64	17.15	
G	.420	.440	10.67	11.18	
H	—	.525	—	13.34	Rad.
J	.151	.161	3.84	4.09	Dia.
K	.205	.225	5.21	5.72	
L	—	.135	—	3.43	
M	—	.188	—	4.78	Rad.

TO-204AA (TO-3)

Microsemi Catalog Number	Working Reverse Voltage	Peak Reverse Voltage
SD241*	35V	35V
SD24145*	45V	45V

*ADD D, C, or A

- Schottky Barrier Rectifier
- Guard Ring Protection
- Low Forward Voltage
- V_{RRM} – 35 & 45V
- 30 Amperes
- Reverse Energy Tested

Electrical Characteristics Per Leg

Average forward current (standard)	F(AV) 30 Amps
Average forward current (reverse)	F(AV) 30 Amps
Maximum surge current	FSM 600 Amps
Max repetitive peak reverse current	R(OV) 2 Amps
Max peak forward voltage	V FM .57 Volts
Max peak forward voltage	V FM .70 Volts
Max peak reverse current	RM 25 mA
Max peak reverse current	RM 1.5 mA
Typical junction capacitance per leg	C J 1350 pF

$T_C = 148^\circ\text{C}$, Square wave, $R_{\theta JC} = 1.4^\circ\text{C}/\text{W}$
$T_C = 132^\circ\text{C}$, Square wave, $R_{\theta JC} = 2.2^\circ\text{C}/\text{W}$
8.3 ms, half sine $T_J = 175^\circ\text{C}$
$f = 1 \text{ KHz}, 25^\circ\text{C}, 1 \mu\text{sec}$ Square wave
$ FM = 30: T_J = 175^\circ\text{C}^*$
$ FM = 30: T_J = 25^\circ\text{C}^*$
$V_{RRM}, T_J = 125^\circ\text{C}^*$
$V_{RRM}, T_J = 25^\circ\text{C}$
$V_R = 5.0\text{V}, T_J = 25^\circ\text{C}$

*Pulse test: Pulse width 300 μsec , Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T _{STG}	-65°C to 175°C
Operating junction temp range	T _J	-65°C to 175°C
Maximum thermal resistance (standard polarity)	R _{θJC}	1.4°C/W Junction to case
Maximum thermal resistance (reverse polarity)	R _{θJC}	2.2°C/W Junction to case
Typical thermal resistance (greased)	R _{θCS}	0.5°C/W Case to sink
Weight		1.0 ounces (28 grams) typical

SD241, SD24145

Figure 1
Typical Forward Characteristics

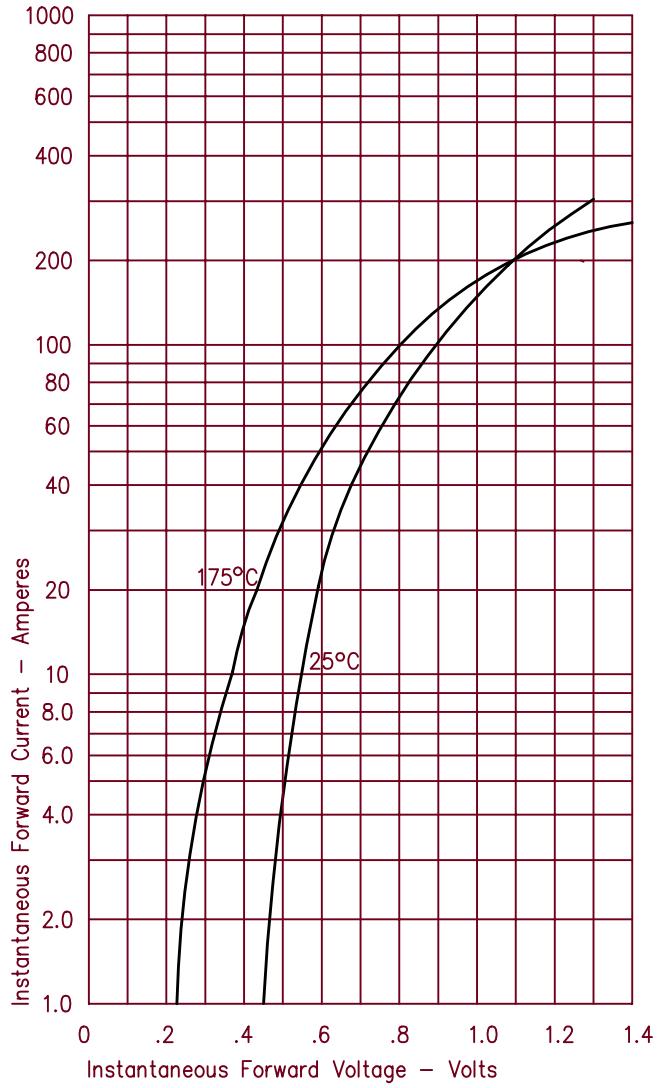


Figure 2
Typical Reverse Characteristics

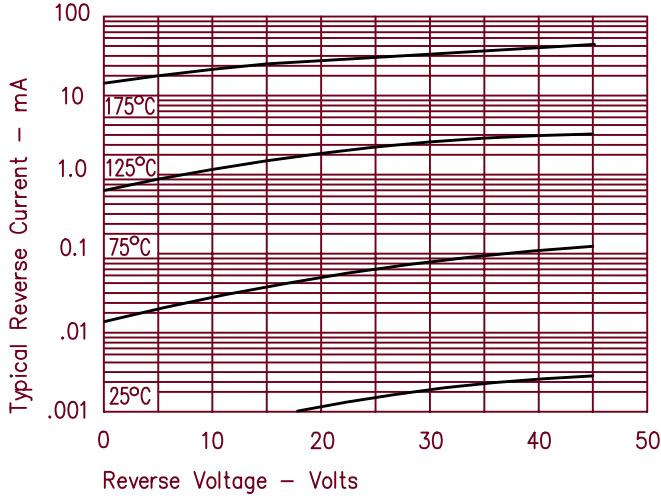


Figure 3
Typical Junction Capacitance

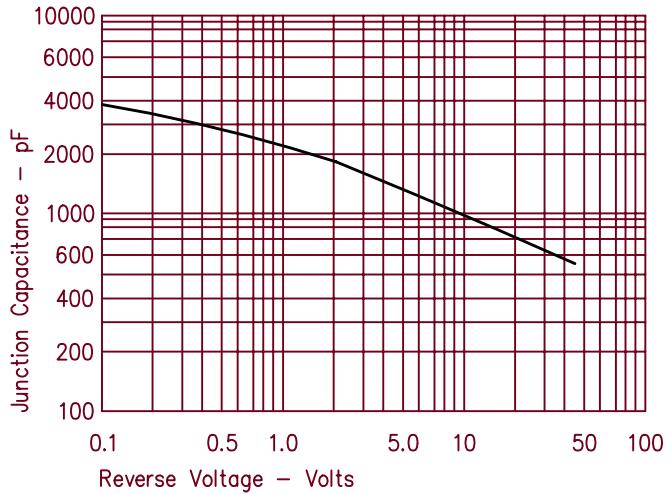


Figure 4
Forward Current Derating - Standard Polarity


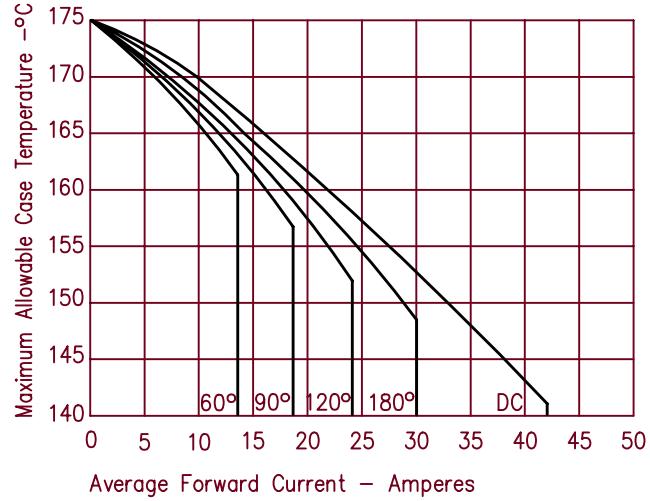


Figure 5
Forward Current Derating - Reverse Polarity

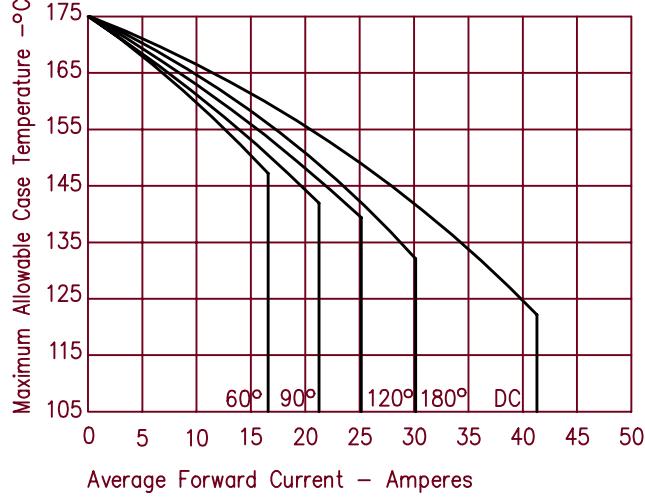

SD241, SD24145

Figure 6
Maximum Forward Power Dissipation – Standard Polarity

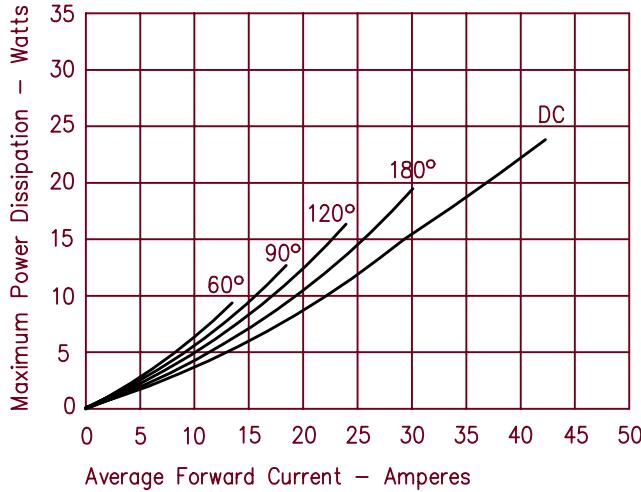


Figure 7
Maximum Forward Power Dissipation – Reverse Polarity

