


# SD241P

## SCHOTTKY RECTIFIER

**Reverse Voltage - 45 Volts    Forward Current - 30.0 Amperes**

### TO-247AD

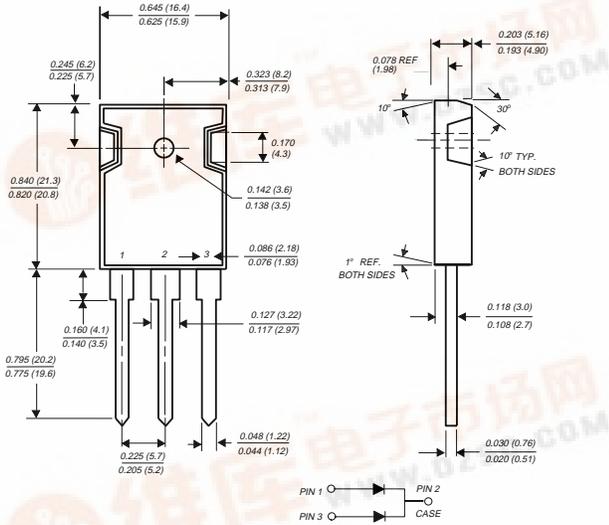

Dimensions in inches and (millimeters)

### FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classifications 94V-0
- ◆ Dual rectifier construction, positive center-tap
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ High current capability, low forward voltage drop
- ◆ High surge capability
- ◆ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ◆ Guardring for overvoltage protection
- ◆ High temperature soldering guaranteed: 250°C, 0.17" (4.3mm) from case for 10 seconds

### MECHANICAL DATA

**Case:** JEDEC TO-247AD molded plastic body  
**Terminals:** Lead solderable per MIL-STD-750, Method 2026

**Polarity:** As marked

**Mounting Position:** Any

**Mounting Torque:** 10 in. - lbs. max.

**Weight:** 0.2 ounce, 5.6 grams

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	SD241P	UNITS
Maximum repetitive peak reverse voltage at T <sub>C</sub> =25°C	V <sub>RRM</sub>	45	Volts
Maximum blocking voltage at T <sub>C</sub> =25°C	V <sub>DC</sub>	45	Volts
Maximum working peak reverse voltage	V <sub>RWM</sub>	35	Volts
Maximum average forward rectified current at T <sub>C</sub> =105°C	I <sub>(AV)</sub>	30.0	Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	400.0	Amps
Peak repetitive reverse surge current (NOTE 1)	I <sub>RSM</sub>	2.0	Amps
Maximum instantaneous forward voltage per leg at (NOTE 2)	I <sub>F</sub> =10A, T <sub>C</sub> =125°C I <sub>F</sub> =20A, T <sub>C</sub> =125°C	0.47 0.60	Volts
Maximum instantaneous reverse current reverse voltage per leg at V <sub>R</sub> =35V (NOTE 2)	T <sub>C</sub> =25°C T <sub>C</sub> =125°C	1.0 100.0	mA
Voltage rate of change at V <sub>R</sub> =35V	dv/dt	10,000	V/μs
Maximum thermal resistance (NOTE 3)	R <sub>θJC</sub>	1.4	°C
Operating junction temperature range	T <sub>J</sub>	-65 to +150	°C
Storage temperature range	T <sub>STG</sub>	-65 to +175	°C

**NOTES:**

- (1) 2.0μs pulse width, f=1.0 KHz
- (2) Pulse test: 300μs pulse width, 1% duty cycle
- (3) Thermal resistance from junction of case per leg



# RATINGS AND CHARACTERISTIC CURVES SD241P

FIG. 1 - FORWARD CURRENT DERATING CURVE

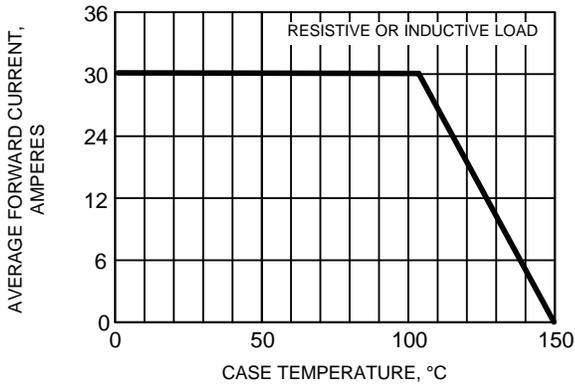


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

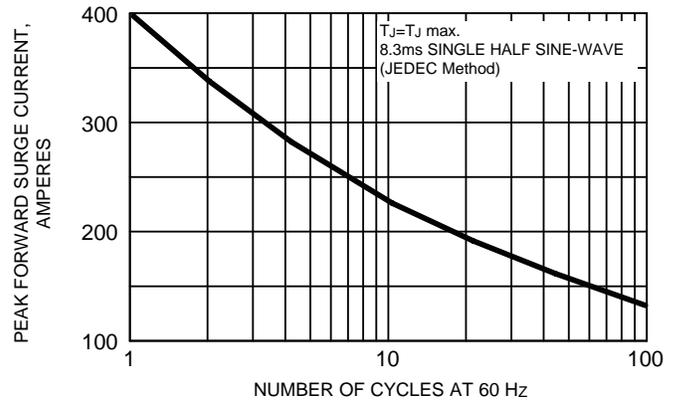


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

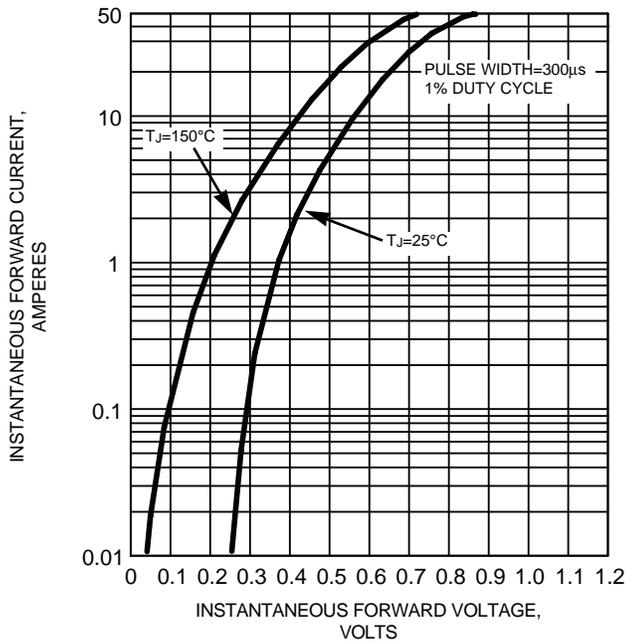


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS PER LEG

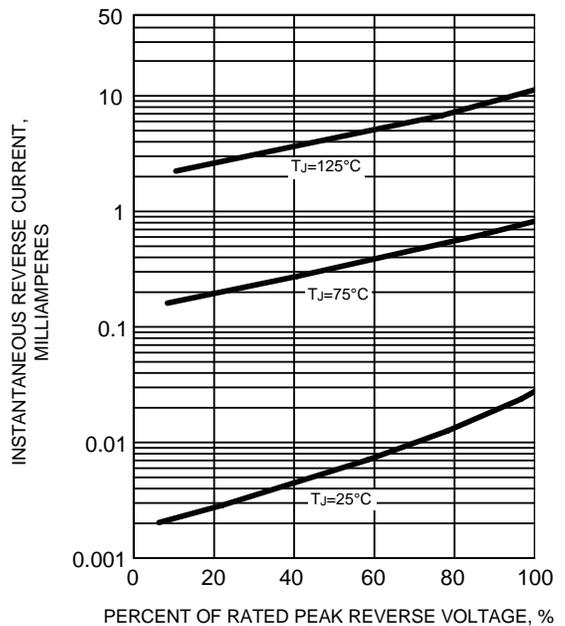


FIG. 5 - TYPICAL JUNCTION CAPACITANCE PER LEG

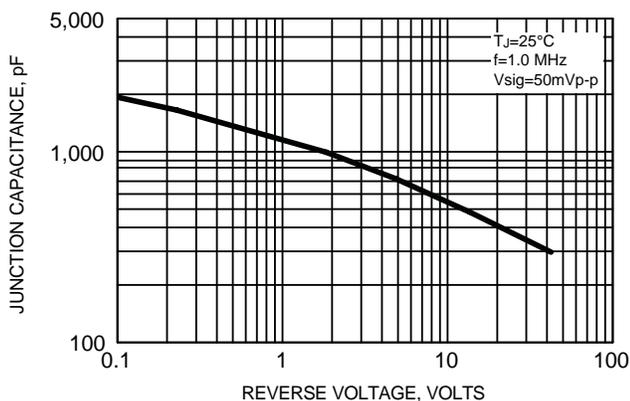


FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG

