



DISCRETE POWER DIODES and THYRISTORS


DATA BOOK

STANDARD RECOVERY DIODES
Hockey Puk Version
Features

- Wide current range
- High voltage ratings up to 2500V
- High surge current capabilities
- Diffused junction
- Hockey Puk version
- Case style DO-200AC (K-PUK)

3000A
Typical Applications

- Converters
- Power supplies
- Machine tool controls
- High power drives
- Medium traction applications

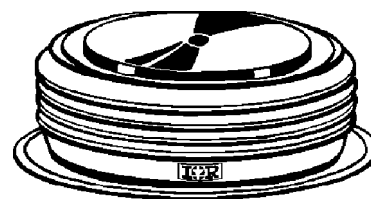
case style DO-200AC (K-PUK)
Major Ratings and Characteristics

Parameters	SD2500C..K	Units
$I_{F(AV)}$	3000	A
@ T_{hs}	55	°C
$I_{F(RMS)}$	5000	A
@ T_{hs}	25	°C
I_{FSM} @ 50Hz	31000	A
@ 60Hz	32460	A
I^2t @ 50Hz	4810	KA ² s
@ 60Hz	4390	KA ² s
V_{RRM} range	1200 to 2500	V
T_J	- 40 to 180	°C

SD2500C..K Series

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	Voltage Code	V_{RRM} , maximum repetitive peak reverse voltage V	V_{RSM} , maximum non-repetitive peak rev. voltage V	I_{RRM} max. @ $T_J = 180^\circ\text{C}$ mA
SD2500C..K	12	1200	1300	75
	16	1600	1700	
	20	2000	2100	
	25	2500	2600	

Forward Conduction

Parameter	SD2500C..K	Units	Conditions
$I_{F(AV)}$ Max. average forward current @ Heatsink temperature	3000 (1550)	A	180° conduction, half sine wave
	55 (85)	°C	Double side (single side) cooled
$I_{F(RMS)}$ Max. RMS forward current	5000	A	@ 25°C heatsink temperature double side cooled
I_{FSM} Max. peak, one-cycle forward, non-repetitive surge current	31000	A	t = 10ms No voltage
	32460		t = 8.3ms reapplied
	26050		t = 10ms 100% V_{RRM}
	27300		t = 8.3ms reapplied
I^2t Maximum I^2t for fusing	4810	KA ² s	t = 10ms No voltage
	4390		t = 8.3ms reapplied
	3400		t = 10ms 100% V_{RRM}
	3100		t = 8.3ms reapplied
$I^2\sqrt{t}$ Maximum $I^2\sqrt{t}$ for fusing	48100	KA ² √s	t = 0.1 to 10ms, no voltage reapplied
$V_{F(TO)1}$ Low level value of threshold voltage	0.76	V	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)}), T_J = T_J \text{ max.}$
$V_{F(TO)2}$ High level value of threshold voltage	0.97		$(I > \pi \times I_{F(AV)}), T_J = T_J \text{ max.}$
r_{f1} Low level value of forward slope resistance	0.16	mΩ	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)}), T_J = T_J \text{ max.}$
r_{f2} High level value of forward slope resistance	0.13		$(I > \pi \times I_{F(AV)}), T_J = T_J \text{ max.}$
V_{FM} Max. forward voltage drop	1.41	V	$I_{pk} = 4000A, T_J = T_J \text{ max, } t_p = 10\text{ms sinusoidal wave}$

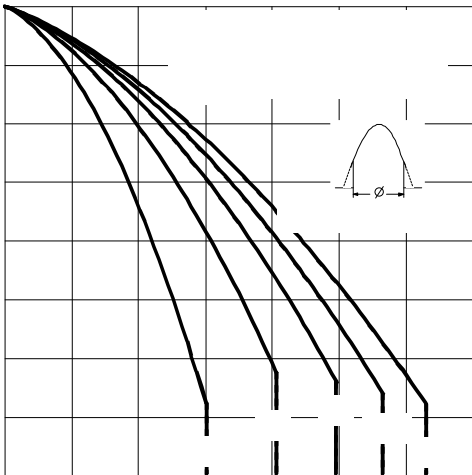


Fig. 3 - Current Ratings Characteristics

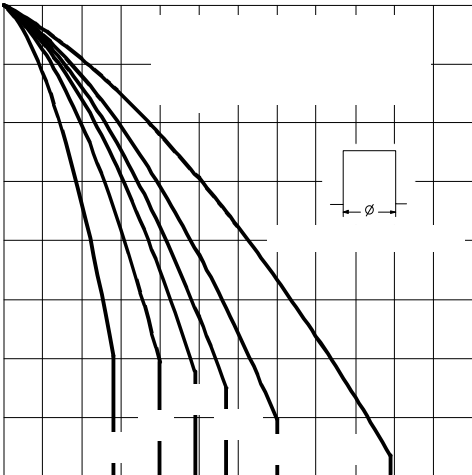


Fig. 4 - Current Ratings Characteristics

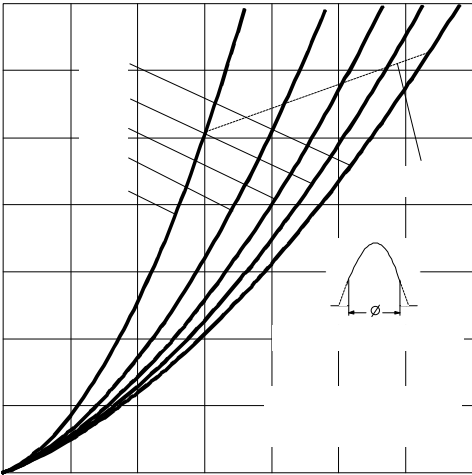


Fig. 5 - Forward Power Loss Characteristics

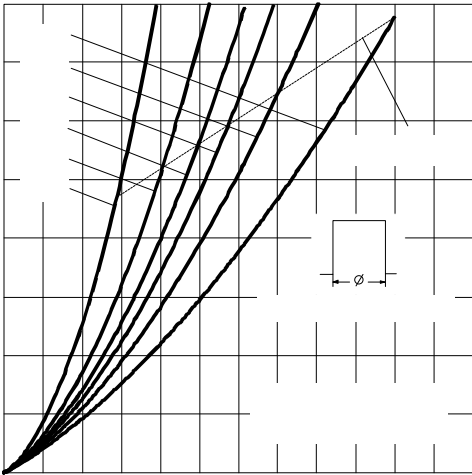
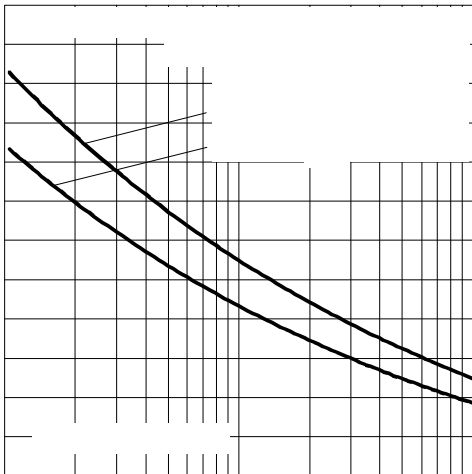
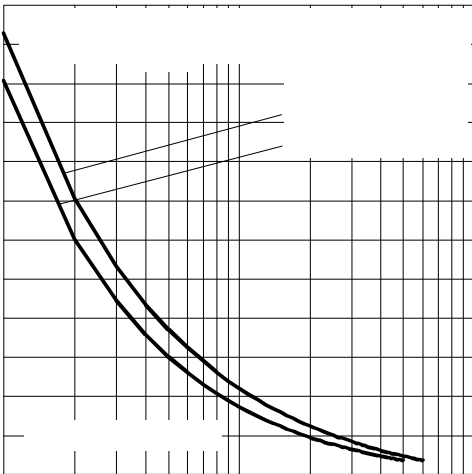


Fig. 6 - Forward Power Loss Characteristics



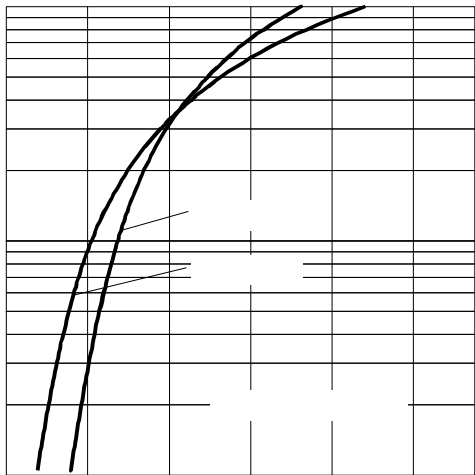


Fig. 9 - Forward Voltage Drop Characteristics

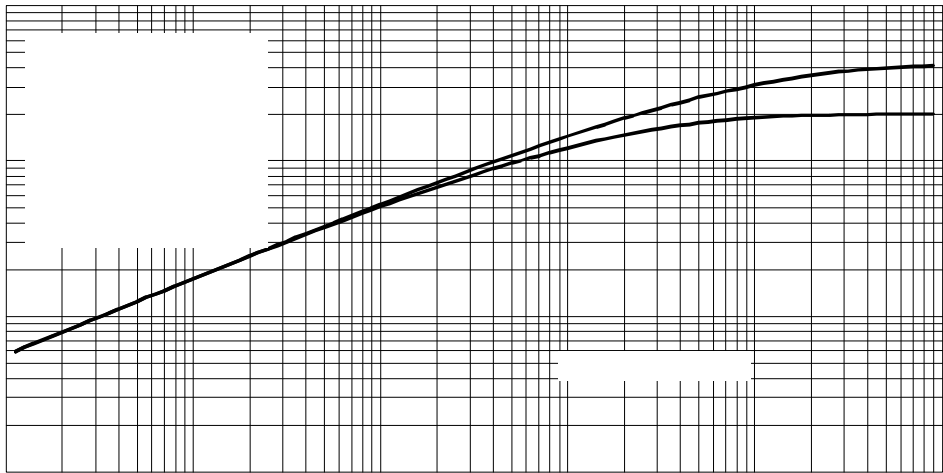


Fig. 10 - Thermal Impedance Z_{thJC} Characteristics

Thermal and Mechanical Specifications

Parameter	SD2500C..K	Units	Conditions
T_J Max. junction operating temperature range	-40 to 180	°C	
T_{stg} Max. storage temperature range	-55 to 200		
R_{thJ-hs} Max. thermal resistance, junction to heatsink	0.042 0.020	K/W	DC operation single side cooled DC operation double side cooled
F Mounting force, $\pm 10\%$	22250 (2250)	N (Kg)	
wt Approximate weight	425	g	
Case style	DO-200AC(K-PUK)		See Outline Table


 ΔR_{thJ-hs} Conduction

(The following table shows the increment of thermal resistance R_{thJ-hs} when devices operate at different conduction angles than DC)

Conduction angle	Sinusoidal conduction		Rectangular conduction		Units	Conditions
	Single Side	Double Side	Single Side	Double Side		
180°	0.002	0.002	0.001	0.001	K/W	$T_J = T_{J \text{ max.}}$
120°	0.002	0.002	0.002	0.002		
90°	0.003	0.003	0.003	0.003		
60°	0.004	0.004	0.004	0.004		
30°	0.007	0.007	0.007	0.007		

Ordering Information Table

Device Code

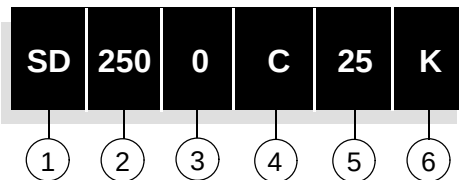

- 1** - Diode
- 2** - Essential part number
- 3** - 0 = Standard recovery
- 4** - C = Ceramic Puk
- 5** - Voltage code: code x 100 = V_{RRM} (see Voltage Ratings Table)
- 6** - K = Puk Case DO-200AC (K-PUK)

SD2500C..K Series

Outline Table

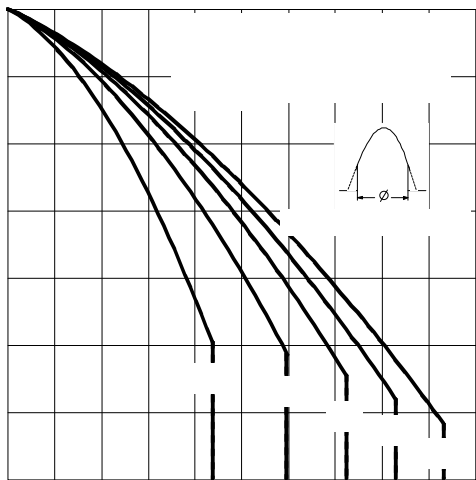
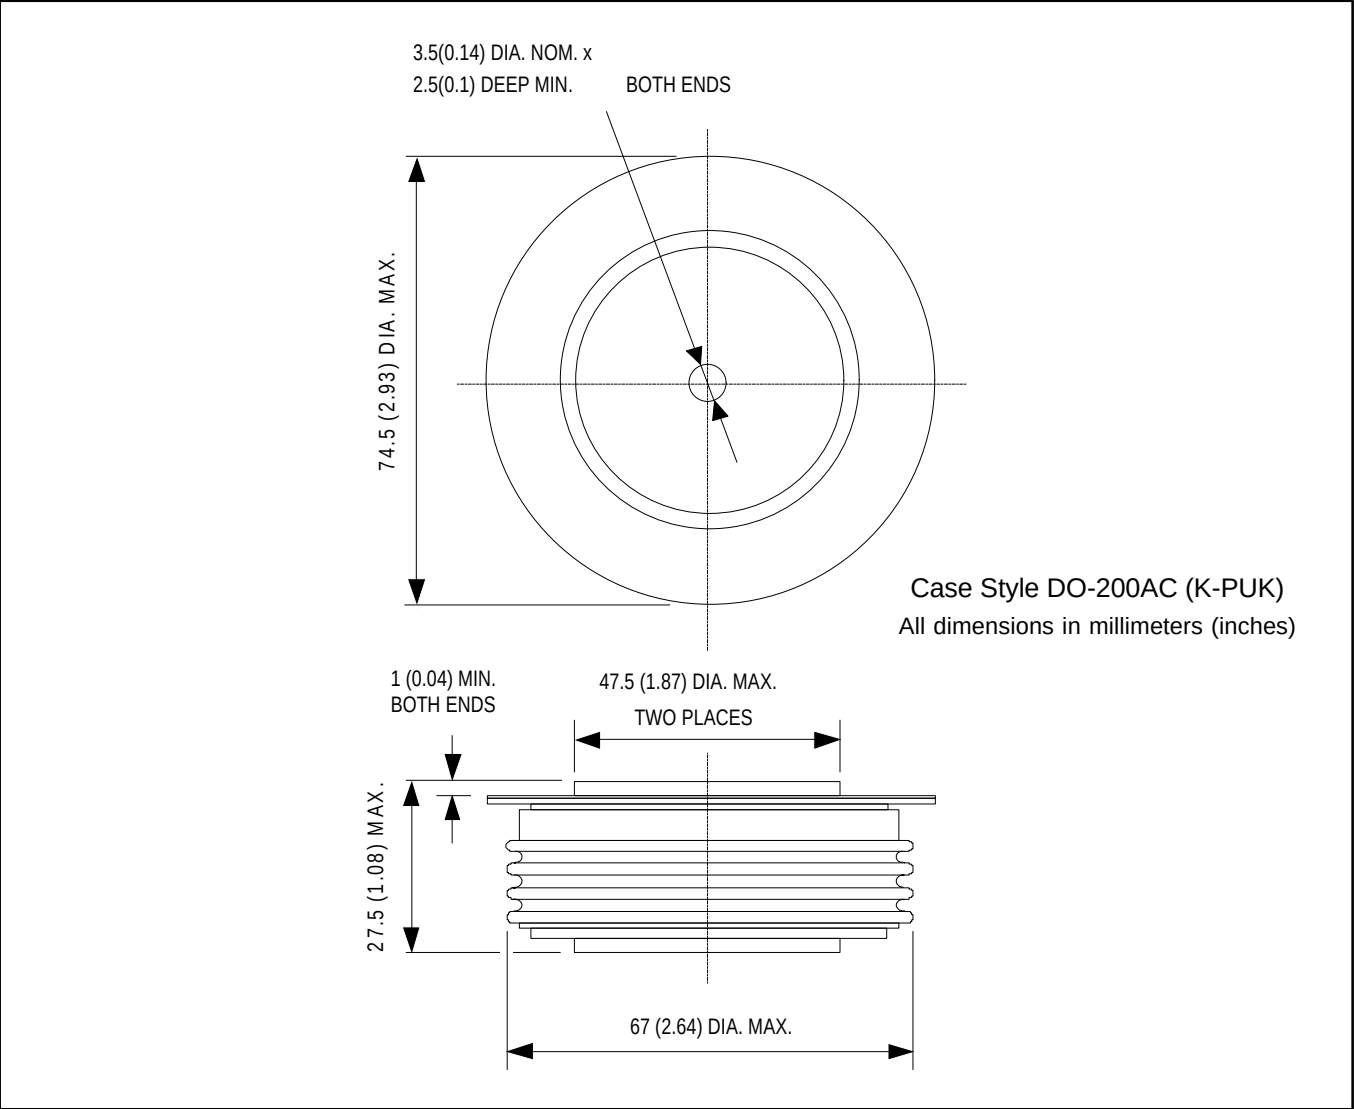


Fig. 1 - Current Ratings Characteristics

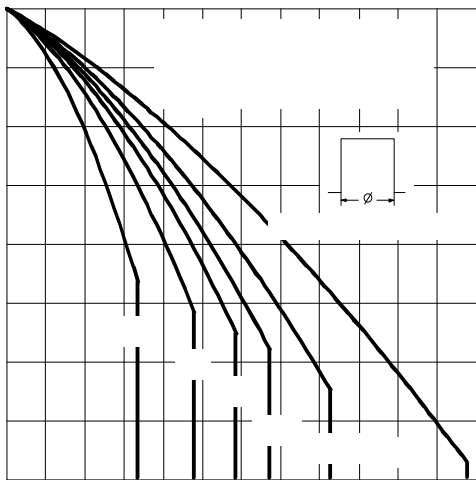


Fig. 2 - Current Ratings Characteristics