



DATA SHEET

SD820CT~SD8100CT

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS

VOLTAGE 20 to 100 Volts CURRENT - 8 Ampere

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- For surface mounted applications
- Low profile package
- Built-in strain relief
- Low power loss, High efficiency
- High surge capacity
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed: 260°C/10 seconds at terminals

MECHANICAL DATA

Case: TO-251AB molded plastic


Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: As marking

Weight: 0.015 ounces, 0.4 grams.

TO-251AB

Unit: inch (mm)

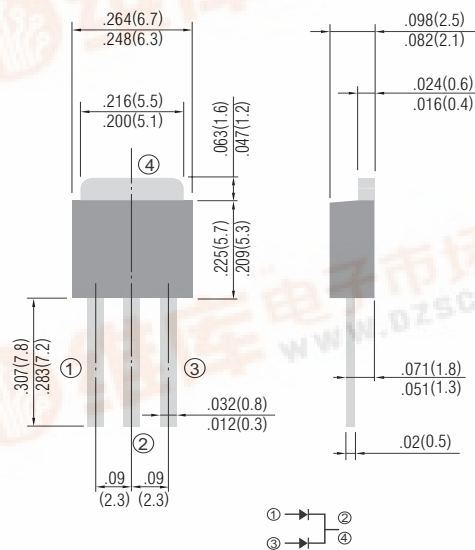

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

	SD820CT	SD830CT	SD840CT	SD860CT	SD880CT	SD8100CT	UNITS
Maximum Recurrent Peak Reverse Voltage	20	30	40	60	80	100	V
Maximum RMS Voltage	14	21	28	42	56	70	V
Maximum DC Blocking Voltage	20	30	40	60	80	100	V
Maximum Average Forward Rectified Current at Tc=85°C	8						A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	85						A
Maximum Instantaneous Forward Voltage at 4.0A (Note 1)	0.55			0.75	0.85		V
Maximum DC Reverse Current at Tc=25°C DC Blocking Voltage per element Tc=100°C	0.2 20						mA
Maximum Thermal Resistance (Note 2)	80						°C/W
Operating and Storage Temperature Range	-55 to +125						°C
Storage Temperature Range	-65 to +150						°C

NOTES:

1. Thermal Resistance Junction to Ambient .

RATING AND CHARACTERISTIC CURVES

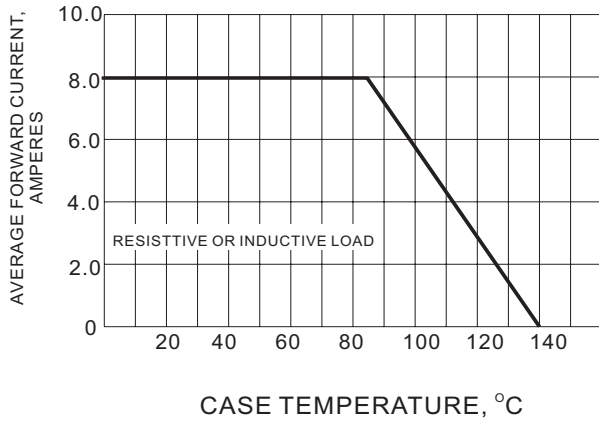


Fig.1- FORWARD CURRENT DERATING CURVE

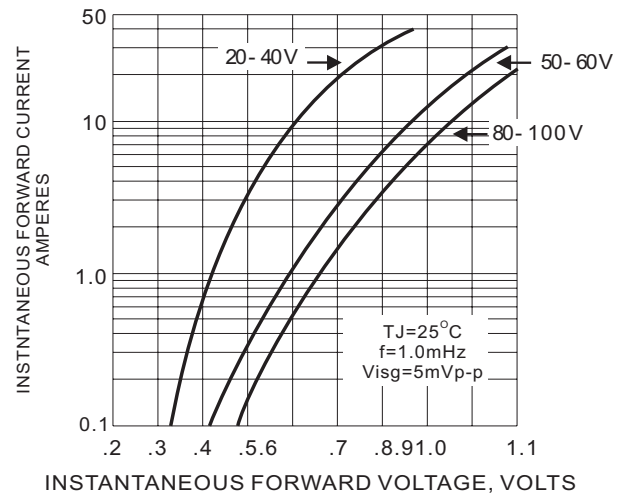


Fig.2- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC

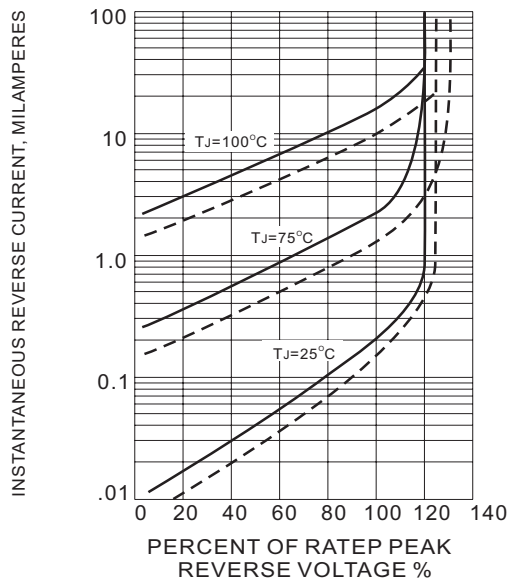


Fig.3- TYPICAL REVERSE CHARACTERISTICS

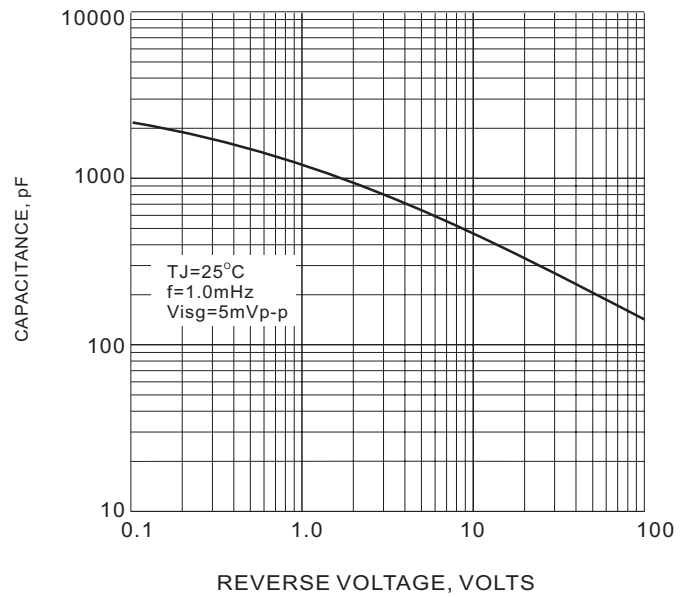


Fig.4- TYPICAL JUNCTION CAPACITANCE

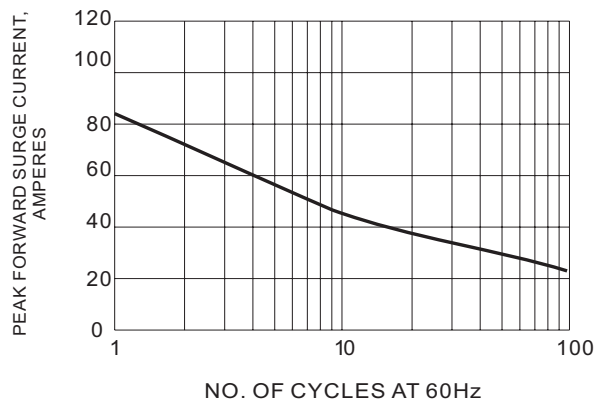


Fig.5- MAXIMUM NON-REPETITIVE SURGE CURRENT