


Silicon Power Rectifier SDM300

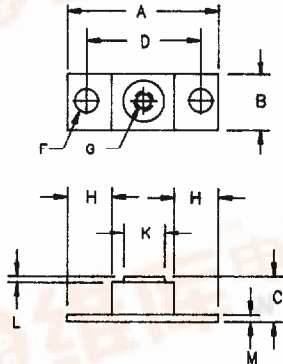

Dim.	Inches		Millimeters		Notes
	Min.	Max.	Min.	Max.	
A	---	2.650	---	67.31	
B	1.240	1.260	31.49	32.00	
C	---	.925	---	23.49	
D	2.00	BSC	50.80	BSC	
F	0.320	0.340	8.13	8.64	Dia.
G	---	---	5/16-18 UNC	---	
H	0.630	---	16.00	---	
K	0.610	0.640	15.49	16.26	
L	---	.100	---	2.54	
M	0.182	0.192	4.62	4.88	

Microsemi Catalog Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
SDM30002*	200V	200V
SDM30004*	400V	400V
SDM30006*	600V	600V
SDM30008*	800V	800V
SDM30010*	1000V	1000V
SDM30012*	1200V	1200V

*Add Suffix A for Common Anode

- Compact Package
- Glass Passivated Die
- 300 Amp Current Rating
- Non-Isolated Baseplate
- Low Profile

Electrical Characteristics

Average forward current	I _{F(AV)} 300 Amps	T _C = 130°C, half sine, R _{θJC} = 0.15°C/W
Maximum surge current	I _{FSM} 5500 Amps	8.3 ms, half sine, T _J = 175°C
Max I _{2t} for fusing	I _{2t} 125990 A ² s	
Max peak forward voltage	V _{FM} 1.25 Volts	I _{FM} = 1000A; T _J = 25°C*
Max peak forward voltage	V _{FM} 1.20 Volts	I _{FM} = 1000A; T _J = 175°C*
Max peak reverse current	I _{RM} 10 mA	V _{RRM} , T _J = 150°C*
Max peak reverse current	I _{RM} 250 μA	V _{RRM} , T _J = 25°C*
Typical reverse current	I _{RM} 17 μA	V _{RRM} , T _J = 25°C*

*Pulse test: Pulse width 8.33 μsec, Duty cycle <1%

Thermal and Mechanical Characteristics

Storage temp range	T _{STG}	-40°C to 175°C
Operating junction temp range	T _J	-40°C to 175°C
Max thermal resistance	R _{θJC}	0.15°C/W Junction to case
Typical thermal resistance	R _{θCS}	0.04°C/W Case to sink
Terminal Torque		75 inch pounds maximum
Mounting Base Torque		40 inch pounds maximum
Typical Weight		4.93 ounces (140 grams) typical

Microsemi Corp.
Colorado

PH: 303-469-2161
FAX: 303-466-3775

SDM300

Figure 1
Typical Forward Characteristics

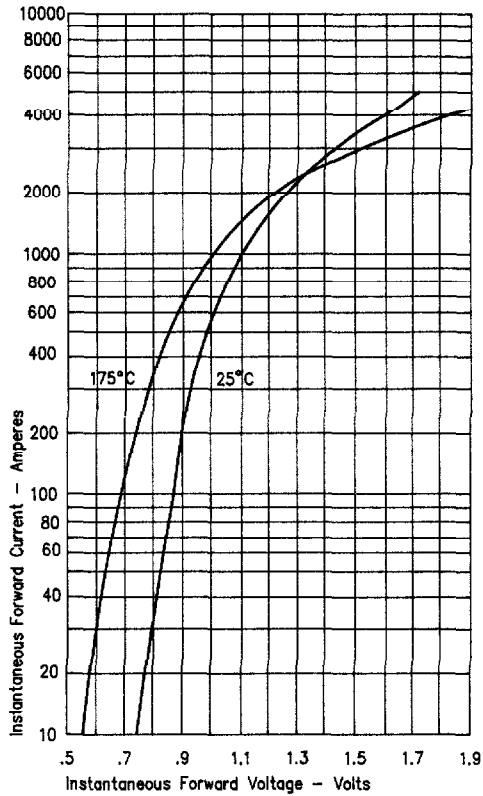


Figure 3
Forward Current Derating

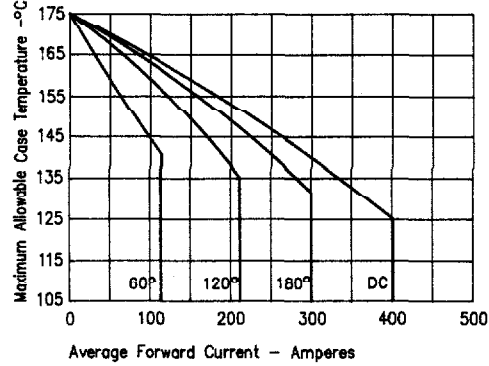


Figure 4
Maximum Forward Power Dissipation

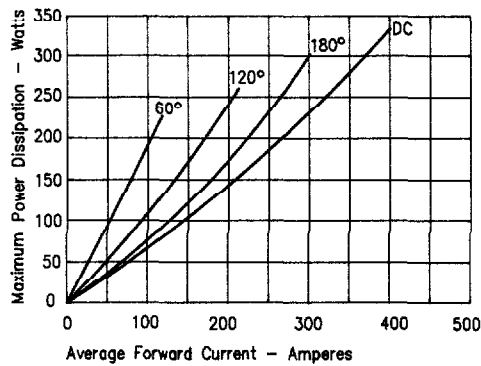


Figure 2
Typical Reverse Characteristics


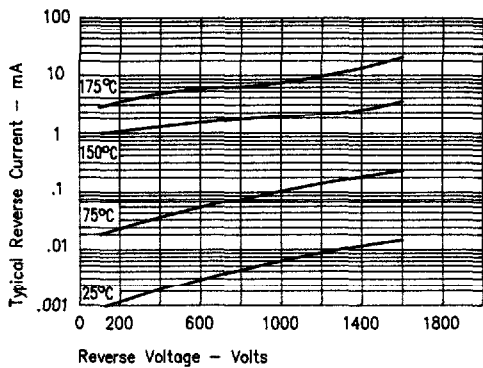


Figure 5
Transient Thermal Impedance



E

SDM300

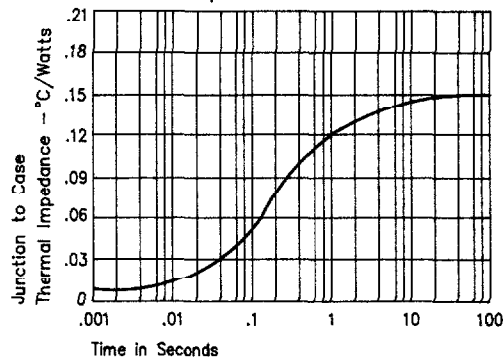