



SE2522BL

RangeCharger™ 2.4GHz +23 dBm Power Amplifier

Preliminary Information

Applications

- DSSS 2.4GHz WLAN (IEEE802.11b)
- OFDM 2.4GHz WLAN (IEEE802.11g)
- Access Points, PCMCIA, PC Cards
- 2.4GHz Cordless Telephones

Features

- High output power amplifier
- +23dBm P_{1dB} at 3.3V
- +25dBm P_{sat} at 3.3V
- Integrated Power Detector
- Integrated control for output power and DC current
- Single supply voltage: 2.7 to 3.6 V
- Pin compatible with SiGe Semiconductor's SE2522L
- Exceptional temperature stability <1dB output power variation from -40 to +85°C
- Small outline plastic package

Product Description

The SE2522BL is a 2.4GHz power amplifier. The device is designed for use in the 2.4GHz ISM band for wireless LAN and cordless telephone applications. It incorporates a power detector for closed loop monitoring of output power.

For wireless LAN applications, the device meets the requirements of IEEE802.11b and delivers approximately +23dBm @ ACPR = -30dBc. In IEEE802.11g applications the PA delivers approximately 16dBm.

For cordless telephone applications, the SE2522BL delivers up to +25dBm saturated output power at 3.3V.

The SE2522BL includes a linear analog control (0.1 to 1.6V) for minimizing DC current consumption and maximizing PAE.


The SE2522BL contains a digital enable for device on/off control, ramping is typical 1 μ sec.

The SE2522BL contains an integrated power detector with an input power range of 15dB, and an accuracy of ± 1.0 dB. An accurate automatic level control function can easily be implemented using this detector circuit.

Ordering Information


| Type | Package | Remark |
|----------|------------------------|---------|
| SE2522BL | 3mm x 2mm 8 Pin QFN | Samples |

Functional Block Diagram

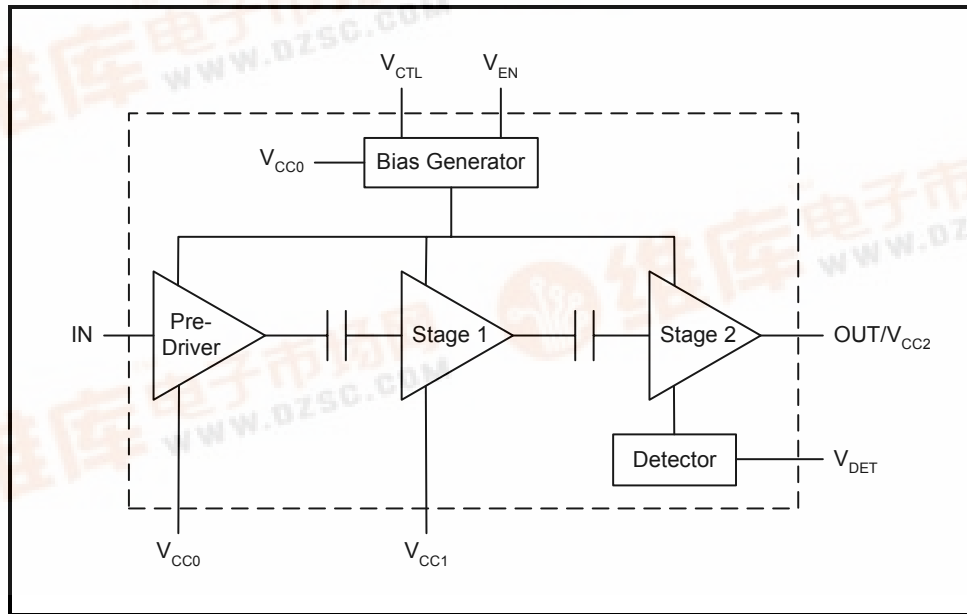

Pin Out Diagram

Note: Pads and die pad shown are at the bottom of package.

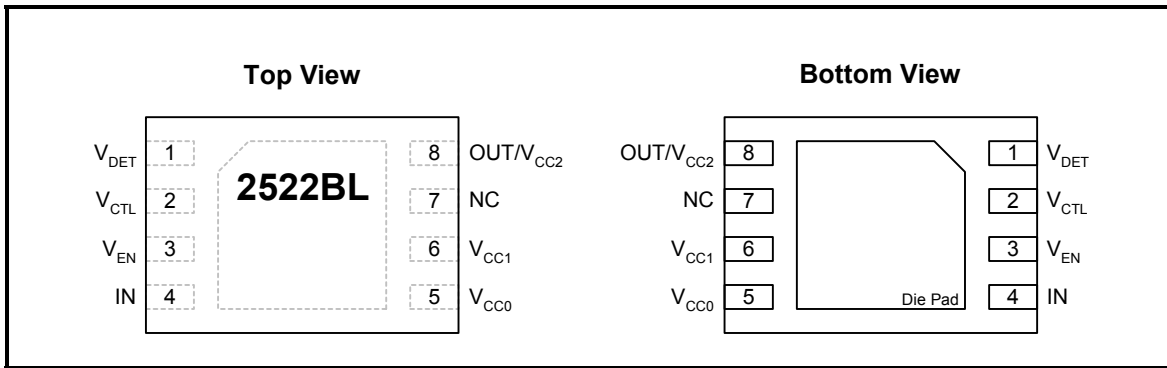

Pin Out Description

| Pin No. | Name | Description |
|---------|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | V _{DET} | Analog power detector output |
| 2 | V _{CTL} | Controls the RF output power and DC current level of the power amplifier. An analog control signal between 0.1V and 1.6V varies the PA output power between Min. and Max. values. |
| 3 | V _{EN} | Power Amplifier Enable pin. A digital control signal with logic high (power up) and logic low (power down) is used to turn the device on and off. |
| 4 | IN | Power amplifier RF input, external input matching network with DC blocking is required. |
| 5 | V _{CC0} | Bias block and Pre-driver collector supply voltage. |
| 6 | V _{CC1} | Stage 1 collector supply voltage, an external inter-stage matching network is required |
| 7 | NC | No Connect |
| 8 | OUT/V _{CC2} | PA Output and Stage 2 collector supply voltage, external output matching network with DC blocking is required. |
| Die Pad | GND | Heat-slug Die Pad is thermal and electrical ground |

Absolute Maximum Ratings

These are stress ratings only. Exposure to stresses beyond these maximum ratings may cause permanent damage to, or affect the reliability of the device. Avoid operating the device outside the recommended operating conditions defined below. This device is ESD sensitive. Handling and assembly of this device should be at ESD protected workstations.

| Symbol | Parameter | Min. | Max. | Unit |
|------------------|-------------------------------------------------------------------------------|------|-----------------|------|
| V _{CC} | Supply Voltage on pins V _{CC0} , V _{CC1} , V _{CC2} | -0.3 | +3.6 | V |
| V _{CTL} | Analog Control Voltage | -0.3 | V _{CC} | V |
| V _{EN} | Ramping Voltage | -0.3 | V _{CC} | V |
| P _{IN} | RF Input Power | | +8 | dBm |
| T _A | Operating Temperature Range | -40 | +85 | °C |
| T _{STG} | Storage Temperature Range | -40 | +150 | °C |
| T _j | Maximum Junction Temperature | | +150 | °C |

DC Electrical Characteristics

Conditions: V_{CC} = V_{EN} = 3.3V, V_{CTL} ≥ 1.6V, T_A = 25°C, unless otherwise noted.

| Symbol | Parameter | Min. | Typ. | Max. | Unit |
|----------------------|-------------------------------------------------------------------------------------------------------|------|------|------|------|
| V _{CC} | Supply Voltage | 2.7 | 3.3 | 3.6 | V |
| I _{CC-1DB} | Supply Current at P _{1DBH} | | 250 | | mA |
| I _{CC-SAT} | Supply Current at P _{SAT} , V _{CC} = 3.3V | | 325 | | mA |
| ΔI _{CCTEMP} | Supply Current variation over temperature from T _A = 25°C (-40°C < T _A < +85°C) | | 25 | | % |
| V _{CTL} | Recommended PA Gain and Bias Control Voltage Range | 0.1 | | 1.6 | V |
| I _{CTL} | V _{CTL} current requirement | | | 275 | μA |
| V _{ENH} | Logic High Voltage | 1.0 | | | V |
| V _{ENL} | Logic Low Voltage | | | 0.5 | V |
| I _{OFF} | Leakage Current when V _{EN} = 0V. | | 1 | 10 | μA |

AC Electrical Characteristics

Conditions: $V_{CC} = V_{EN} = 3.3V$, $V_{CTL} \geq 1.6V$, $P_{IN} < -8dBm$, $T_A = 25^\circ C$, $f = 2.45 GHz$, input and output externally matched to 50Ω , unless otherwise noted.

| Power Amplifier | | | | | | |
|-----------------|--------------------------------------------------------------------------------|------|---------------------------------------------------------------|------|-------|------------|
| Symbol | Parameter | Note | Min. | Typ. | Max. | Unit |
| f_{L-U} | Frequency Range | | 2400 | | 2485 | MHz |
| P_{1dBH} | High Gain 1dB Compressed Output Power, $V_{CTL} \geq 1.6V$ | 1 | 21.0 | 23 | 25.0 | dBm |
| P_{1dBL} | Low Gain 1dB Compressed Output Power, $V_{CTL} = 0.1V$ | 1 | | -5 | | dBm |
| P_{SAT} | Saturated Output Power, $P_{IN} = 0dBm$, $V_{CTL} \geq 1.6V$, $V_{CC} = .3V$ | 2 | | 25 | | dBm |
| G | Small Signal Gain | | | 35 | | dB |
| G_{VAR} | Gain Variation over band (2400-2485 MHz) | | | 1.0 | 2.0 | dB |
| 2f,3f,4f,5f | Harmonics | 3 | | | < -30 | dBm/100kHz |
| S_{21OFF} | Forward Gain when PA is "OFF" State, $P_{IN} \leq 0dBm$, $V_{EN} = 0V$ | | | -30 | | dB |
| S12 | Reverse Gain | | | -42 | -32 | dB |
| T_R | Rise and Fall Time | 4 | | | 1.2 | μs |
| STAB | Stability ($P_{IN} \leq 0dBm$, Load VSWR = 6:1) | | All non-harmonically related outputs less than -50 dBc/100kHz | | | |

- Notes:**
- (1) Matching networks optimized for linear output power performance.
 - (2) With matching networks optimized for saturated output power performance.
 - (3) Harmonic levels and ACPR are greatly affected by topology of external matching networks.
 - (4) Rise and Fall Time is defined between 10% and 90% final output power level.







Conditions: $V_{CC} = 3.3V$, $f = 2.4-2.5GHz$, $T_A = 25^\circ C$, PA Output externally matched to 50Ω , unless otherwise noted.

| Power Detector | | | | | | |
|---------------------|-------------------------------------------------------------------|------|------|----------|------|-----------|
| Symbol | Parameter | Note | Min. | Typ. | Max. | Unit |
| PDR | Power detect range, peak power | | 6 | | 25 | dBm |
| PDT | PA power detect, response time, 5pF load | | | 0.1 | 0.8 | μ sec |
| PDS | PA power detect, slope, 10 to 23dBm peak. | 1,2 | 12 | 14 | 17 | dB/V |
| PDV _{max} | PA power detect, output voltage maximum, load > 5k Ω | 1,2 | | 1.7 | | V |
| PDV _{min} | PA power detect, output voltage minimum, load > 5k Ω | 1,2 | | 0.1 | | V |
| PDV _{p23} | PA power detect output voltage, P _{OUT} = 23dBm peak | 4 | | 1.1 | | V |
| PDVA _{p23} | PA power detect output voltage accuracy, P _{OUT} = 23dBm | | | ± 35 | | mV |

- Notes:** (1) Matching networks optimized for linear output power performance.
(2) PD response is dependant on PA output matching, above specifications are valid for SiGe recommended matching networks.


Typical Performance Characteristics

Conditions: $V_{CC} = 3.3V$, $V_{CTL} = 1.6V$, $V_{EN} = 3.3V$, $F = 2.45GHz$, $P_{IN} = -12dBm$, using IEEE802.11b modulation, and matching networks optimized for linear output power performance. Performance graphs are based on preliminary evaluation information and may differ from the AC and DC electrical specifications.

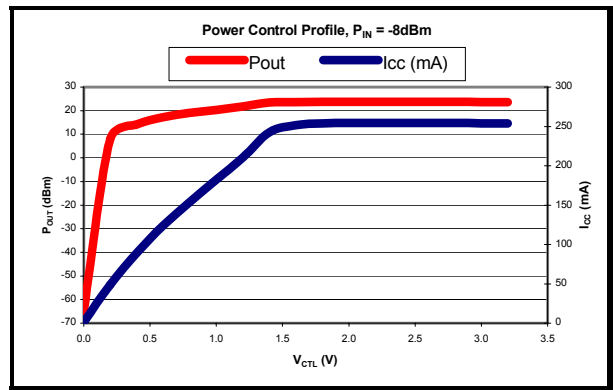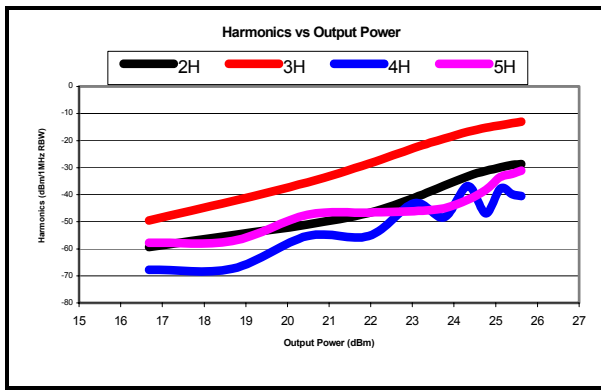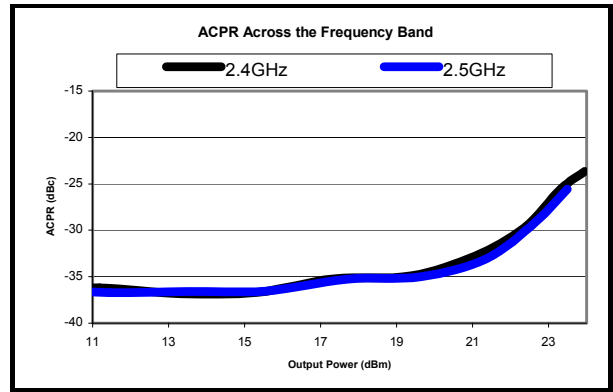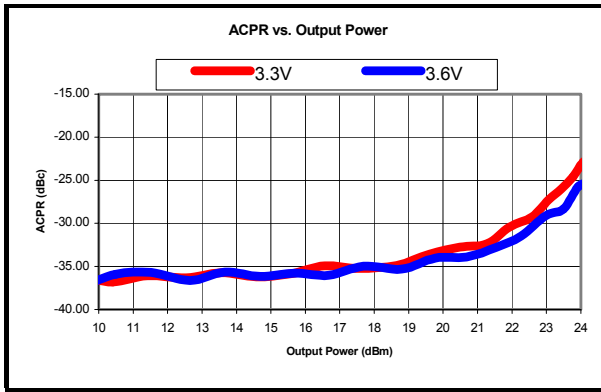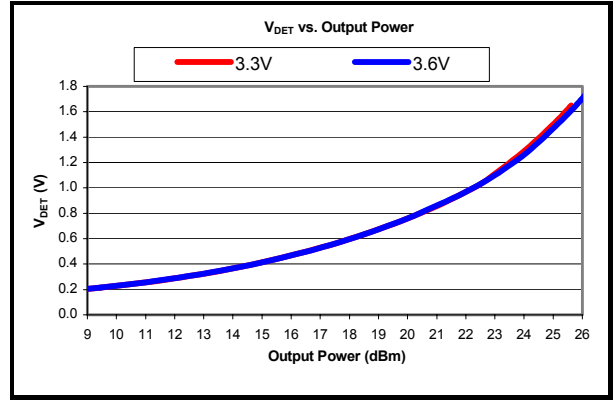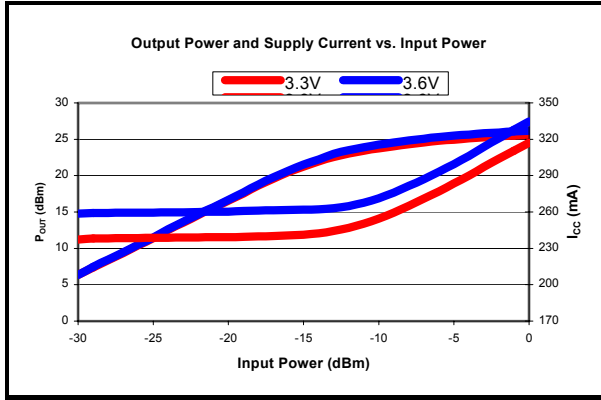

Note: Data is without harmonic filter

Package Description

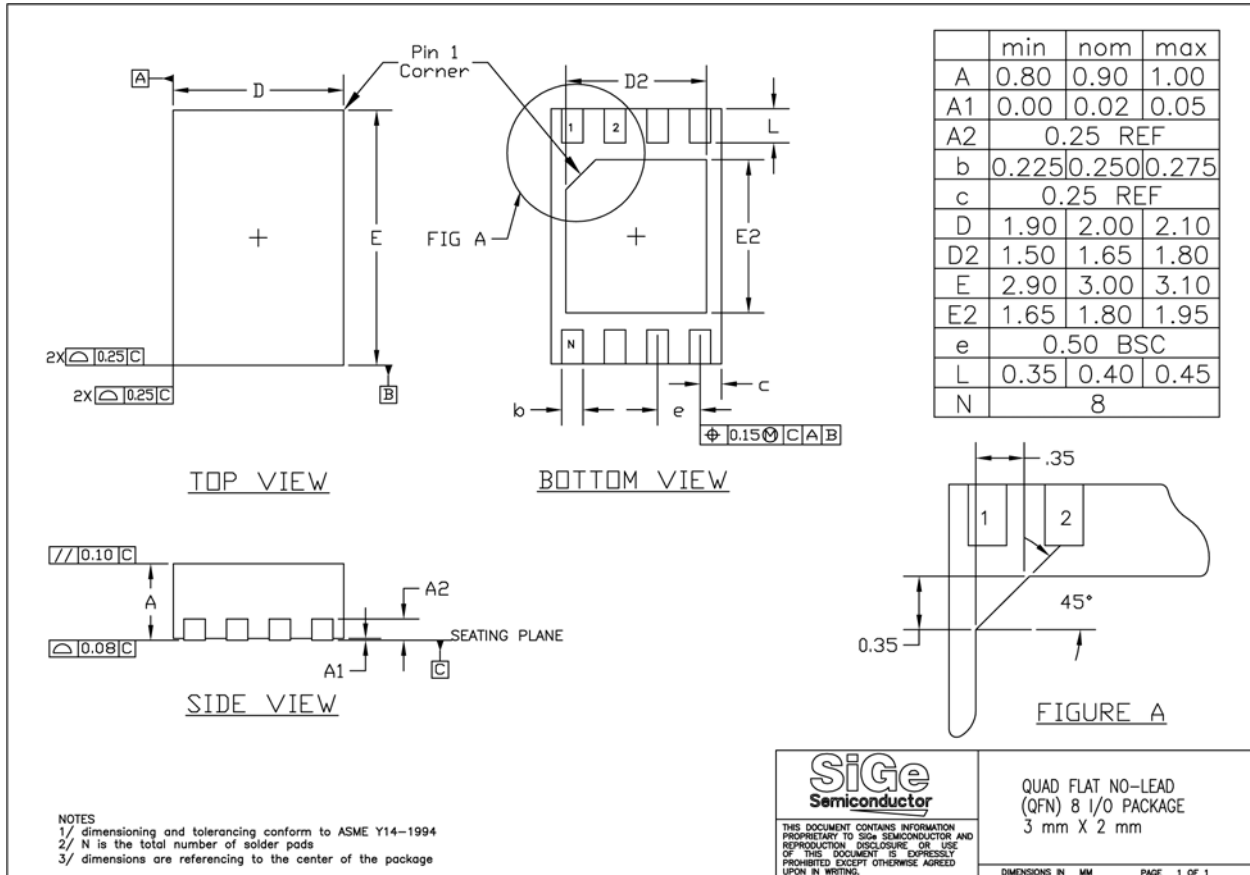



<http://www.sige.com>

Headquarters: Canada

Phone: +1 613 820 9244

Fax: +1 613 820 4933

2680 Queensview Drive

Ottawa ON K2B 8J9 Canada

sales@sige.com

San Diego

Phone: +1 858 668 3541

Fax: +1 858 668 3546

Hong Kong

Phone: +852 2491 8637

Fax: +852 2491 8937

United Kingdom

South Building, Walden Court
Parsonage Lane, Bishop's Stortford
Hertfordshire CM23 5DB

Phone: +44 1279 464 200

Fax: +44 1279 464 201

Product Preview

The datasheet contains information from the product concept specification. SiGe Semiconductor Inc. reserves the right to change information at any time without notification.

Preliminary Information

The datasheet contains information from the design target specification. SiGe Semiconductor Inc. reserves the right to change information at any time without notification.

Final

The datasheet contains information from the final product specification. SiGe Semiconductor Inc. reserves the right to change information at any time without notification. Production testing may not include testing of all parameters.

Information furnished is believed to be accurate and reliable and is provided on an "as is" basis. SiGe Semiconductor Inc. assumes no responsibility or liability for the direct or indirect consequences of use of such information nor for any infringement of patents or other rights of third parties, which may result from its use. No license or indemnity is granted by implication or otherwise under any patent or other intellectual property rights of SiGe Semiconductor Inc. or third parties. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SiGe Semiconductor Inc. products are NOT authorized for use in implantation or life support applications or systems without express written approval from SiGe Semiconductor Inc.

RangerCharger™, StreamCharger™, PointCharger™, and LightCharger™ are trademarks owned by SiGe Semiconductor Inc.

Copyright 2002 SiGe Semiconductor
All Rights Reserved