

# SHINDENGEN

## Schottky Rectifiers (SBD)

Dual

**SF30SC3L**
**30V 30A**

### FEATURES


- T<sub>j</sub>150
- Low V<sub>F</sub>=0.45V
- P<sub>RRSM</sub> avalanche guaranteed
- Fully Isolated Molding
- Dielectric strength 2kV guaranteed

### APPLICATION

- Switching power supply
- DC/DC converter
- Home Appliances, Office Equipment
- Telecommunication

### OUTLINE DIMENSIONS

Case : FTO-220

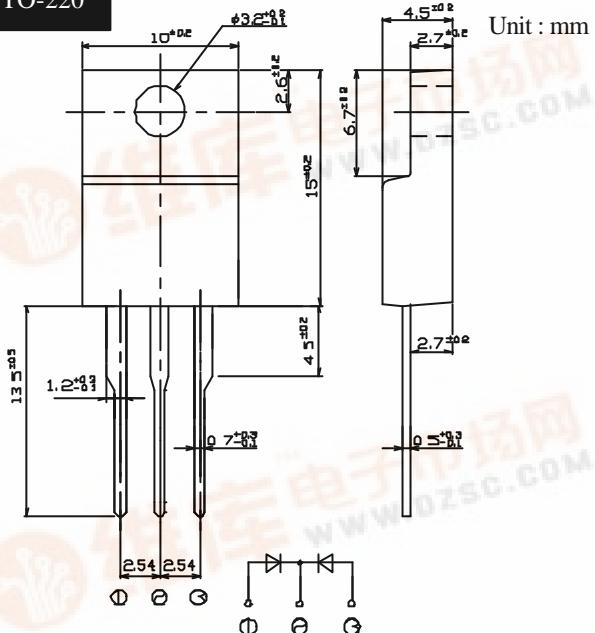

### RATINGS


Absolute Maximum Ratings (If not specified T<sub>c</sub>=25 )

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T <sub>stg</sub>		-55 ~ 150	
Operating Junction Temperature	T <sub>j</sub>		150	
Maximum Reverse Voltage	V <sub>RM</sub>		30	V
Repetitive Peak Surge Reverse Voltage	V <sub>RRSM</sub>	Pulse width 0.5ms, duty 1/40	35	V
Average Rectified Forward Current	I <sub>o</sub>	50Hz sine wave, R-load, Rating for each diode I <sub>o</sub> /2, T <sub>c</sub> =111	30	A
Peak Surge Forward Current	I <sub>FSM</sub>	50Hz sine wave, Non-repetitive 1 cycle peak value, T <sub>j</sub> =25	350	A
Repetitive Peak Surge Reverse Power	P <sub>RRSM</sub>	Pulse width 10 μ s, Rating of per diode, T <sub>j</sub> =25	1000	W
Dielectric Strength	V <sub>dis</sub>	Terminals to case, AC 1 minute	2	kV
Mounting Torque	T <sub>OR</sub>	(Recommended torque 0.3N·m)	0.5	N·m


Electrical Characteristics (If not specified T<sub>c</sub>=25 )

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =12.5A, Pulse measurement, Rating of per diode	Max.0.45	V
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =V <sub>RM</sub> , Pulse measurement, Rating of per diode	Max.15	mA
Junction Capacitance	C <sub>j</sub>	f=1MHz, V <sub>R</sub> =10V, Rating of per diode	Typ.960	pF
Thermal Resistance	j <sub>C</sub>	junction to case	Max.2.0	/W


## SF30SC3L Forward Voltage

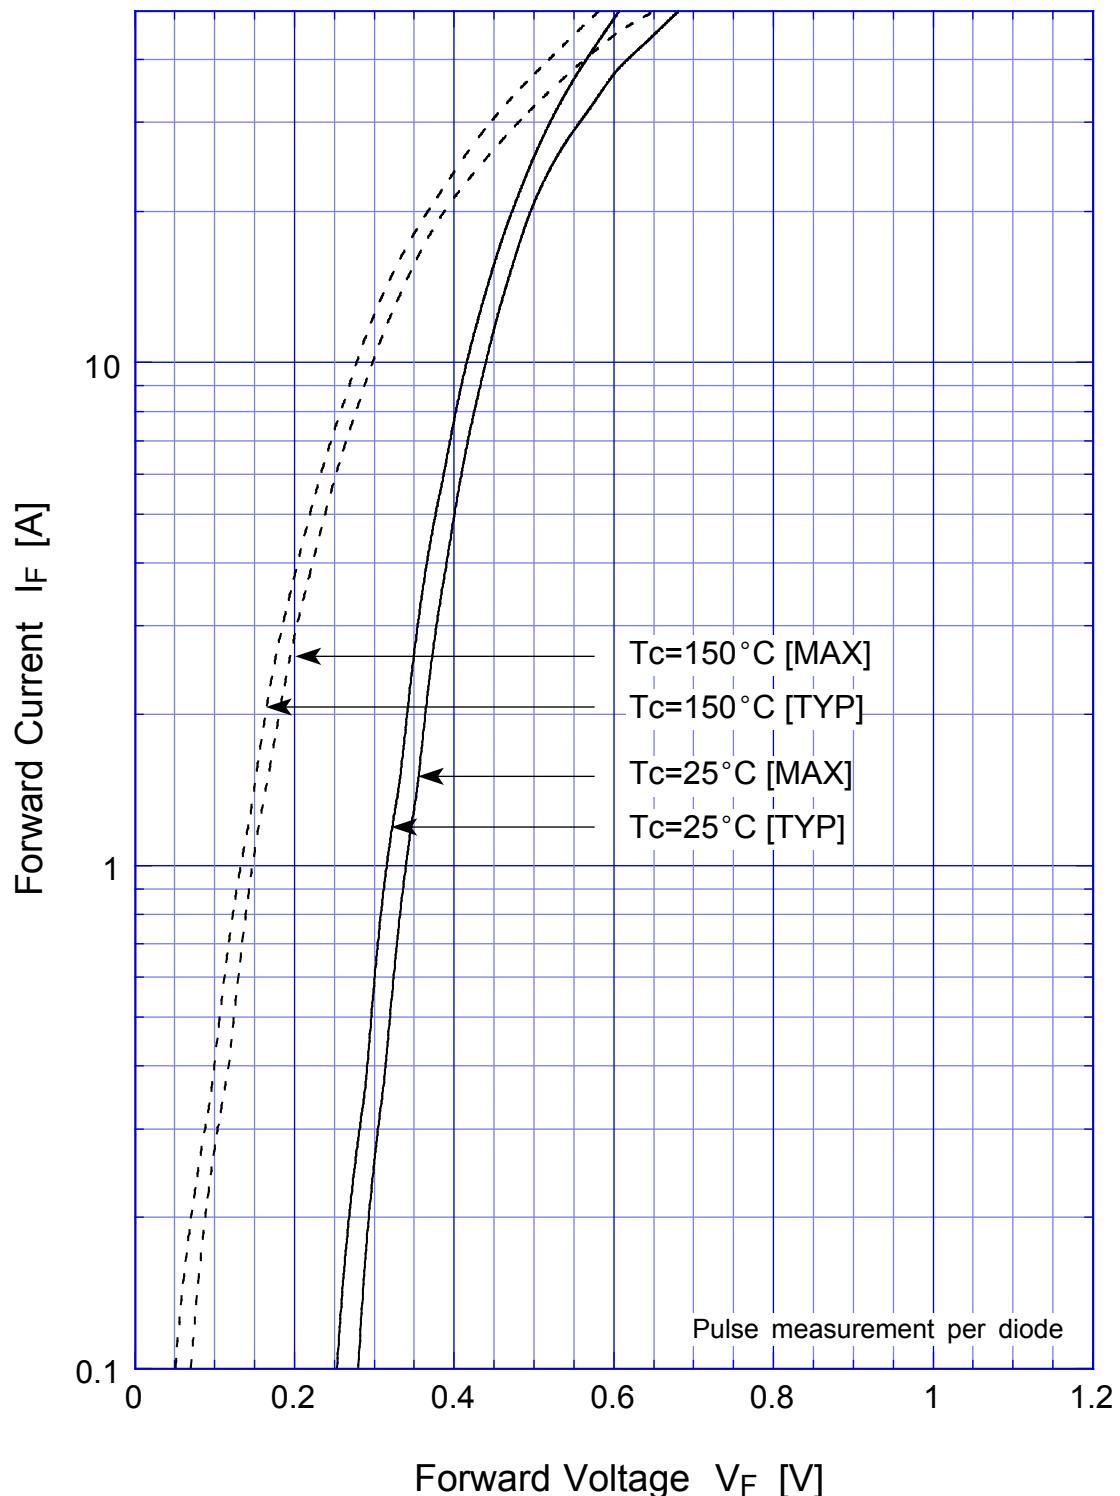



# SF30SC3L Junction Capacitance

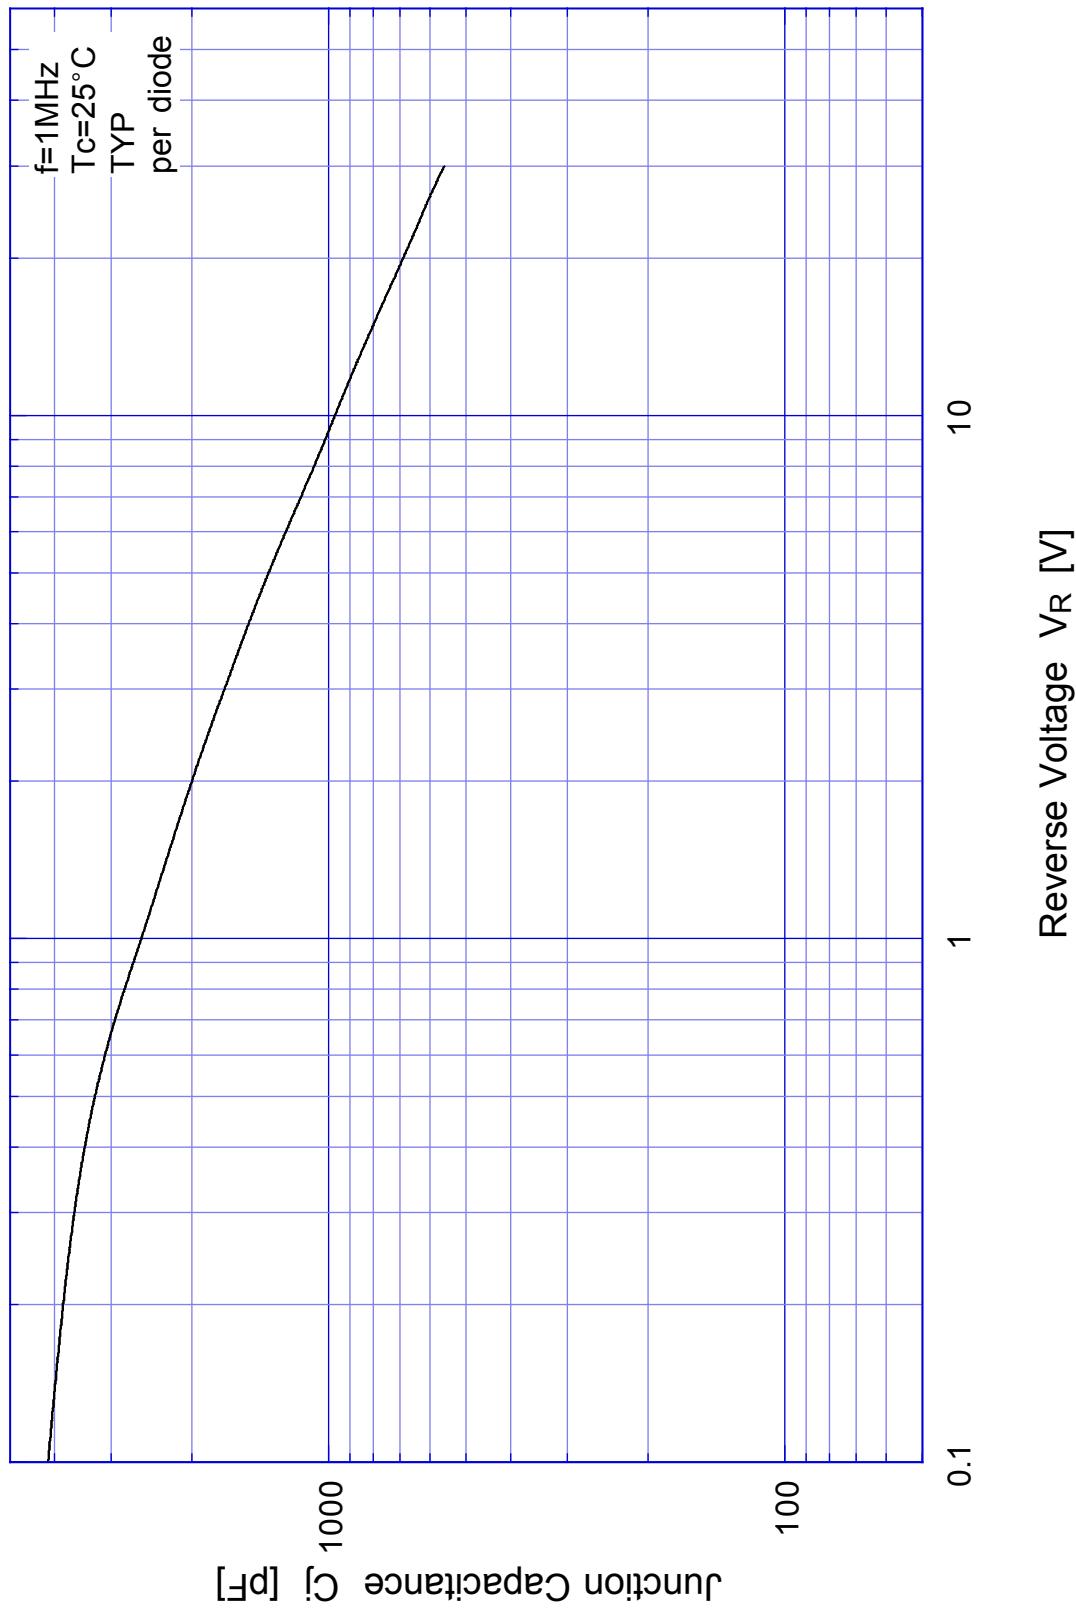



## SF30SC3L Reverse Current


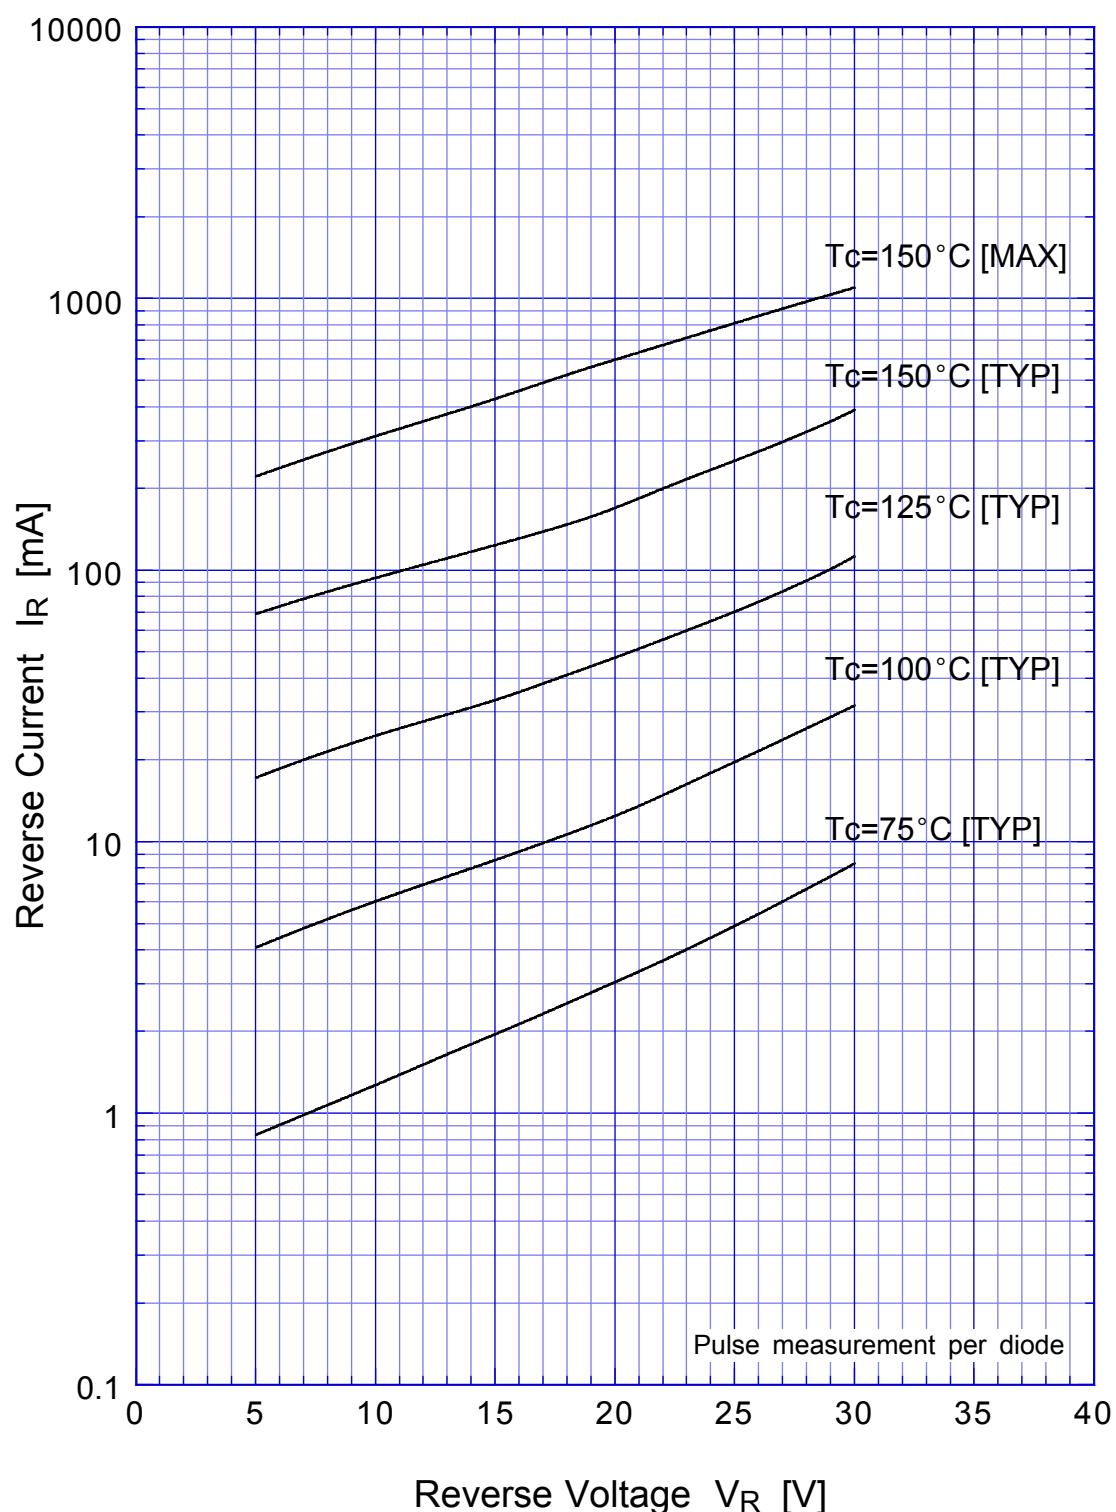


## SF30SC3L Reverse Power Dissipation

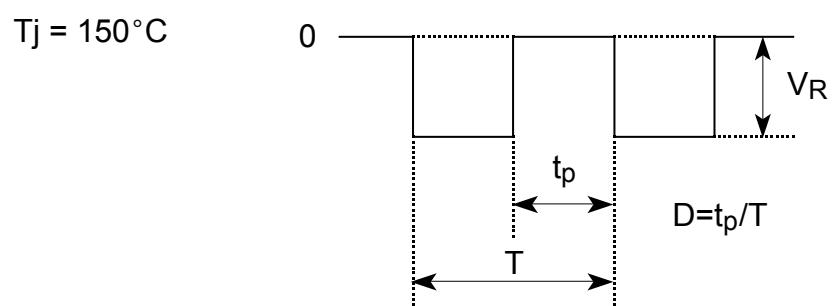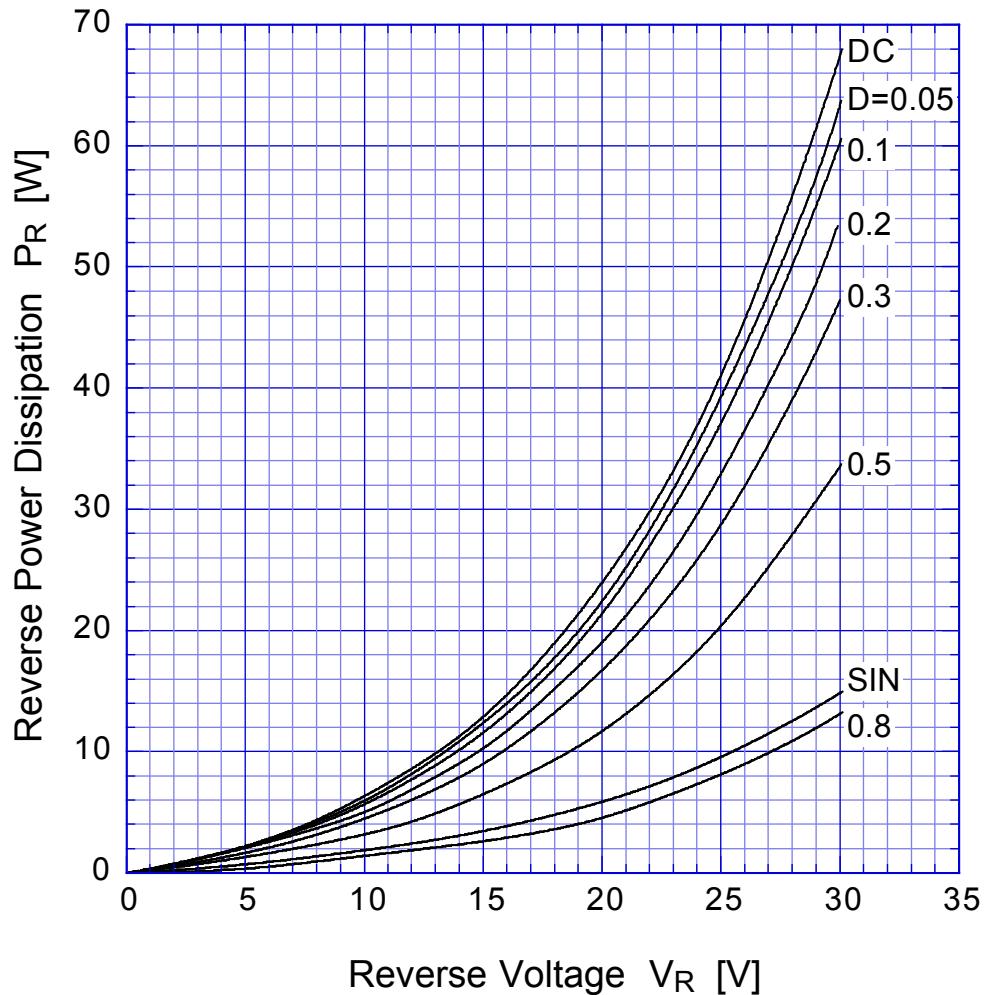


## SF30SC3L Forward Power Dissipation

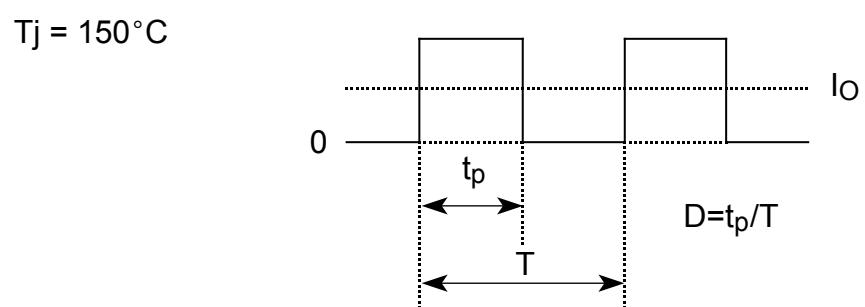
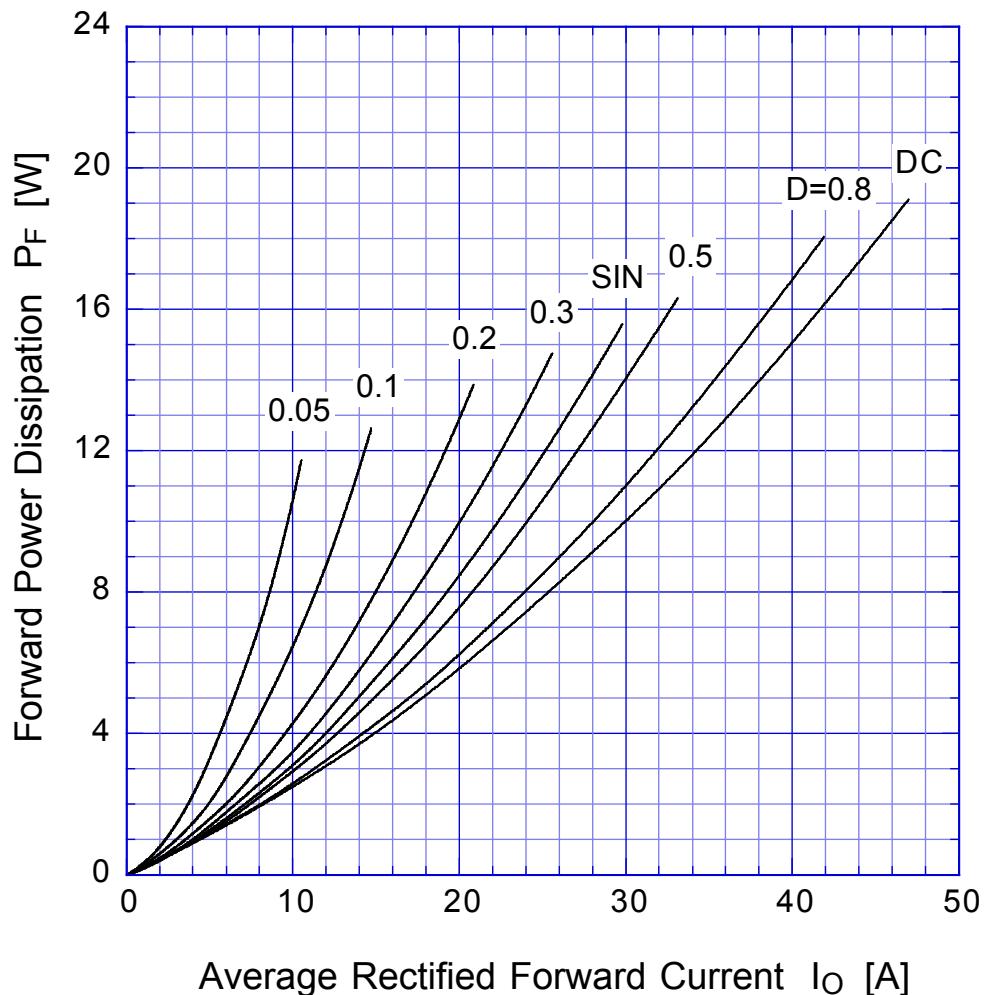


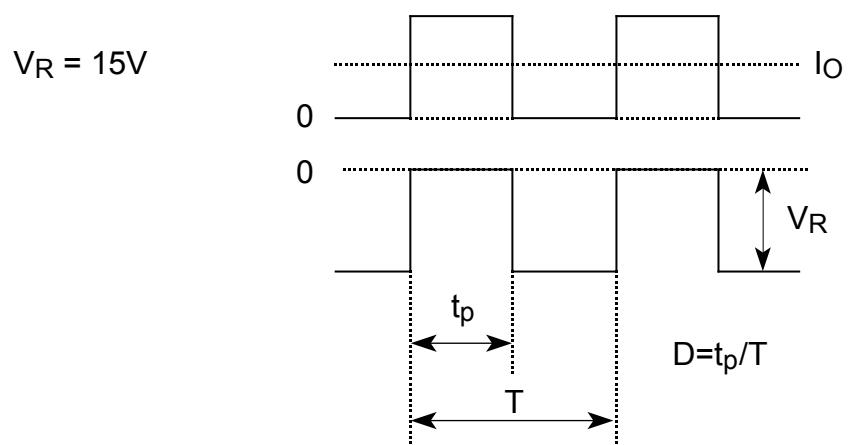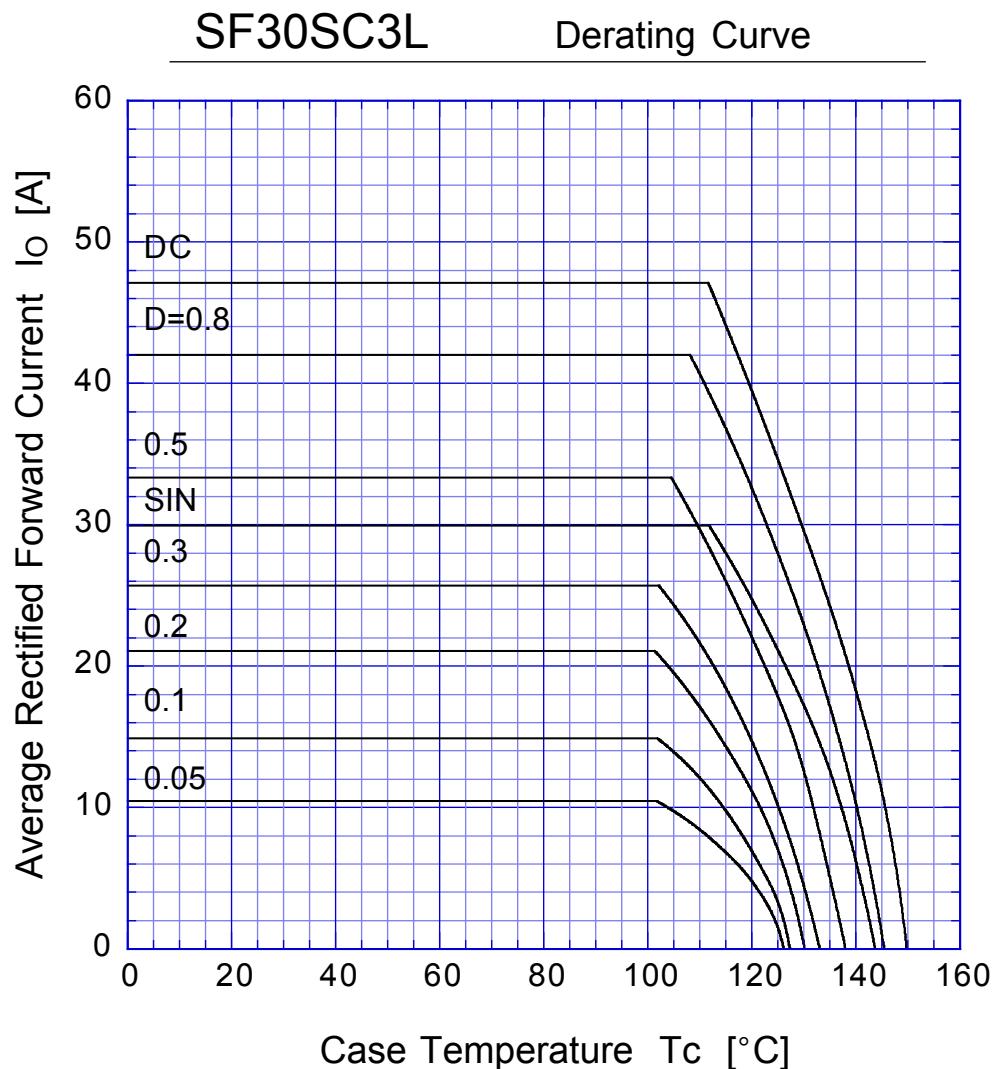

## SF30SC3L Peak Surge Forward Capability

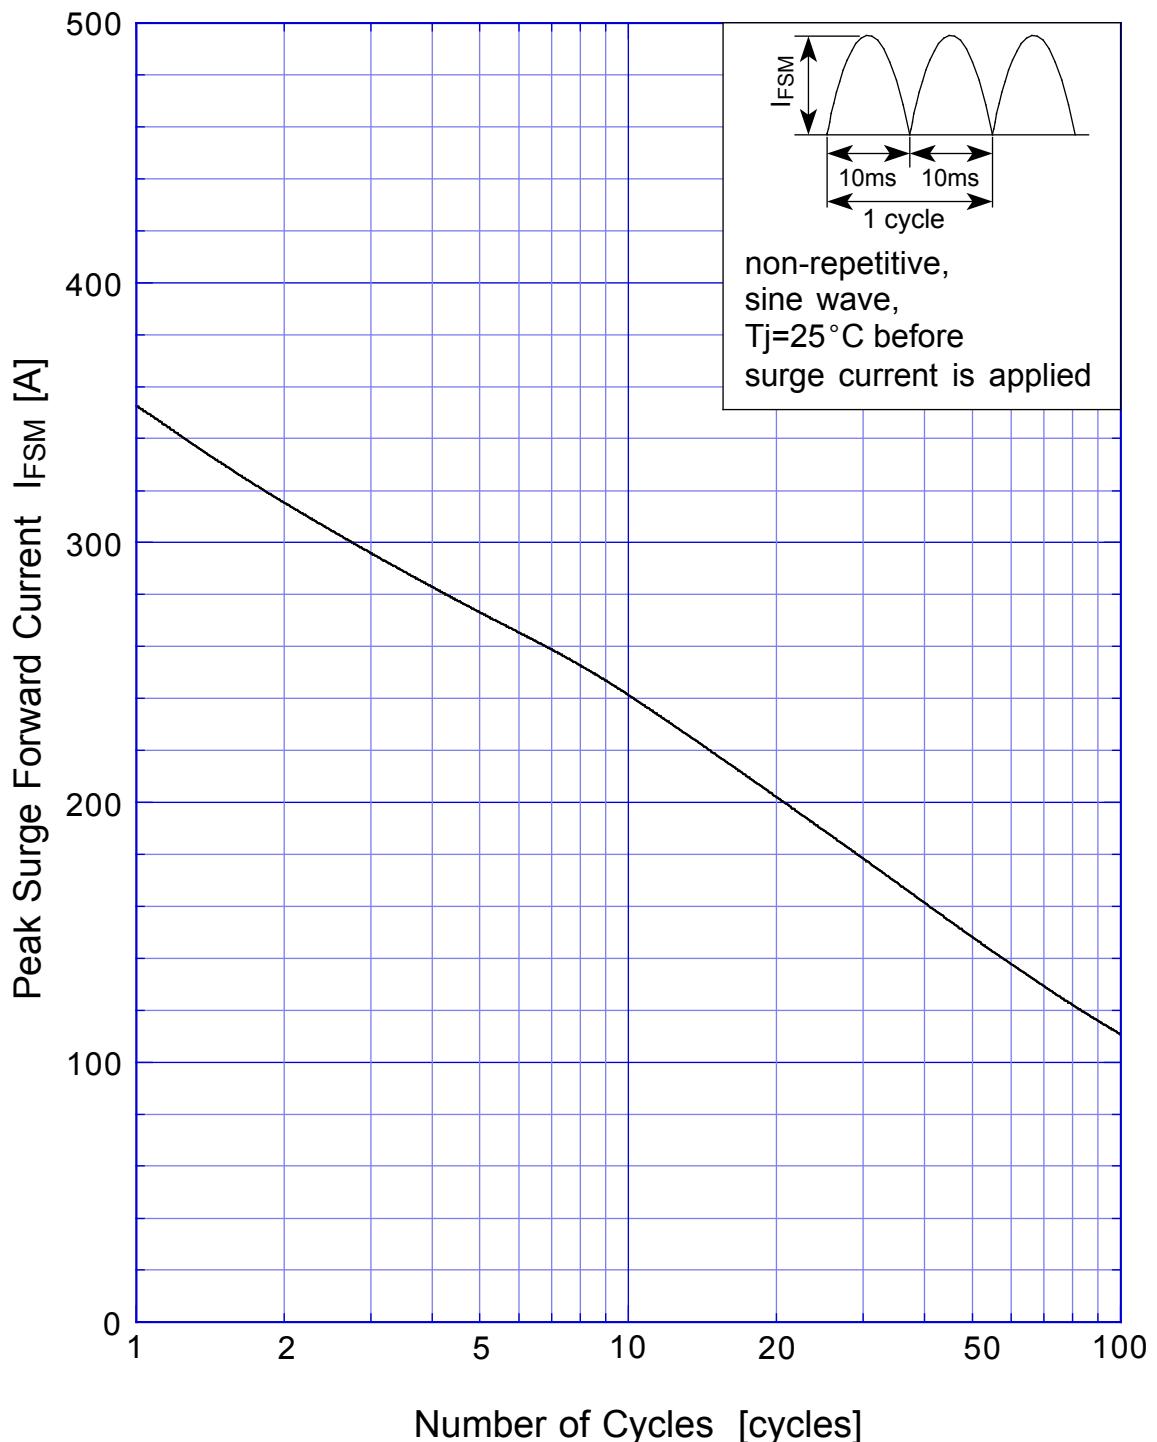

## SBD Repetitive Surge Reverse Power Derating Curve

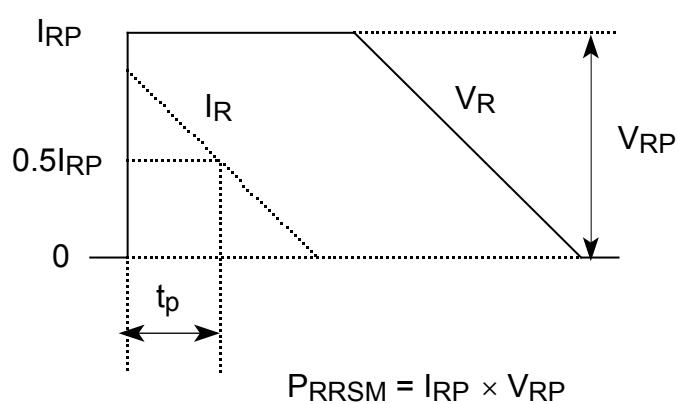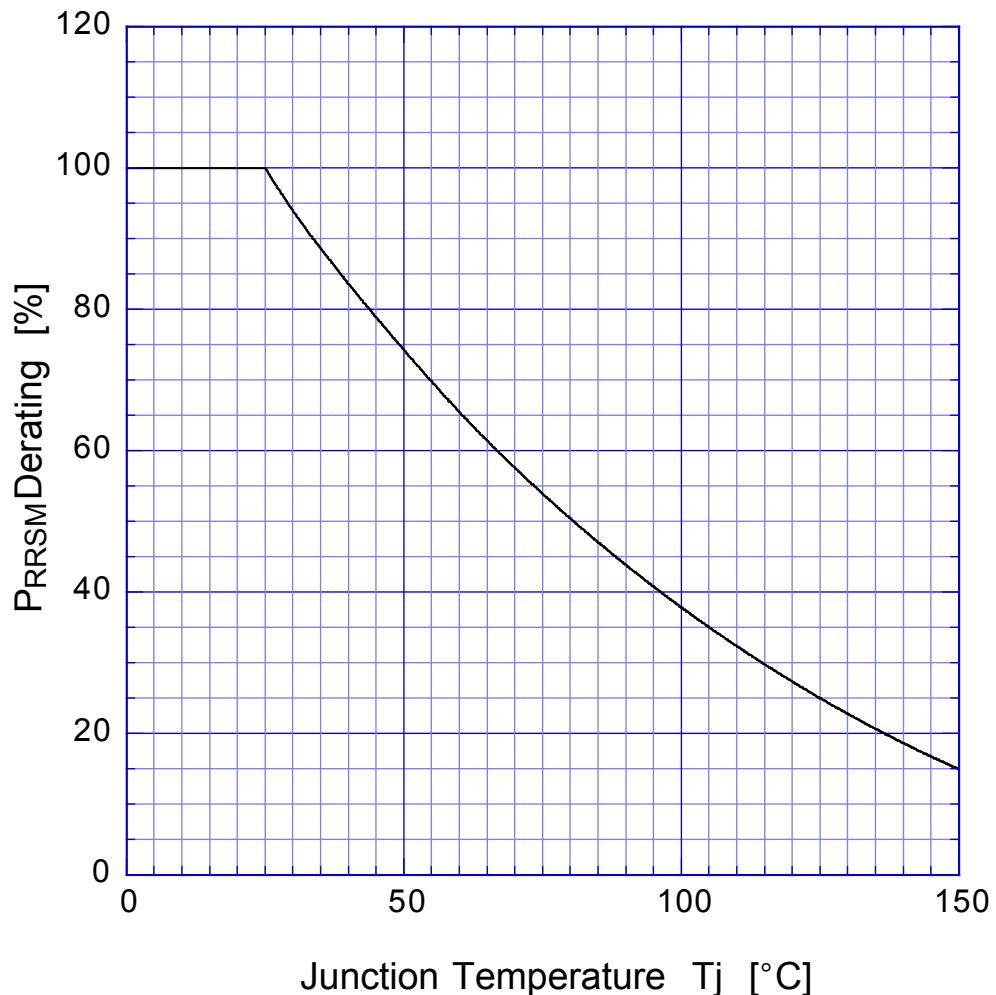

## SBD      Repetitive Surge Reverse Power Capability

