

GLASS PASSIVATED SUPER FAST RECTIFIER
VOLTAGE RANGE 50 to 400 Volts CURRENT 8.0 Amperes

FEATURES


- * Low switching noise
- * Low forward voltage drop
- * Low thermal resistance
- * High current capability
- * Super fast switching speed
- * High reliability
- * Good for switching mode circuit

MECHANICAL DATA

- * Case: D2PAK molded plastic
- * Epoxy: Device has UL flammability classification 94V-0
- * Lead: MIL-STD-202E method 208C guaranteed
- * Mounting position: Any
- * Weight: 2.2 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

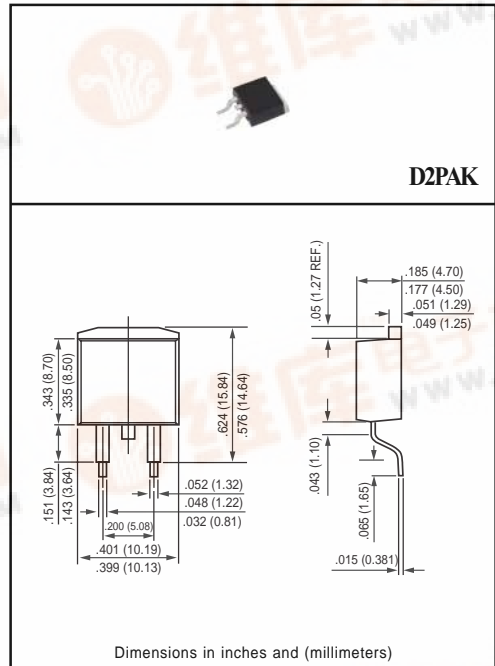

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

RATINGS	SYMBOL	SF81S	SF82S	SF83S	SF84S	SF85S	SF86S	UNITS
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	150	200	300	400	Volts
Maximum RMS Voltage	VRMS	35	70	105	140	210	280	Volts
Maximum DC Blocking Voltage	VDC	50	100	150	200	300	400	Volts
Maximum Average Forward Rectified Current at Tc = 100°C	IO	8.0						Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	IFSM	125						Amps
Typical Thermal Resistance	RθJC	3						°C/W
Typical Junction Capacitance (Note 2)	CJ	50				30		pF
Operating and Storage Temperature Range	TJ, TSTG	-65 to +150						°C

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

CHARACTERISTICS	SYMBOL	SF81S	SF82S	SF83S	SF84S	SF85S	SF86S	UNITS
Maximum Instantaneous Forward Voltage at 8.0A DC	VF	1.0				1.35		Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage	IR	10						uAmps
		500						
Maximum Reverse Recovery Time (Note 1)	trr	35			50			nSec

NOTES: 1. Test Conditions: IF = 0.5A, IR = -1.0A, IRR = -0.25A
2. Measured at 1 MHz and applied reverse voltage of 4.0 volts.
3. 0.4µs at 10V for Diode Reverse Recovery Time

RATING AND CHARACTERISTIC CURVES (SF81S THRU SF86S)

