



# SFF2004G THRU SFF2005G

Isolation 20.0 AMPS. Glass Passivated Super Fast Rectifiers



Voltage Range  
200 to 300 Volts  
Current  
20.0 Amperes


## Features

- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ High reliability
- ◇ High surge current capability

## Mechanical Data

- ◇ Cases: ITO-220AB Molded plastic
- ◇ Epoxy: UL 94V-0 rate flame retardant
- ◇ Terminals: Leads solderable per MIL-STD-202, Method 208 guaranteed
- ◇ Polarity: As marked
- ◇ High temperature soldering guaranteed: 260°C/10 seconds .16", (4.06mm) from case.
- ◇ Weight: 2.24 grams

### ITO-220AB

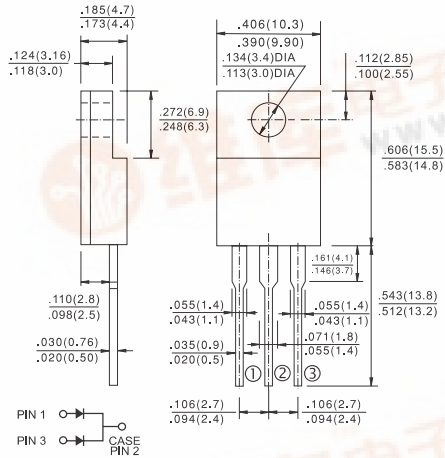

Dimensions in inches and (millimeters)

## Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%

Type Number	Symbol	SFF2004G	SFF2005G	Units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	200	300	V
Maximum RMS Voltage	$V_{RMS}$	140	210	V
Maximum DC Blocking Voltage	$V_{DC}$	200	300	V
Maximum Average Forward Rectified Current @ $T_C = 100^\circ C$	$I_{(AV)}$	20.0		A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	180		A
Maximum Instantaneous Forward Voltage @ 10.0A	$V_F$	0.975	1.30	V
Maximum DC Reverse Current @ $T_A=25^\circ C$ at Rated DC Blocking Voltage @ $T_A=100^\circ C$	$I_R$	10	400	$\mu A$ $\mu A$
Maximum Reverse Recovery Time (Note 1)	$T_{rr}$	35		nS
Typical Junction Capacitance (Note 2)	$C_j$	90		pF
Typical Thermal Resistance (Note 3)	$R_{\theta JC}$	2.5		$^\circ C/W$
Operating Temperature Range	$T_J$	-65 to +150		$^\circ C$
Storage Temperature Range	$T_{STG}$	-65 to +150		$^\circ C$

Notes: 1. Reverse Recovery Test Conditions:  $I_F=0.5A$ ,  $I_R=1.0A$ ,  $I_{RR}=0.25A$   
2. Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.  
3. Thermal Resistance from Junction to Case Mounted on Heatsink.



## RATINGS AND CHARACTERISTIC CURVES (SFF2004G THRU SFF2005G)

FIG. 1- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM


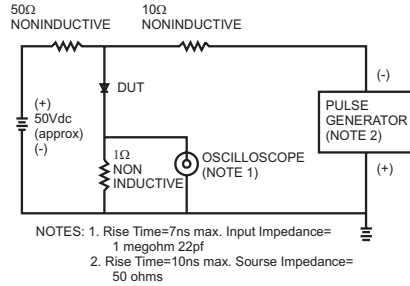


FIG. 2- MAXIMUM FORWARD CURRENT DERATING CURVE

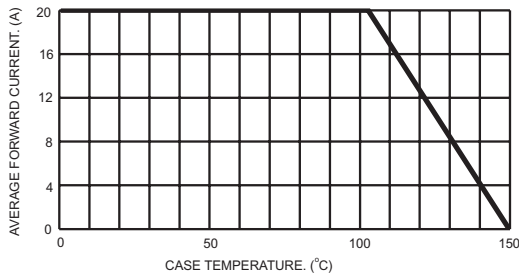


FIG. 3- TYPICAL REVERSE CHARACTERISTICS

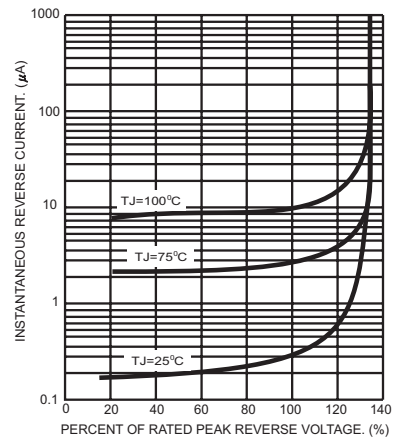


FIG. 4- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

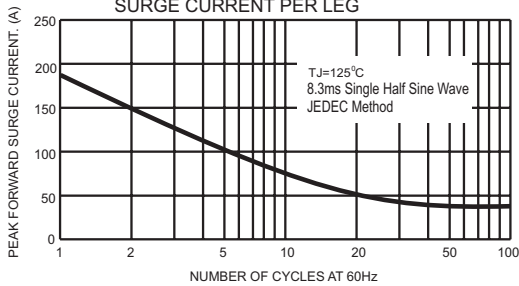


FIG. 6- TYPICAL FORWARD CHARACTERISTICS PER LEG

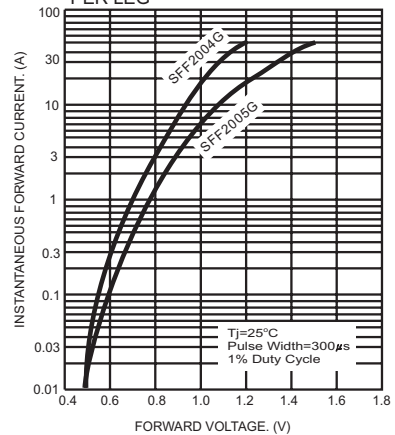


FIG. 5- TYPICAL JUNCTION CAPACITANCE PER LEG

