
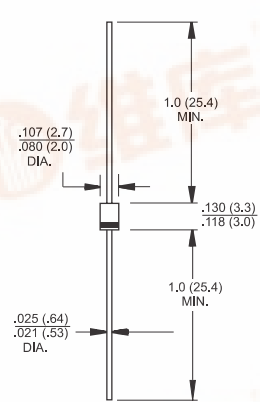
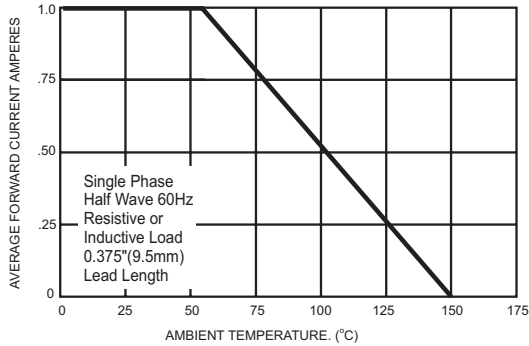
	<h1>SFR1T1 THRU SFR1T7</h1> <h2>1.0 AMP. Soft Fast Recovery Rectifiers</h2>								
	Voltage Range 50 to 1000 Volts Current 1.0 Ampere								
<h3>Features</h3> <ul style="list-style-type: none"> <li>✦ Low forward voltage drop</li> <li>✦ High current capability</li> <li>✦ High reliability</li> <li>✦ High surge current capability</li> <li>✦ Fast switching for high efficiency</li> </ul> <h3>Mechanical Data</h3> <ul style="list-style-type: none"> <li>✦ Cases: Molded plastic</li> <li>✦ Epoxy: UL 94V-0 rate flame retardant</li> <li>✦ Lead: Axial leads, solderable per MIL-STD-202, Method 208 guaranteed</li> <li>✦ Polarity: Color band denotes cathode end</li> <li>✦ High temperature soldering guaranteed: 260°C/10 seconds/.375", (9.5mm) lead lengths at 5 lbs., (2.3kg) tension</li> <li>✦ Weight: 0.20 gram</li> </ul>	<h3>TS-1</h3>  <p style="text-align: center;">Dimensions in inches and (millimeters)</p>								
<h3>Maximum Ratings and Electrical Characteristics</h3> <p>Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%</p>									
Type Number	Symbol	SFR 1T1	SFR 1T2	SFR 1T3	SFR 1T4	SFR 1T5	SFR 1T6	SFR 1T7	Units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current .375" (9.5mm) Lead Length @ $T_A = 55^\circ\text{C}$	$I_{(AV)}$	1.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	30							A
Maximum Instantaneous Forward Voltage @ 1.0A	$V_F$	1.2							V
Maximum DC Reverse Current @ $T_A = 25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A = 100^\circ\text{C}$	$I_R$	5.0 100							$\mu\text{A}$ $\mu\text{A}$
Maximum Reverse Recovery Time ( Note 1 )	$T_{rr}$	120			200		350		nS
Typical Junction Capacitance ( Note 2 )	$C_j$	10							pF
Typical Thermal Resistance ( Note 3 )	$R_{\theta JA}$	90							$^\circ\text{C/W}$
Operating Temperature Range	$T_J$	-65 to +150							$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-65 to +150							$^\circ\text{C}$

Notes: 1. Reverse Recovery Test Conditions:  $I_F = 0.5\text{A}$ ,  $I_R = 1.0\text{A}$ ,  $I_{RR} = 0.25\text{A}$   
 2. Measured at 1 MHz and Applied Reverse Voltage of 4.0 Volts D.C.  
 3. Mount on Cu-Pad Size 5mm x 5mm on P.C.B.




## RATINGS AND CHARACTERISTIC CURVES (SFR1T1 THRU SFR1T7)


**FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE**




**FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT**

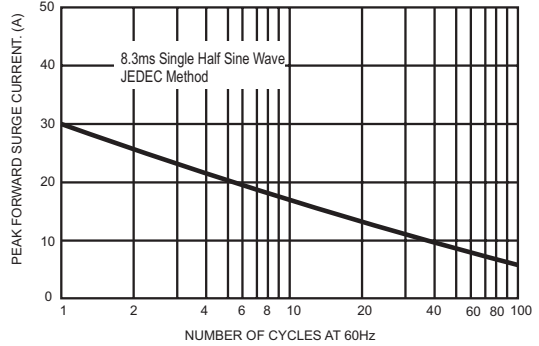

**FIG.3- TYPICAL FORWARD CHARACTERISTICS**

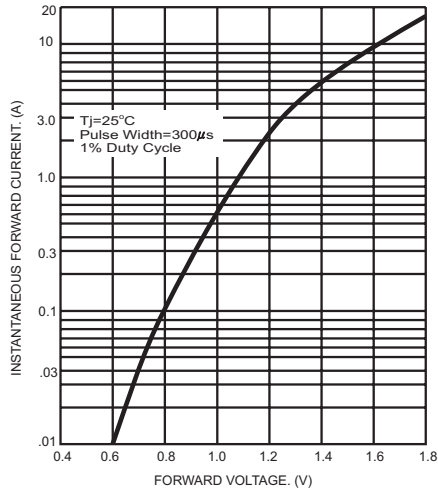

**FIG.4- TYPICAL JUNCTION CAPACITANCE**

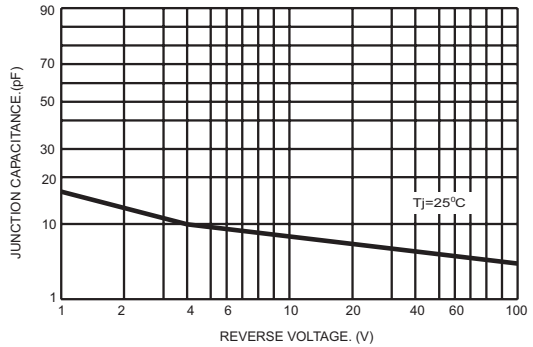

**FIG.5- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM**

