


SGL 34-20...SGL 34-100



Surface mount diode

Schottky barrier rectifiers diodes

SGL 34-20...SGL 34-100

Forward Current: 0,5 A

Reverse Voltage: 20 to 100 V

Features

- Max. solder temperature: 260°C
- Plastic material has UL classification 94V-0
- One gray ring denotes "cathode" and "Schottky-Rectifier"
- The type numbers are noted only on the label on the reel

Mechanical Data

- Plastic case MiniMelf / DO-213AA / SOD 80
- Weight approx.: 0,04 g
- Terminals: plated terminals solderable per MIL-STD-750
- Mounting position: any
- Standard packaging: 2500 pieces per reel

- Max. temperature of the terminals $T_T = 100^\circ\text{C}$
- $I_F = 0,5\text{ A}$, $T_j = 25^\circ\text{C}$
- $T_A = 25^\circ\text{C}$
- Mounted on P.C. board with 25 mm² copper pads at each terminal

Type	Polarity color band	Repetitive peak reverse voltage V_{RRM} V	Surge peak reverse voltage V_{RSM} V	Maximum forward voltage $T_j = 25^\circ\text{C}$ $I_F = 0,5\text{ A}$ $V_F^{2)}$ V	Maximum reverse recovery time $I_F = -\text{A}$ $I_R = -\text{A}$ $I_{RR} = -\text{A}$ t_{rr} ns
SGL 34-20	-	20	20	0,46	-
SGL 34-30	-	30	30	0,46	-
SGL 34-40	-	40	40	0,46	-
SGL 34-50	-	50	50	0,6	-
SGL 34-60	-	60	60	0,6	-
SGL 34-90	-	90	90	0,65	-
SGL 34-100	-	100	100	0,65	-

Absolute Maximum Ratings


 $T_c = 25^\circ\text{C}$, unless otherwise specified

Symbol	Conditions	Values	Units
I_{FAV}	Max. averaged fwd. current, R-load, $T_T = 75^\circ\text{C}$	0,5	A
I_{FRM}	Repetitive peak forward current $f > 15\text{ Hz}^1)$	6	A
I_{FSM}	Peak fwd. surge current 50 Hz half sinus-wave ³⁾	10	A
I^2t	Rating for fusing, $t < \text{ms}^3)$		A ² s
R_{thA}	Max. thermal resistance junction to ambient ⁴⁾	150	K/W
R_{thT}	Max. thermal resistance junction to terminals	70	K/W
T_j	Operating junction temperature	-50...+150	°C
T_s	Storage temperature	-50...+150	°C

Characteristics



 $T_c = 25^\circ\text{C}$, unless otherwise specified

Symbol	Conditions	Values	Units
I_R	Maximum leakage current, $T_j = 25^\circ\text{C}$; $V_R = V_{RRM}$ $T_j = 100^\circ\text{C}$; $V_R = V_{RRM}$	<0,5 <5,0	mA mA
C_j	Typical junction capacitance (at 1 MHz and applied reverse voltage of 6 V)	30	pF
Q_{rr}	Reverse recovery charge ($U_R = V$; $I_F = A$; $dI_F/dt = A/\text{ms}$)	-	μC
E_{RSM}	Non repetitive peak reverse avalanche energy ($I_R = \text{mA}$; $T_j = ^\circ\text{C}$; inductive load switched off)	-	mJ

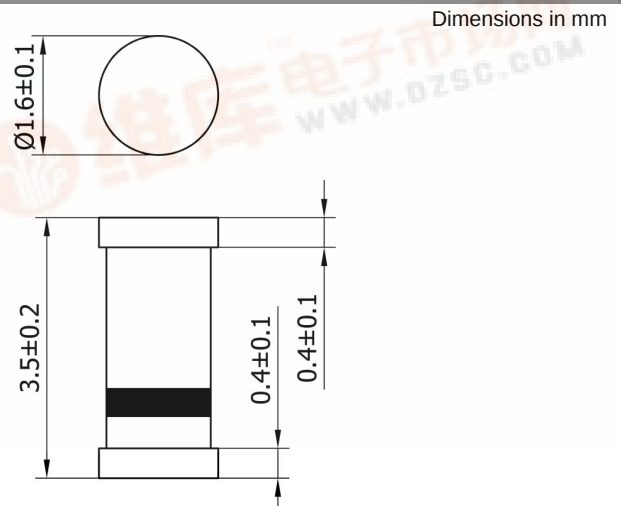

case: MiniMelf / DO-213AA

SGL 34-20...SGL 34-100

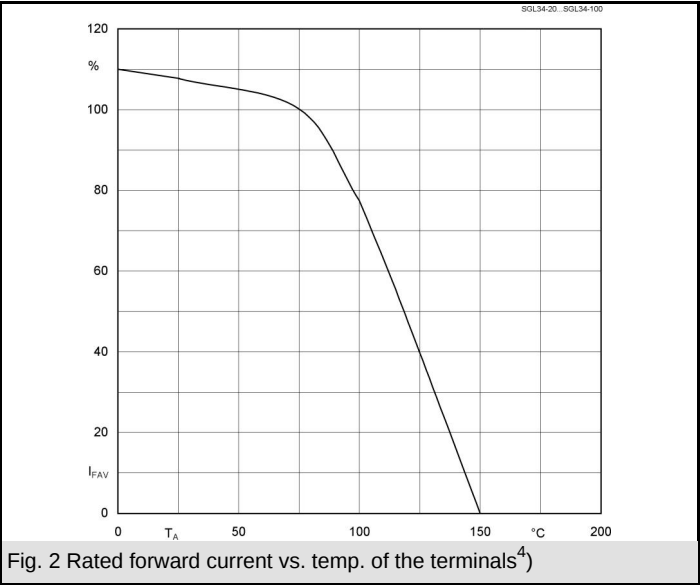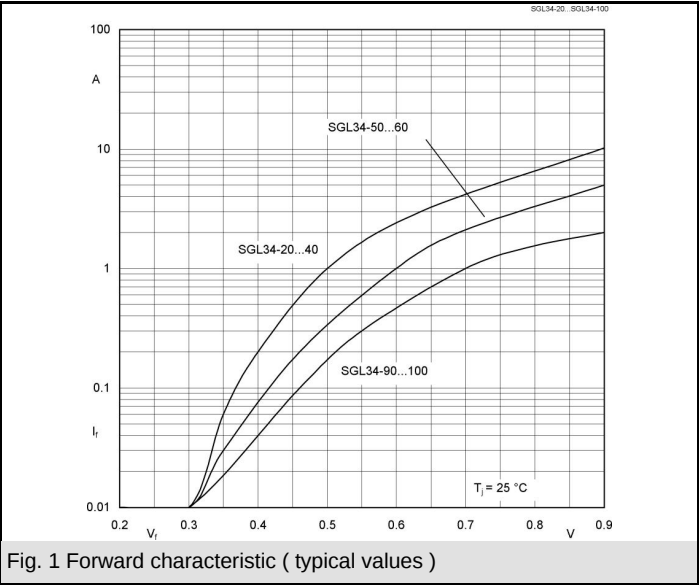

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com