

SONY

SGM2014M

GaAs N-channel Dual Gate MES FET

Description

The SGM2014M is an N-channel dual gate GaAs MES FET for UHF band low-noise amplification. This FET is suitable for a wide range of applications including TV tuners, cellular radios, and DBS IF amplifiers.

Features

- Low voltage operation
- Low noise: NF=1.5dB (typ.) at 900MHz
- High gain: Ga=18dB (typ.) at 900MHz
- Low cross-modulation
- High stability
- Built-in gate-protection diode
- Standard SOT-143 package

Application

UHF band amplifier, mixer and oscillator


Structure

GaAs N-channel dual-gate metal semiconductor field-effect transistor

Absolute Maximum Ratings (Ta=25°C)


- | | | | |
|-------------------------------|------------------|-------------|----|
| • Drain to source voltage | V _{DSX} | 12 | V |
| • Gate 1 to source voltage | V _{G1S} | -5 | V |
| • Gate 2 to source voltage | V _{G2S} | -5 | V |
| • Drain current | I _D | 55 | mA |
| • Channel temperature | T _{ch} | 150 | °C |
| • Storage temperature | T _{stg} | -55 to +150 | °C |
| • Allowable power dissipation | P _D | 150 | mW |

Marking



Package Outline

Unit : mm

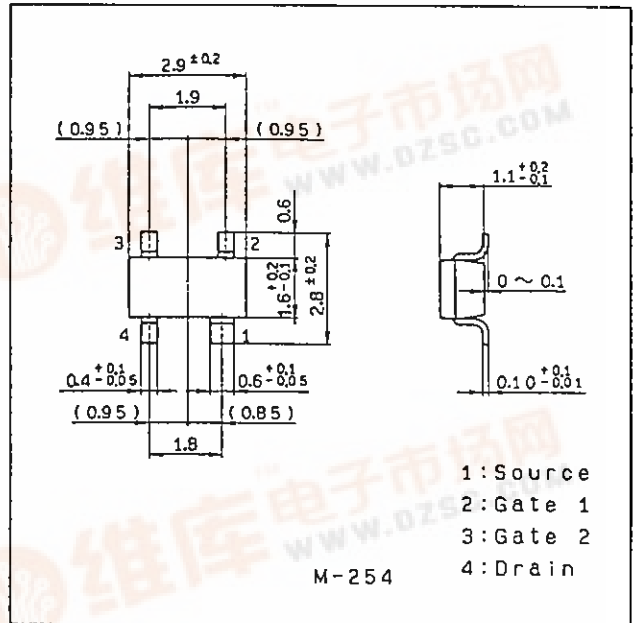

Sony reserves the right to change products and specifications without prior notice. This information does not convey any license by any implication or otherwise under any patents or other right. Application circuits shown, if any, are typical examples illustrating the operation of the devices. Sony cannot assume responsibility for any problems arising out of the use of these circuits.











Electrical Characteristics

(Ta=25°C)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Drain cut-off current	I _{DSX}	V _{DS} =12V V _{G1S} =-4V V _{G2S} =0V	50			μA
Gate 1 to source current	I _{G1SS}	V _{G1S} =-4.5V V _{G2S} =0V V _{DS} =0V			-8	μA
Gate 2 to source current	I _{G2SS}	V _{G2S} =-4.5V V _{G1S} =0V V _{DS} =0V			-8	μA
Drain saturation current	I _{DSS}	V _{DS} =5V V _{G1S} =0V V _{G2S} =0V	8		28	mA
Gate 1 to source cut-off voltage	V _{G1S} (OFF)	V _{DS} =5V I _D =100 μA V _{G2S} =0V			-2.5	V
Gate 2 to source cut-off voltage	V _{G2S} (OFF)	V _{DS} =5V I _D =100 μA V _{G1S} =0V			-2.5	V
Forward transfer admittance	g _m	V _{DS} =5V I _D =10mA V _{G2S} =1.5V f=1kHz	13	17		mS
Input capacitance	C _{iss}	V _{DS} =5V I _D =10mA V _{G2S} =1.5V		0.9	2	pF
Feedback capacitance	C _{rss}	f=1MHz		25	50	fF
Noise figure	NF	V _{DS} =5V I _D =10mA V _{G2S} =1.5V		1.5	2.5	dB
Associated gain	G _a	f=900MHz	15	18		dB


Typical Characteristics (Ta=25°C)

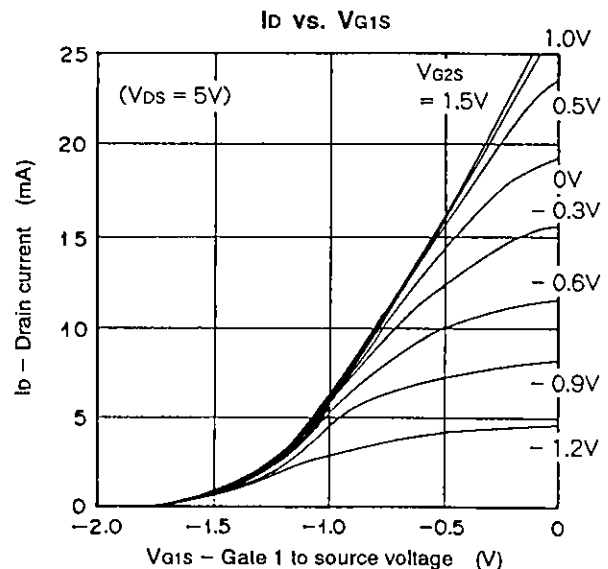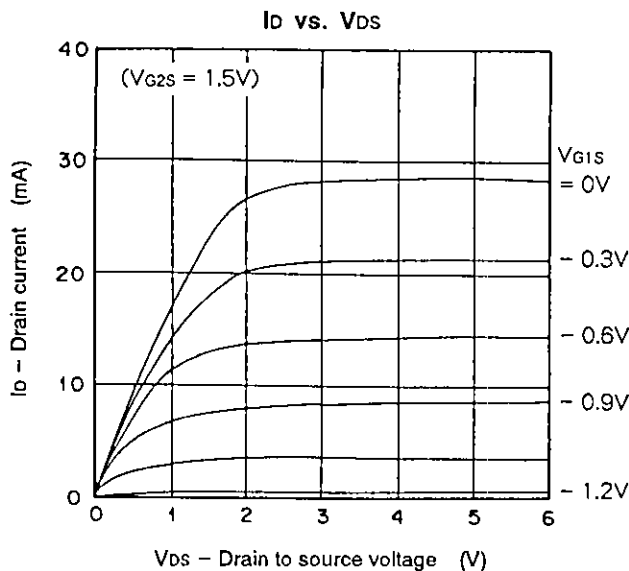

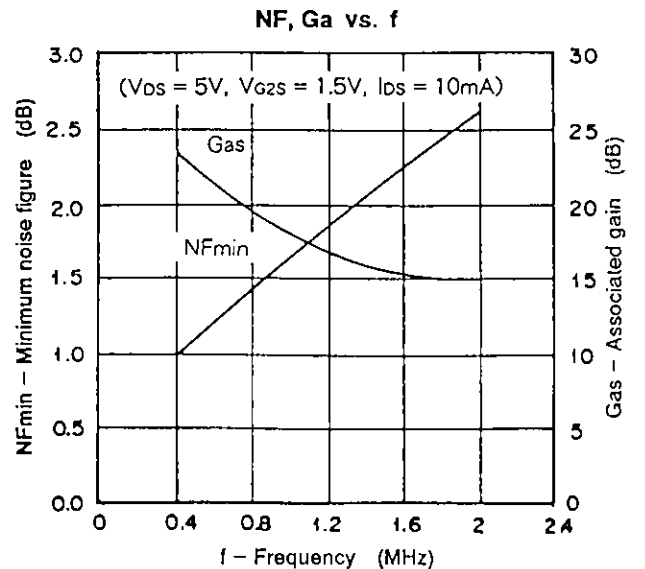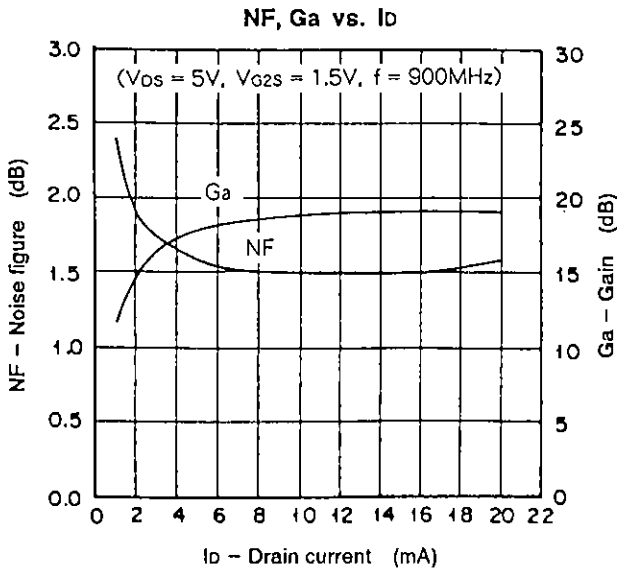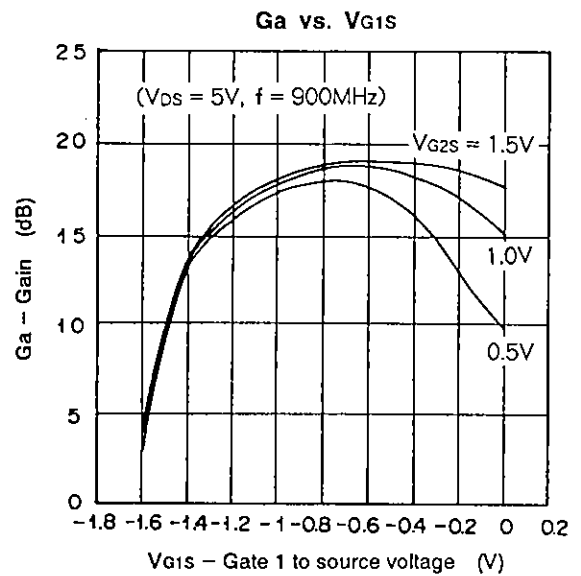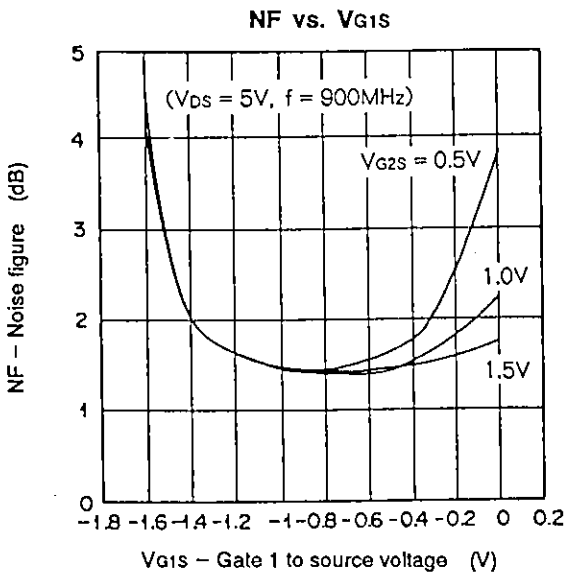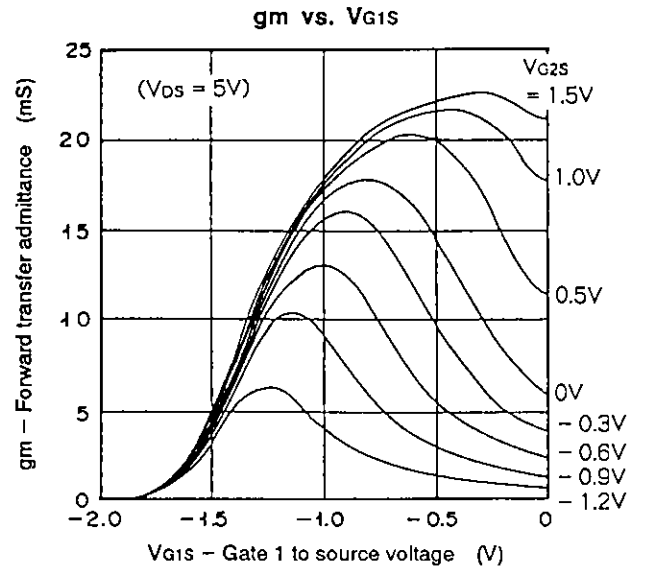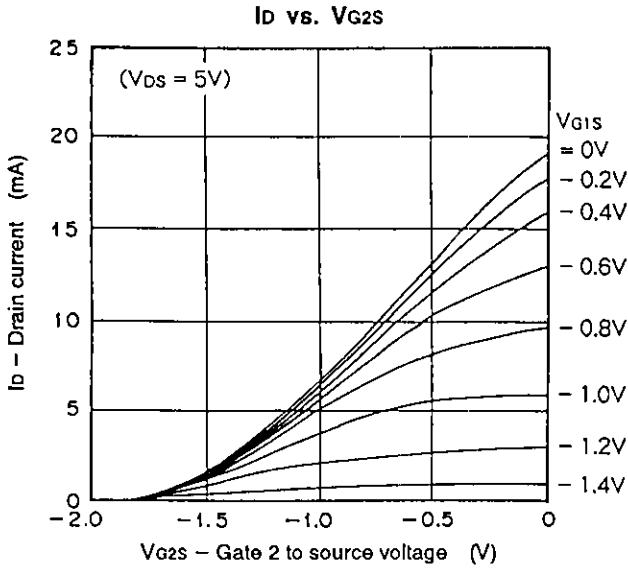



Noise Figure Characteristics ($V_{DS}=5V, V_{G2S}=1.5V, I_D=10mA$)

at 900MHz

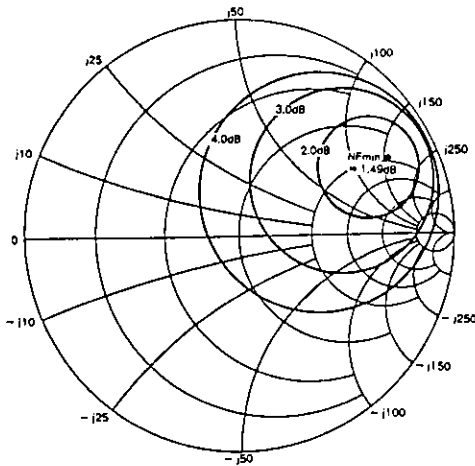

f (MHz)	Ga (dB)	NFmin (dB)	NF50 (dB)	Rn (Ω)	Γ (S)	
					MAG	ANG
600	21.2	1.18	3.32	53.4	0.83	15.7°
700	20.3	1.28	3.31	52.7	0.81	18.1°
800	19.4	1.38	3.30	52.0	0.78	20.4°
900	18.7	1.49	3.30	51.2	0.76	22.7°
1000	18.0	1.59	3.30	50.5	0.74	25.0°

S-parameters vs. Frequency Characteristics ($V_{DS}=5V, V_{G2S}=1.5V, I_D=10mA$)

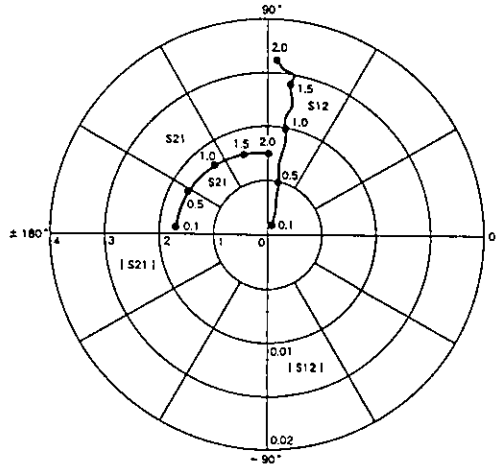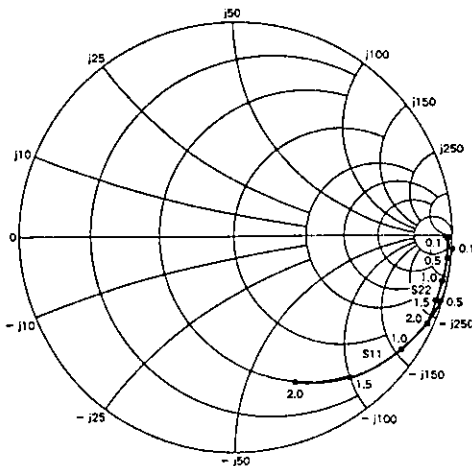

f (MHz)	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100	1.000	-3.4°	1.706	175.5°	.001	71.9°	.979	-1.2°
200	1.000	-6.8°	1.709	170.3°	.002	88.6°	.979	-2.5°
300	.996	-10.4°	1.695	165.7°	.003	75.7°	.978	-3.7°
400	.998	-13.8°	1.702	161.1°	.004	86.4°	.979	-4.9°
500	.987	-17.3°	1.691	156.1°	.005	79.1°	.980	-6.1°
600	.977	-20.8°	1.686	151.4°	.006	81.1°	.978	-7.4°
700	.967	-24.2°	1.678	146.8°	.007	81.8°	.975	-8.5°
800	.953	-27.6°	1.664	141.9°	.008	80.2°	.974	-9.8°
900	.936	-30.9°	1.654	137.6°	.009	79.8°	.971	-11.0°
1000	.923	-34.5°	1.643	132.9°	.010	80.6°	.971	-12.3°
1100	.906	-37.9°	1.622	127.9°	.011	80.9°	.968	-13.8°
1200	.891	-41.2°	1.619	123.8°	.011	82.5°	.972	-14.5°
1300	.872	-44.6°	1.607	119.4°	.012	79.4°	.971	-15.6°
1400	.855	-48.0°	1.596	114.9°	.013	79.7°	.971	-16.9°
1500	.834	-51.1°	1.583	110.4°	.014	81.6°	.971	-18.1°
1600	.814	-54.5°	1.567	106.0°	.013	81.4°	.967	-19.2°
1700	.792	-57.6°	1.556	101.6°	.014	80.0°	.967	-20.3°
1800	.771	-60.8°	1.541	97.2°	.015	80.1°	.966	-21.6°
1900	.752	-64.0°	1.528	93.1°	.015	82.3°	.966	-22.9°
2000	.731	-67.3°	1.517	88.7°	.016	87.6°	.968	-24.1°