


SHC1027 -- Straight Male Cord Connectors



Machined Aluminum

Product Specifications

Version	Accessories
Accessory Item	Straight Male Cord Connectors
NPT Size	1/2" NPT
Cord Crip Cable Range	.63" - .75"
Material	Machined Aluminum
Ingress Protection	IP66
Operating Temperature	-40° F to 300° F (-40° C to 149° C)
Hazardous Locations	Hubbell cord connectors are suitable for use in hazardous locations per Class I Div. 2, Class II Div. 1 & 2, Class III Div. 1 & 2 in accordance with the NEC.
Certifications	UL Listed in Accordance with Standard 514B, CSA Certified, United States Coast Guard Approved, Title 46-Part 111
M Drawings	Click here for M-Drawing
Brochures	Click here for product brochure
Catalog Page	Click here for catalog page G74
Hubbellnet	Click here for Hubbellnet
Catalog Section	Click here for Section-G
UPC Number	78358520027
Weight in LBs	0.15

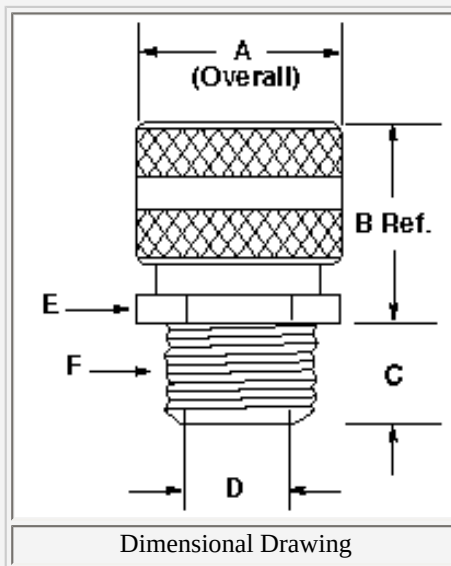

Hubbell Incorporated (Delaware)
185 Plains Road
Milford, CT 06460-2420
Ph: (203) 882-4800
Fax: (800) 255-1031

