

P-Channel 12-V (D-S) MOSFET

PRODUCT SUMMARY



V_{DS} (V)	$r_{DS(on)}$ (Ω)	I_D (A)
-12	0.040 @ $V_{GS} = -4.5$ V	-6.0
	0.053 @ $V_{GS} = -2.5$ V	-5.2
	0.072 @ $V_{GS} = -1.8$ V	-4.5

FEATURES

- TrenchFET® Power MOSFET: 1.8-V Rated
- Ultra Low On-Resistance

APPLICATIONS

- Load Switch
- PA Switch

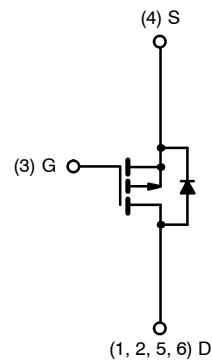

P-Channel MOSFET

Ordering Information: Si3447BDV-T1
Si3447BDV-T1—E3 (Lead Free)

Marking Code: B7xxx

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

Parameter		Symbol	5 secs	Steady State	Unit
Drain-Source Voltage		V _{DS}	−12		V
Gate-Source Voltage		V _{GS}	± 8		
Continuous Drain Current (T _J = 150°C) ^a	T _A = 25°C	I _D	−6.0	−4.5	A
	T _A = 85°C		−4.3	−3.3	
Pulsed Drain Current		I _{DM}	−20		
Continuous Diode Current (Diode Conduction) ^a		I _S	−1.7	−0.9	
Maximum Power Dissipation ^a	T _A = 25°C	P _D	2.0	1.1	W
	T _A = 85°C		1.0	0.6	
Operating Junction and Storage Temperature Range		T _J , T _{stg}	−55 to 150		°C

THERMAL RESISTANCE RATINGS

Parameter		Symbol	Typical	Maximum	Unit
Maximum Junction-to-Ambient ^a	$t \leq 5$ sec	R_{thJA}	50	62.5	$^\circ\text{C/W}$
	Steady State		90	110	
Maximum Junction-to-Foot (Drain)	Steady State	R_{thJF}	30	36	

Notes

a. Surface Mounted on 1" x 1" FR4 Board.



SPECIFICATIONS ($T_J = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = -250\ \mu\text{A}$	-0.45		1	V
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0\ \text{V}, V_{GS} = \pm 8\ \text{V}$			± 100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = -12\ \text{V}, V_{GS} = 0\ \text{V}$			-1	μA
		$V_{DS} = -12\ \text{V}, V_{GS} = 0\ \text{V}, T_J = 85^\circ\text{C}$			-5	
On-State Drain Current ^a	$I_{D(on)}$	$V_{DS} = -5\ \text{V}, V_{GS} = -4.5\ \text{V}$	-20			A
Drain-Source On-State Resistance ^a	$r_{DS(on)}$	$V_{GS} = -4.5\ \text{V}, I_D = -6.0\ \text{A}$		0.033	0.040	Ω
		$V_{GS} = -2.5\ \text{V}, I_D = -5.2\ \text{A}$		0.044	0.053	
		$V_{GS} = -1.8\ \text{V}, I_D = -2.0\ \text{A}$		0.060	0.072	
Forward Transconductance ^a	g_{fs}	$V_{DS} = -5\ \text{V}, I_D = -6.0\ \text{A}$		15		S
Diode Forward Voltage ^a	V_{SD}	$I_S = -1.7\ \text{A}, V_{GS} = 0\ \text{V}$		-0.7	-1.2	V
Dynamic^b						
Total Gate Charge	Q_g	$V_{DS} = -6\ \text{V}, V_{GS} = -4.5\ \text{V}, I_D = -6.0\ \text{A}$		9.3	14	nC
Gate-Source Charge	Q_{gs}			1.5		
Gate-Drain Charge	Q_{gd}			2.6		
Turn-On Delay Time	$t_{d(on)}$	$V_{DD} = -6\ \text{V}, R_L = 6\ \Omega$ $I_D \cong -1\ \text{A}, V_{GEN} = -4.5\ \text{V}, R_g = 6\ \Omega$		20	30	ns
Rise Time	t_r			46	70	
Turn-Off Delay Time	$t_{d(off)}$			62	95	
Fall Time	t_f			62	95	
Source-Drain Reverse Recovery Time	t_{rr}	$I_F = -1.7\ \text{A}, di/dt = 100\ \text{A}/\mu\text{s}$		40	80	

Notes







a. Pulse test; pulse width $\leq 300\ \mu\text{s}$, duty cycle $\leq 2\%$.

b. Guaranteed by design, not subject to production testing.



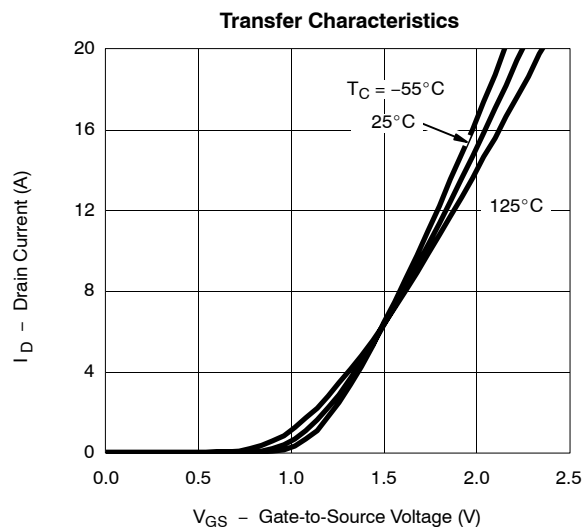
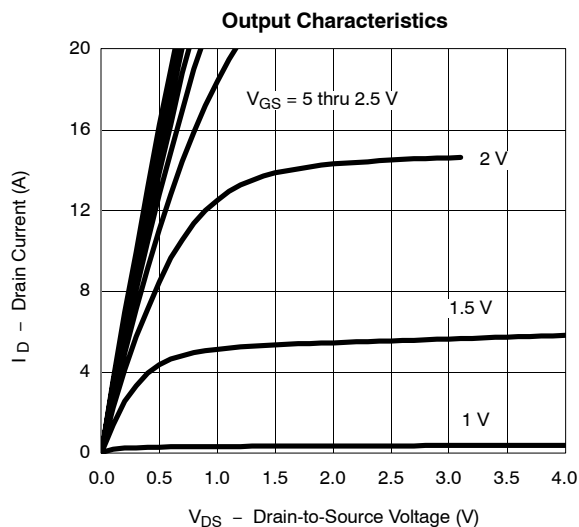
TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)



TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

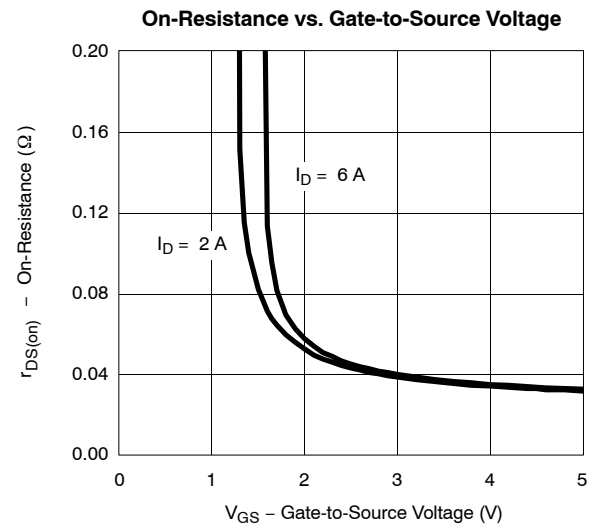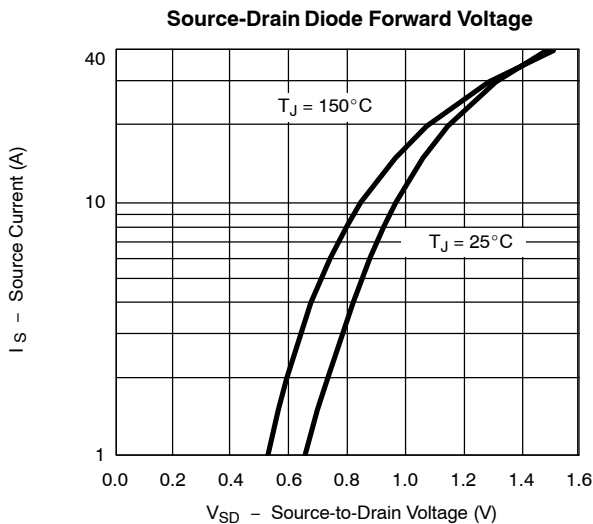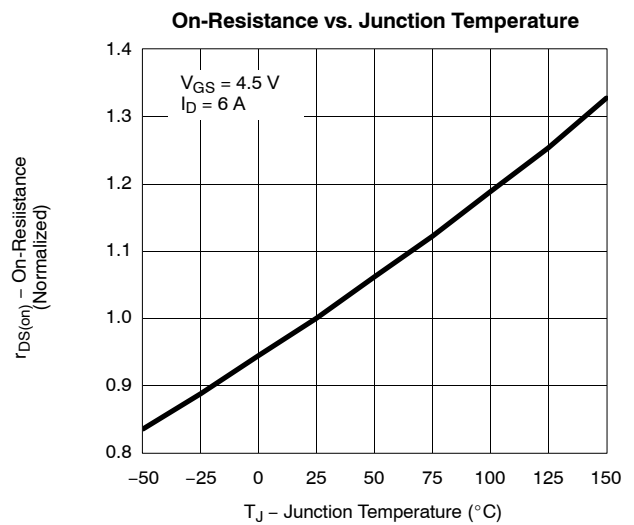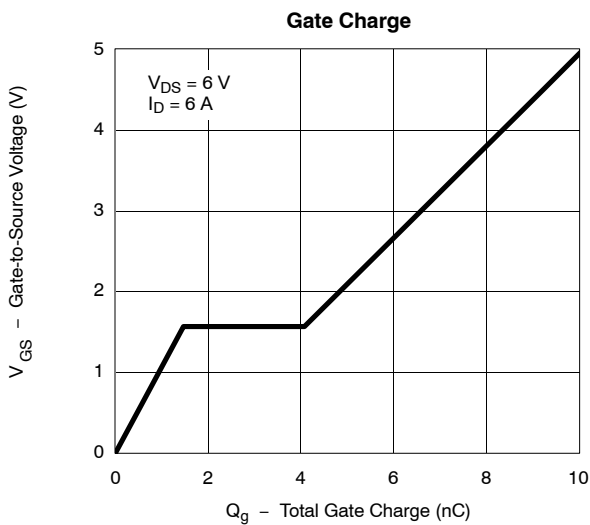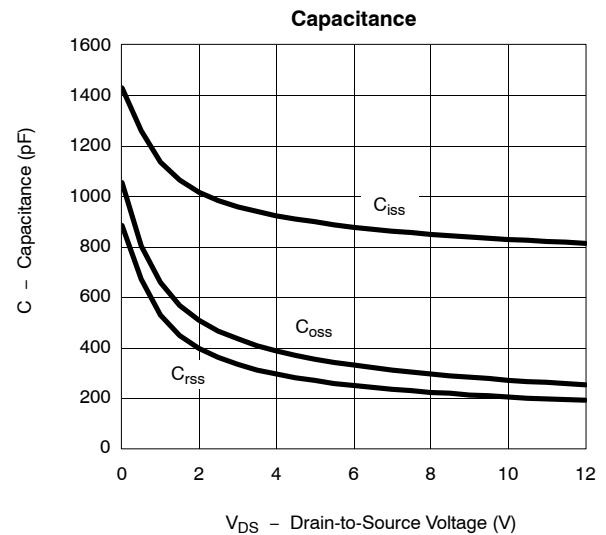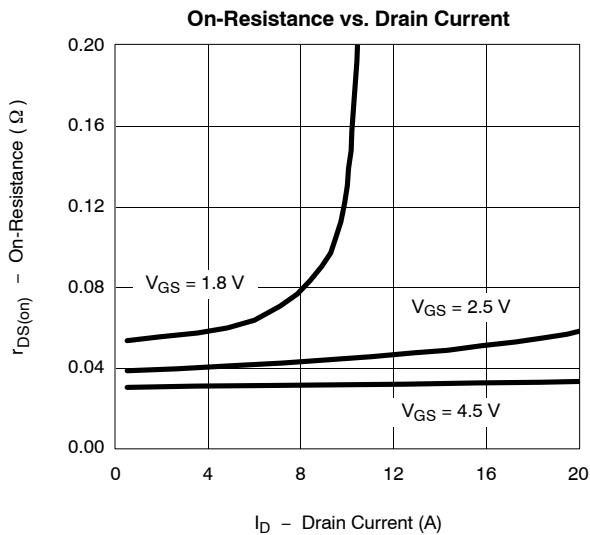


TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)

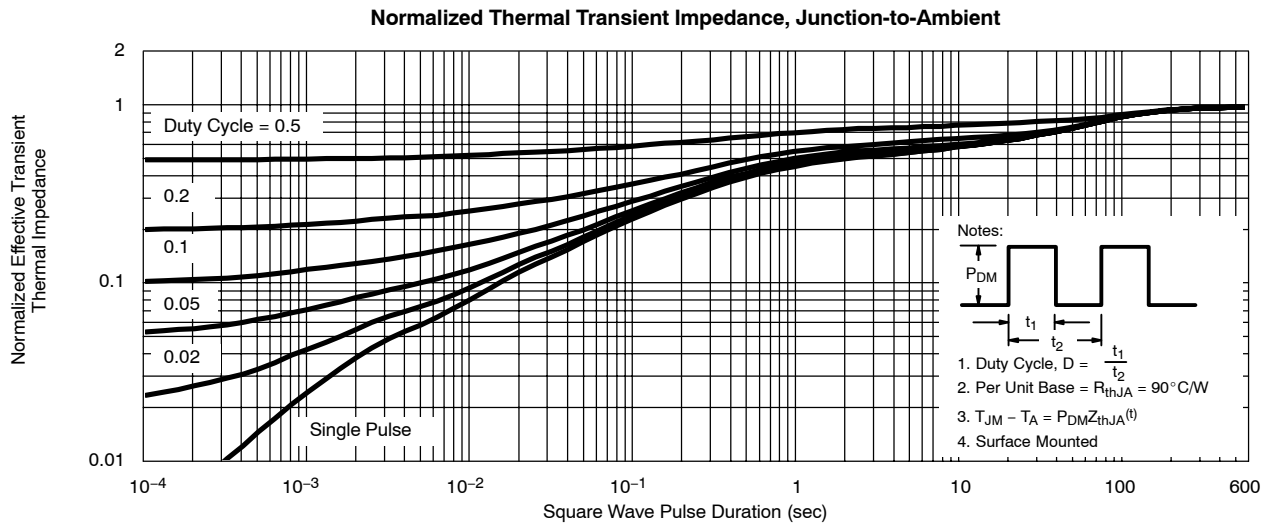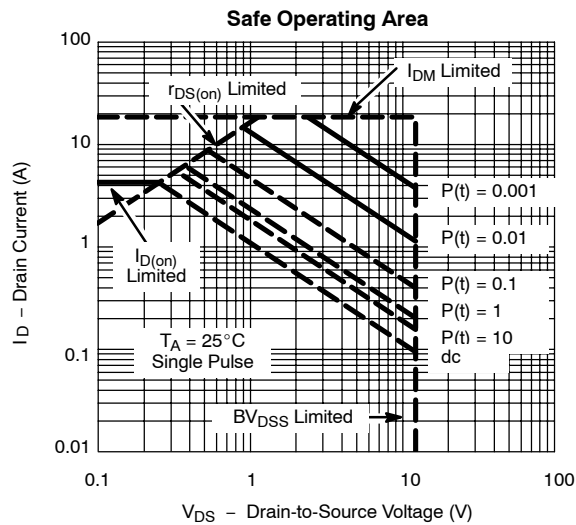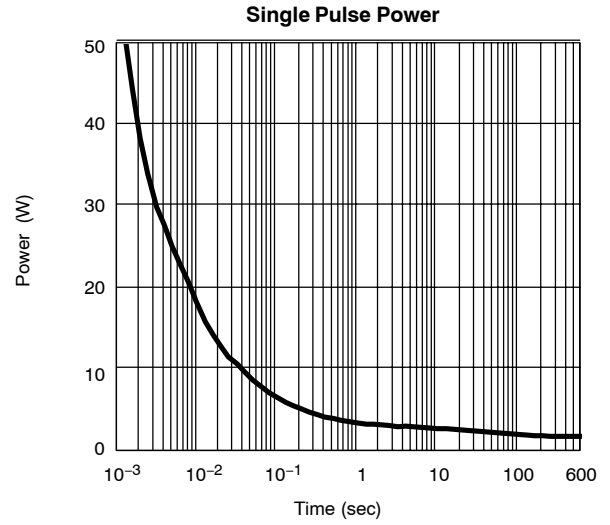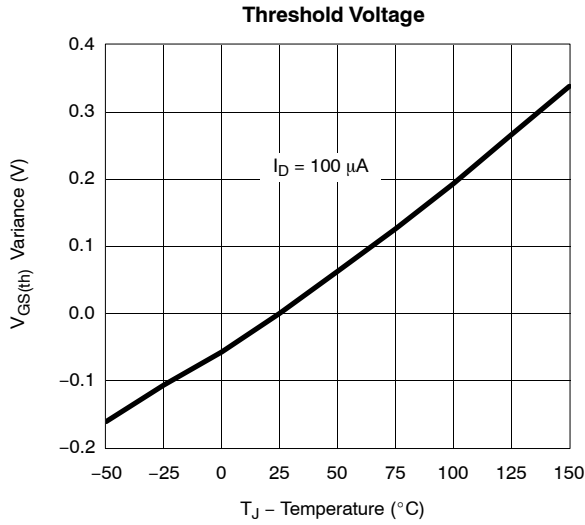



TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)

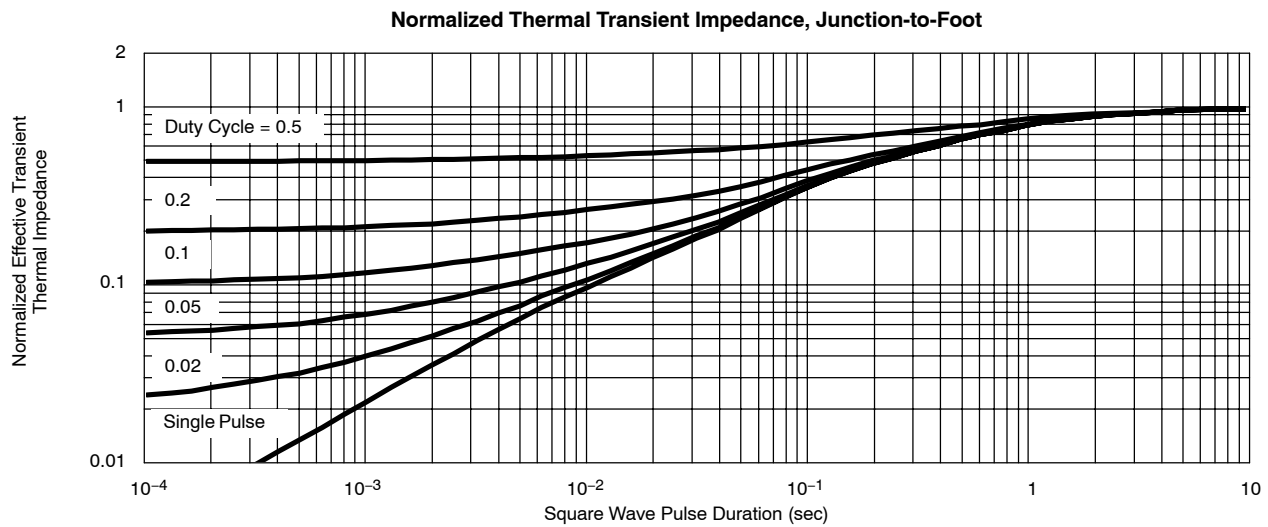

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com