

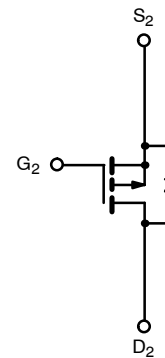


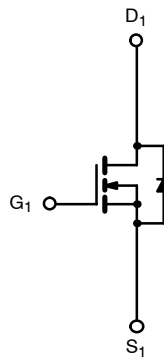

## N- and P-Channel 30-V (D-S) MOSFET

PRODUCT SUMMARY			
	V <sub>DS</sub> (V)	r <sub>DS(on)</sub> (Ω)	I <sub>D</sub> (A)
N-Channel	30	0.053 @ V <sub>GS</sub> = 10 V	4.9
		0.075 @ V <sub>GS</sub> = 4.5 V	4.1
P-Channel	-30	0.080 @ V <sub>GS</sub> = -10 V	-3.9
		0.135 @ V <sub>GS</sub> = -4.5 V	-3.0

**TrenchFET®**  
Power MOSFETS

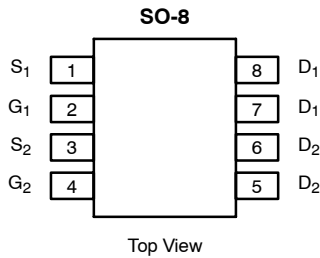

Ordering Information: Si4532ADY  
Si4532ADY-T1 (with Tape and Reel)

ABSOLUTE MAXIMUM RATINGS (T <sub>A</sub> = 25 °C UNLESS OTHERWISE NOTED)							
Parameter	Symbol	N-Channel		P-Channel		Unit	
		10 secs	Steady State	10 secs	Steady State		
Drain-Source Voltage	V <sub>DS</sub>	30		-30		V	
Gate-Source Voltage	V <sub>GS</sub>	±20		±20		V	
Continuous Drain Current (T <sub>J</sub> = 150 °C) <sup>a</sup>	I <sub>D</sub>	T <sub>A</sub> = 25 °C	4.9	3.7	-3.9	-3.0	A
		T <sub>A</sub> = 70 °C	3.9	2.9	-3.1	-2.4	
Pulsed Drain Current	I <sub>DM</sub>	20				A	
Continuous Source Current (Diode Conduction) <sup>a</sup>	I <sub>S</sub>	1.7	0.94	-1.7	-1.0	A	
Maximum Power Dissipation <sup>a</sup>	P <sub>D</sub>	T <sub>A</sub> = 25 °C	2	1.13	2	1.2	W
		T <sub>A</sub> = 70 °C	1.3	0.73	1.3	0.76	
Operating Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to 150				°C	

THERMAL RESISTANCE RATINGS							
Parameter	Symbol	N-Channel		P-Channel		Unit	
		Typ	Max	Typ	Max		
Maximum Junction-to-Ambient <sup>a</sup>	R <sub>thJA</sub>	t ≤ 10 sec	55	62.5	54	62.5	°C/W
		Steady State	90	110	87	105	
Maximum Junction-to-Foot (Drain)	R <sub>thJF</sub>	40	50	34	45	°C/W	

Notes

a. Surface Mounted on 1" x 1" FR4 Board.

SPECIFICATIONS (T <sub>J</sub> = 25 °C UNLESS OTHERWISE NOTED)							
Parameter	Symbol	Test Condition		Min	Typ	Max	Unit
<b>Static</b>							
Gate Threshold Voltage	V <sub>GS(th)</sub>	V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 250 μA	N-Ch	1.0			V
		V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = -250 μA	P-Ch	-1.0			
Gate-Body Leakage	I <sub>GSS</sub>	V <sub>DS</sub> = 0 V, V <sub>GS</sub> = ±20 V	N-Ch			±100	nA
		V <sub>DS</sub> = 0 V, V <sub>GS</sub> = ±20 V	P-Ch			±100	
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>DS</sub> = 30 V, V <sub>GS</sub> = 0 V	N-Ch			1	μA
		V <sub>DS</sub> = -30 V, V <sub>GS</sub> = 0 V	P-Ch			-1	
		V <sub>DS</sub> = 30 V, V <sub>GS</sub> = 0 V, T <sub>J</sub> = 55 °C	N-Ch			5	
		V <sub>DS</sub> = -30 V, V <sub>GS</sub> = 0 V, T <sub>J</sub> = 55 °C	P-Ch			-5	
On-State Drain Current <sup>a</sup>	I <sub>D(on)</sub>	V <sub>DS</sub> ≥ 5 V, V <sub>GS</sub> = 10 V	N-Ch	20			A
		V <sub>DS</sub> ≤ -5 V, V <sub>GS</sub> = -10 V	P-Ch	-20			
Drain-Source On-State Resistance <sup>a</sup>	r <sub>DS(on)</sub>	V <sub>GS</sub> = 10 V, I <sub>D</sub> = 4.9 A	N-Ch		0.044	0.053	Ω
		V <sub>GS</sub> = -10 V, I <sub>D</sub> = -3.9 A	P-Ch		0.062	0.080	
		V <sub>GS</sub> = 4.5 V, I <sub>D</sub> = 4.1 A	N-Ch		0.062	0.075	
		V <sub>GS</sub> = -4.5 V, I <sub>D</sub> = -3.0 A	P-Ch		0.105	0.135	
Forward Transconductance <sup>a</sup>	g <sub>fs</sub>	V <sub>DS</sub> = 15 V, I <sub>D</sub> = 4.9 A	N-Ch		11		S
		V <sub>DS</sub> = -15 V, I <sub>D</sub> = -2.5 A	P-Ch		5		
Diode Forward Voltage <sup>a</sup>	V <sub>SD</sub>	I <sub>S</sub> = 1.7 A, V <sub>GS</sub> = 0 V	N-Ch		0.80	1.2	V
		I <sub>S</sub> = -1.7 A, V <sub>GS</sub> = 0 V	P-Ch		-0.82	-1.2	
<b>Dynamic<sup>b</sup></b>							
Total Gate Charge	Q <sub>g</sub>	N-Channel V <sub>DS</sub> = 10 V, V <sub>GS</sub> = 10 V, I <sub>D</sub> = 4.9 A P-Channel V <sub>DS</sub> = -4 V, V <sub>GS</sub> = -10 V, I <sub>D</sub> = -3.9 A	N-Ch		8	16	nC
Gate-Source Charge	Q <sub>gs</sub>		N-Ch		1.4		
			P-Ch		2		
Gate-Drain Charge	Q <sub>gd</sub>		N-Ch		1.2		
		P-Ch		1.9			
Turn-On Delay Time	t <sub>d(on)</sub>	N-Channel V <sub>DD</sub> = 10 V, R <sub>L</sub> = 10 Ω I <sub>D</sub> ≅ 1 A, V <sub>GEN</sub> = 10 V, R <sub>G</sub> = 6 Ω P-Channel V <sub>DD</sub> = -10 V, R <sub>L</sub> = 10 Ω I <sub>D</sub> ≅ -1 A, V <sub>GEN</sub> = -10 V, R <sub>G</sub> = 6 Ω	N-Ch		12	20	ns
Rise Time	t <sub>r</sub>		N-Ch		10	20	
			P-Ch		9	18	
Turn-Off Delay Time	t <sub>d(off)</sub>		N-Ch		23	45	
			P-Ch		21	40	
Fall Time	t <sub>f</sub>		N-Ch		8	15	
			P-Ch		10	20	
Source-Drain Reverse Recovery Time	t <sub>rr</sub>		I <sub>F</sub> = 1.7 A, di/dt = 100 A/μs	N-Ch		25	
		I <sub>F</sub> = -1.7 A, di/dt = 100 A/μs	P-Ch		27	40	







## Notes

- a. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.  
 b. Guaranteed by design, not subject to production testing.








**TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)**

**NCHANNEL**

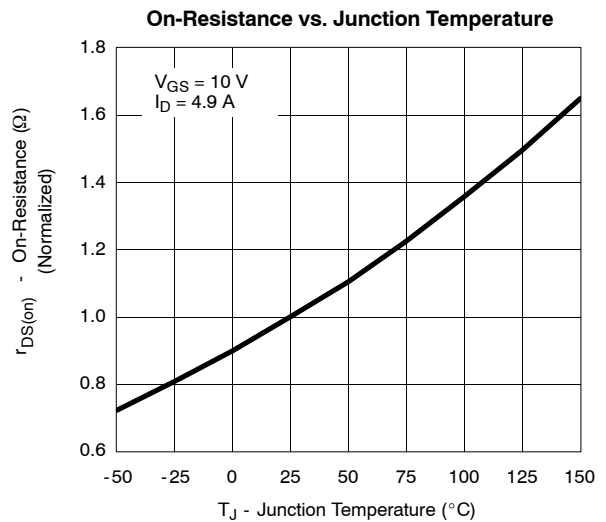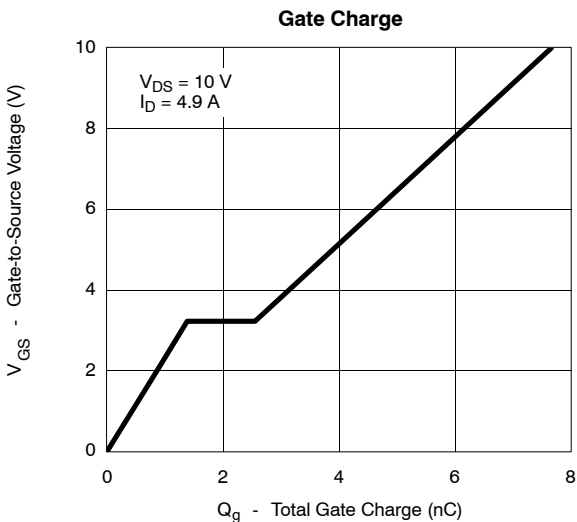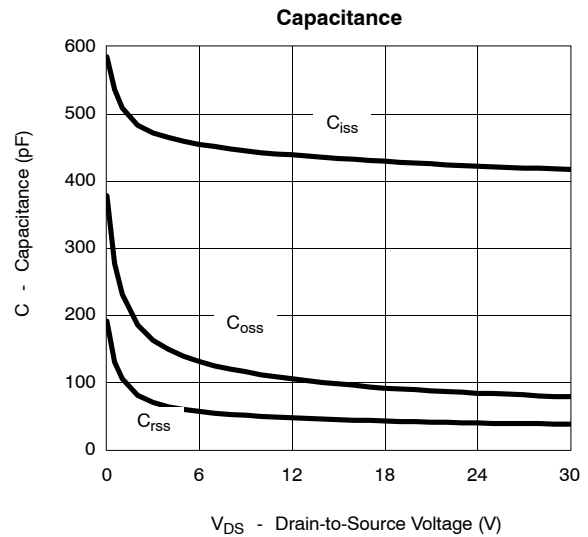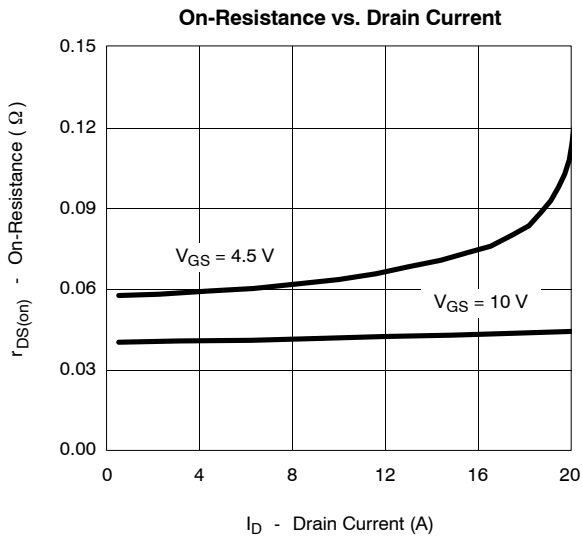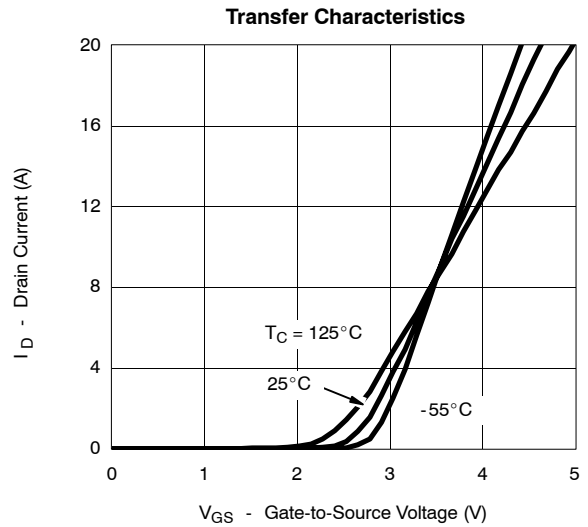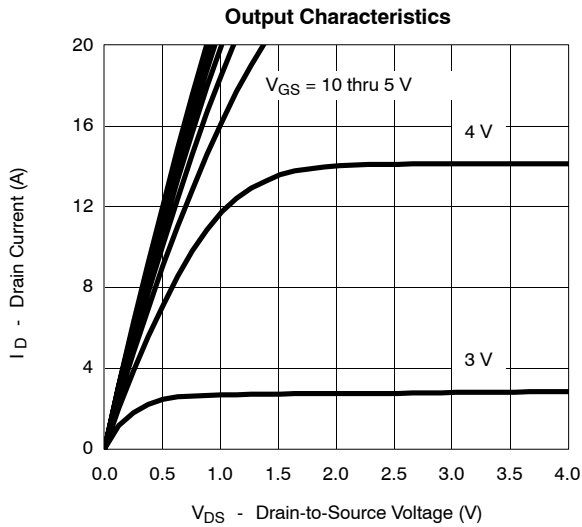


**TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED) NCHANNEL**

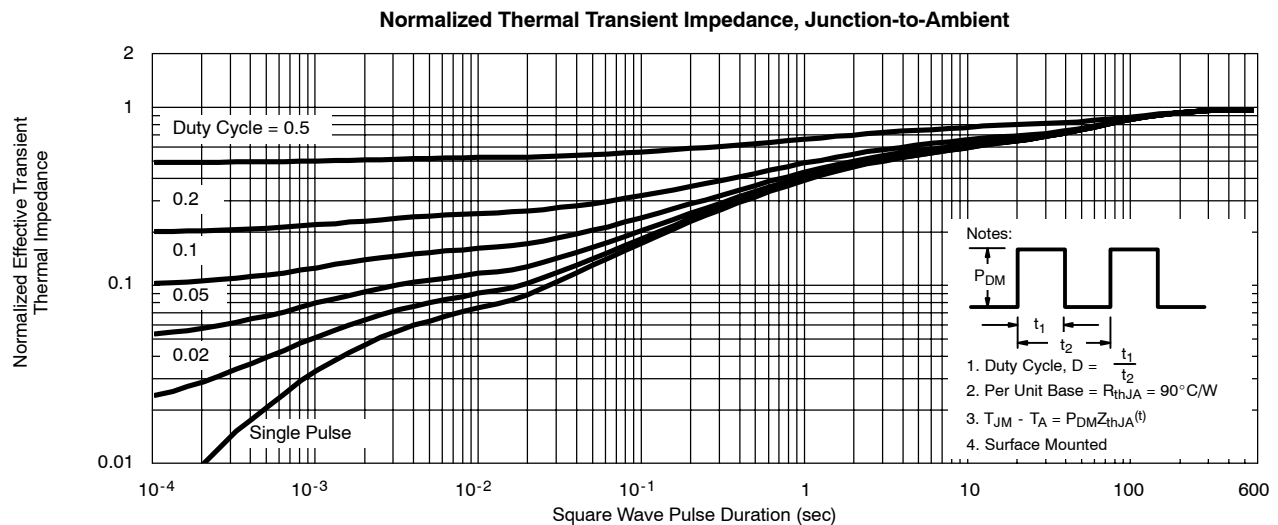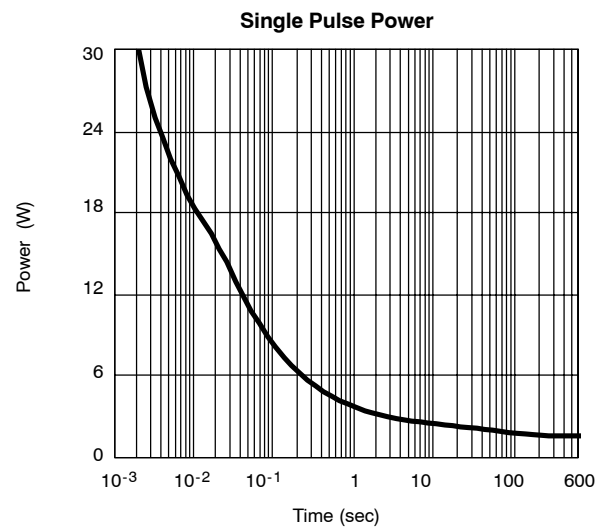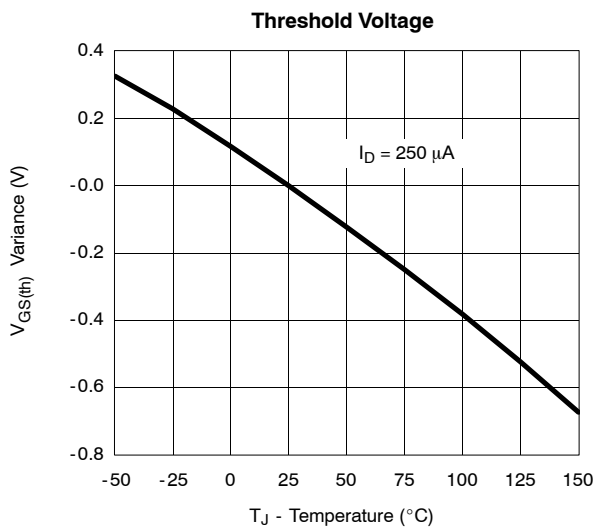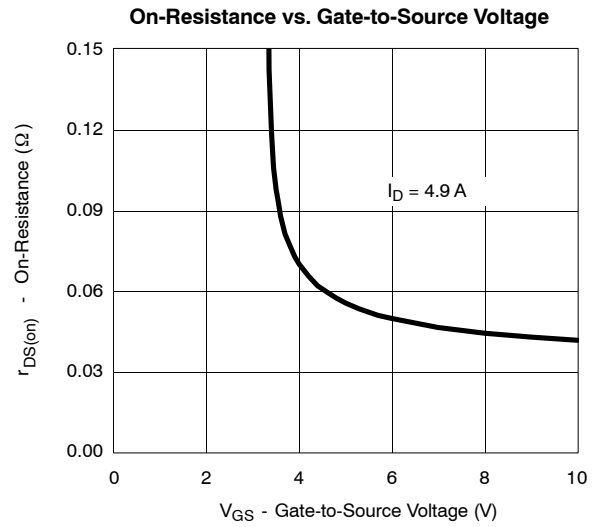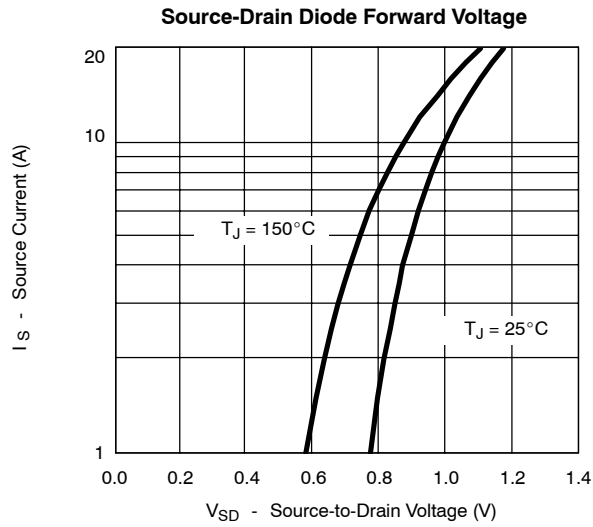







**TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)**

**NCHANNEL**






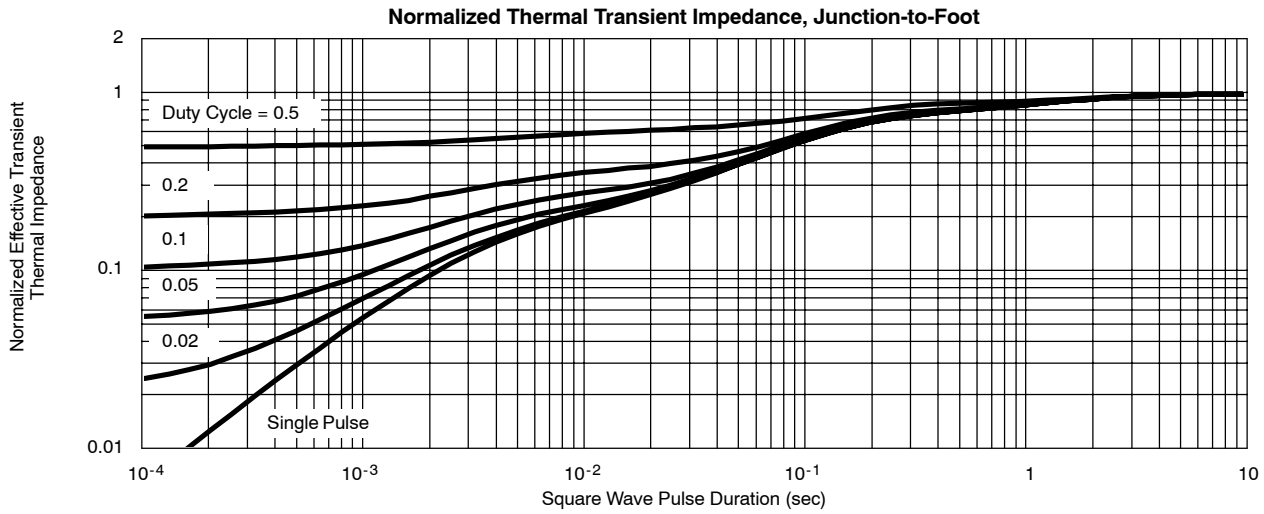


**TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)**

**PCHANNEL**

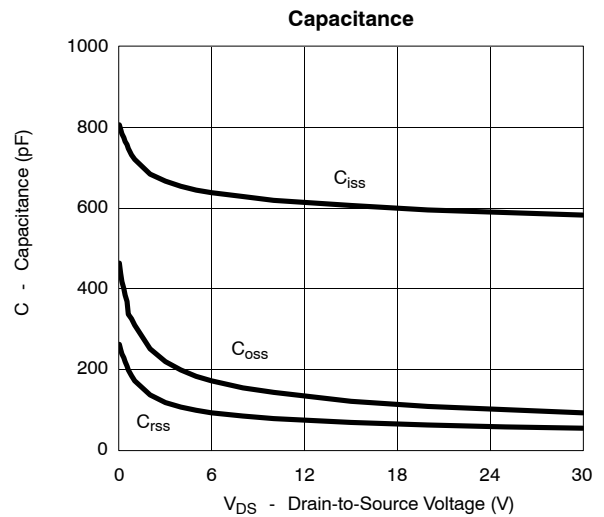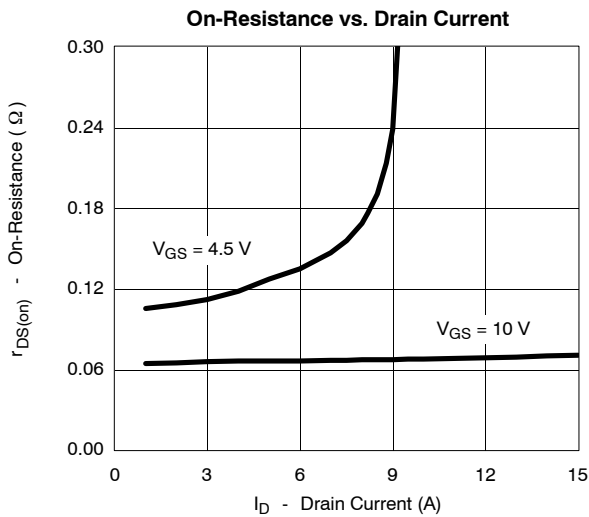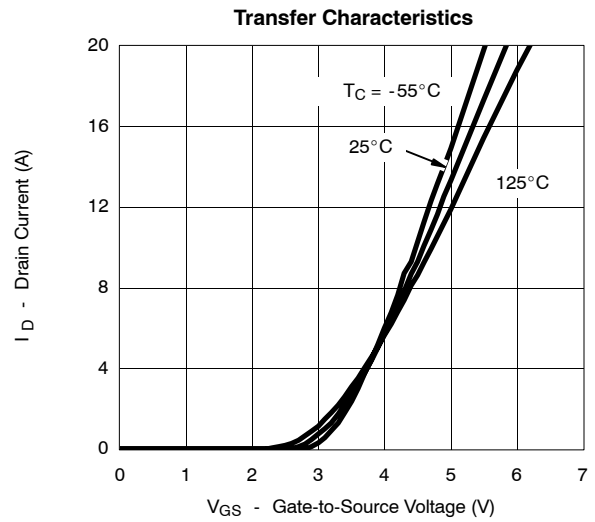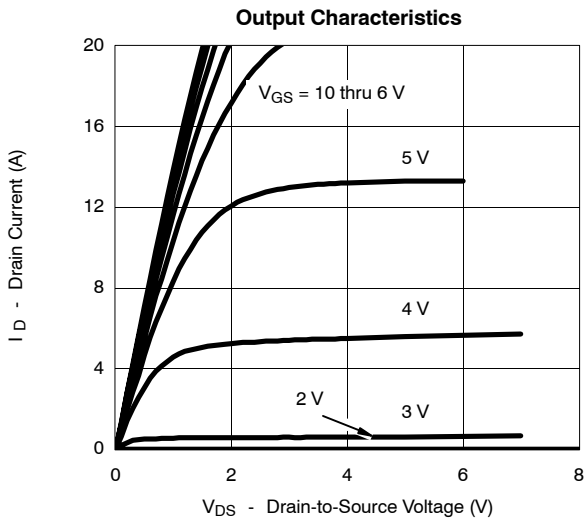


**TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED) PCHANNEL**

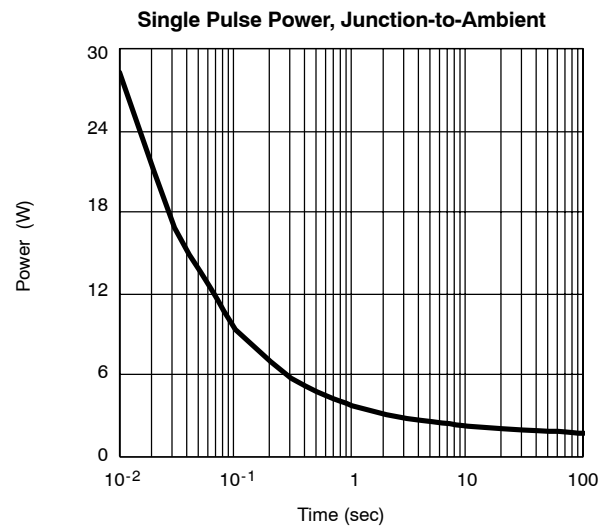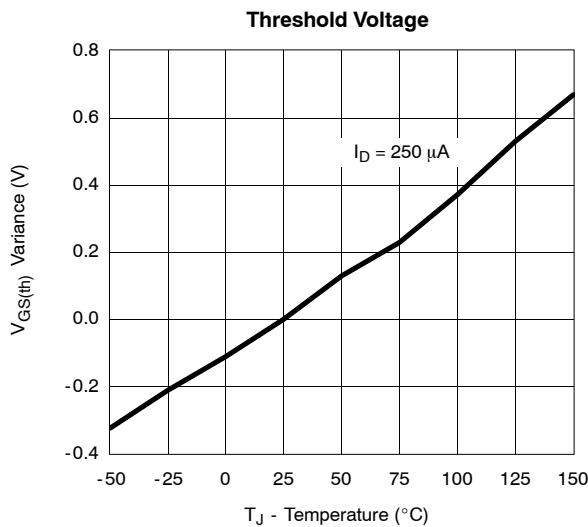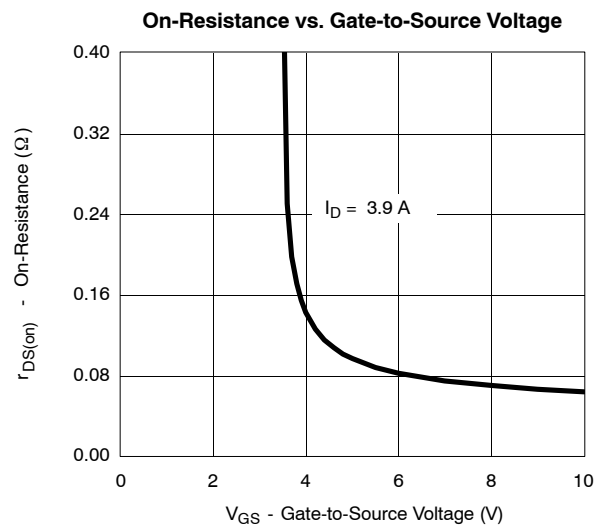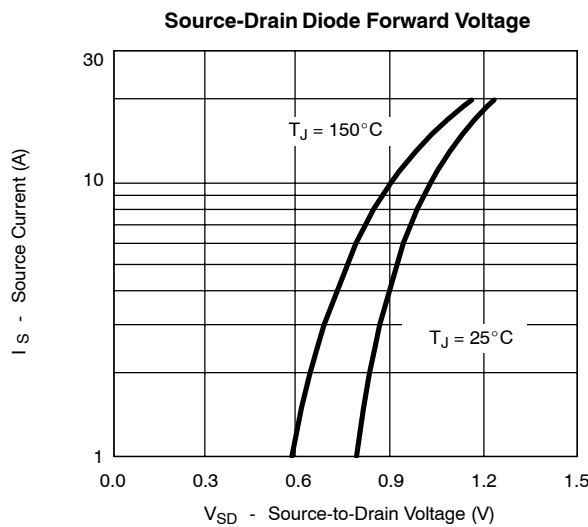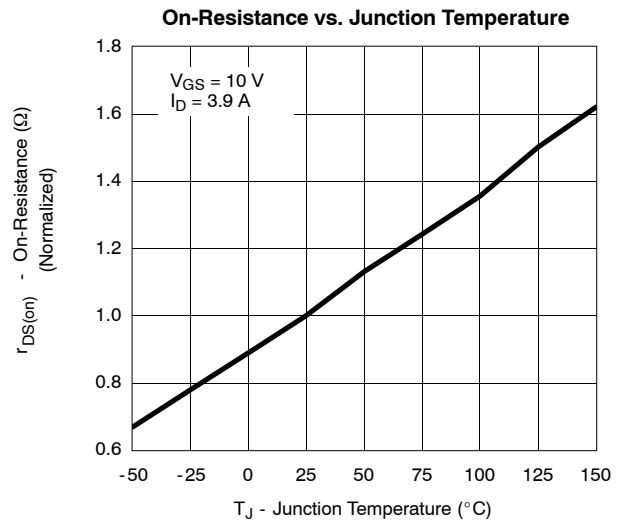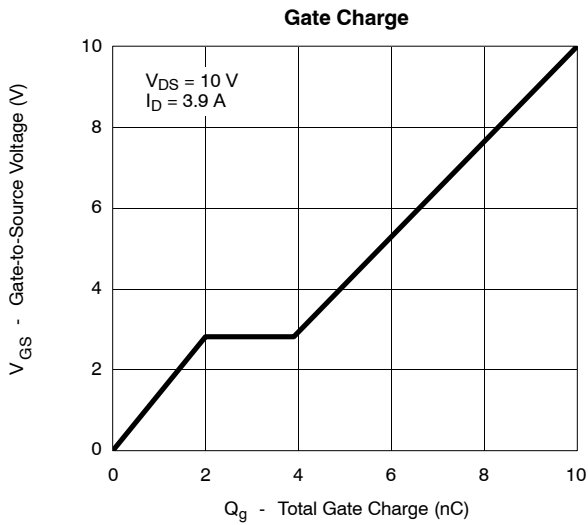




**TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED) PCHANNEL**

Normalized Thermal Transient Impedance, Junction-to-Ambient

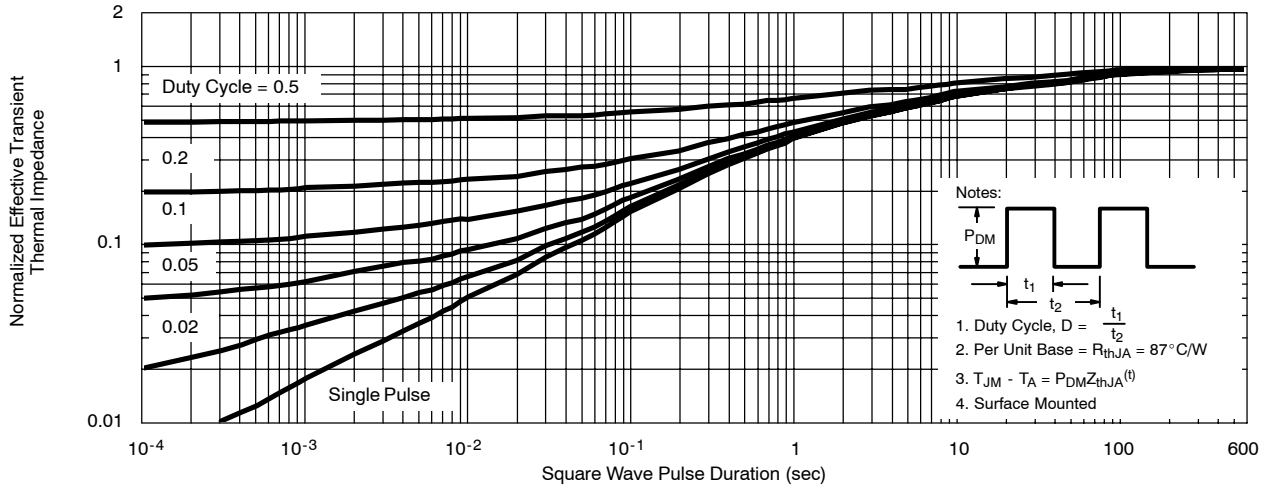

Normalized Thermal Transient Impedance, Junction-to-Foot

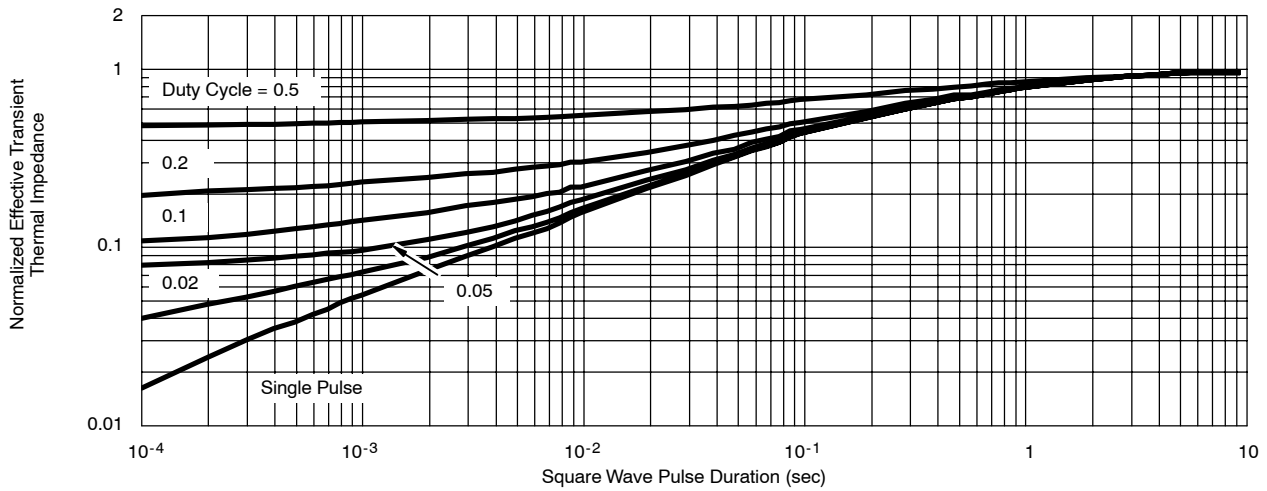



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.