

# SLA5094

查询SLA5094供应商

N-channel

捷多邦，专业PCB打样工厂，24小时加急出货

General purpose

External dimensions A...SLA (12-pin)


## Absolute maximum ratings

(Ta=25°C)

Symbol	Ratings	Unit
V <sub>DSS</sub>	200	V
V <sub>GSS</sub>	±20	V
I <sub>D</sub>	±7	A
I <sub>D(pulse)</sub>	±15 (PW≤100μs, duty≤1%)	A
E <sub>AS</sub> *	55	mJ
I <sub>AS</sub> *	7	A
P <sub>T</sub>	5 (Ta=25°C, with all circuits operating, without heatsink) 35 (Tc=25°C, with all circuits operating, with infinite heatsink)	W
θ <sub>j-a</sub>	25 (Junction-Air, Ta=25°C, with all circuits operating)	°C/W
θ <sub>j-c</sub>	3.57 (Junction-Case, Tc=25°C, with all circuits operating)	°C/W
V <sub>ISO</sub>	1000 (Between fin and lead pin, AC)	Vrms
T <sub>ch</sub>	150	°C
T <sub>stg</sub>	-40 to +150	°C

\* : V<sub>DD</sub>=25V, L=2mH, I<sub>D</sub>=7A, unclamped, R<sub>G</sub>=50Ω, see Fig. E on page 15.

## Equivalent circuit diagram

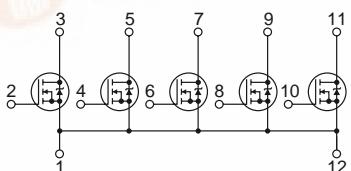

## Electrical characteristics

(Ta=25°C)

Symbol	Specification			Unit	Conditions
	min	typ	max		
V <sub>(BR)DSS</sub>	200			V	I <sub>D</sub> =100μA, V <sub>GS</sub> =0V
I <sub>GSS</sub>			±100	nA	V <sub>GS</sub> =±20V
I <sub>DSS</sub>			100	μA	V <sub>DS</sub> =200V, V <sub>GS</sub> =0V
V <sub>TH</sub>	1.0		2.0	V	V <sub>DS</sub> =10V, I <sub>D</sub> =250μA
R <sub>e(yfs)</sub>	4	7		S	V <sub>DS</sub> =10V, I <sub>D</sub> =3.5A
R <sub>D(S(ON))</sub>		280	350	mΩ	V <sub>GS</sub> =10V, I <sub>D</sub> =3.5A
		320	480	mΩ	V <sub>GS</sub> =4V, I <sub>D</sub> =3.5A
C <sub>iss</sub>		420		pF	V <sub>DS</sub> =10V,
C <sub>oss</sub>		210		pF	f=1.0MHz,
C <sub>rss</sub>		90		pF	V <sub>GS</sub> =0V
t <sub>d(on)</sub>		16		ns	I <sub>D</sub> =3.5A, V <sub>DD</sub> =100V,
t <sub>r</sub>		60		ns	R <sub>L</sub> =28.6Ω,
t <sub>d(off)</sub>		100		ns	V <sub>GS</sub> =5V,
t <sub>f</sub>		70		ns	see Fig. 3 on page 16.
V <sub>SD</sub>		1.0	1.5	V	I <sub>D</sub> =7A, V <sub>GS</sub> =0V

## Characteristic curves