

Reflecting small LEDs, directly mountable ($\phi 3.1$ mm)


SLR-342 Series

The SLR-342 series are small 3.1 mm LEDs which can be directly mounted on a printed circuit board. Four colors and two lens types are available for a total of eight types, and they are suitable for use in a wide variety of applications.

●Features

- 1) Four colors : red, orange, yellow and green.
- 2) Two lens types : Colored diffused and Colored clear.
- 3) Compact epoxy resin package with a diameter of 3.1 mm.
- 4) High reliability.

●External dimensions (Units: mm)

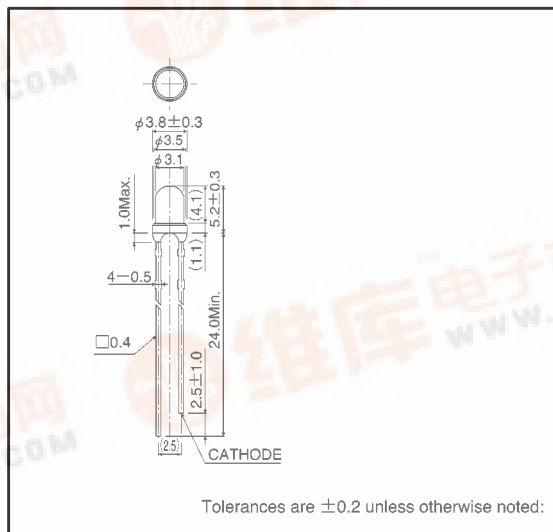

●Selection guide

| Emitting color | Red | Orange | Yellow | Green |
|------------------|-----------|-----------|-----------|-----------|
| Lens | | | | |
| Colored diffused | SLR-342VR | SLR-342DU | SLR-342YY | SLR-342MG |
| Colored clear | SLR-342VC | SLR-342DC | SLR-342YC | SLR-342MC |

●Absolute maximum ratings (Ta = 25°C)

| Parameter | Symbol | Red | Orange | Yellow | Green | Unit |
|-----------------------|------------------|-------------------------|------------------------|------------------------|------------------------|------|
| | | SLR-342VR SLR-342VC | SLR-342DU SLR-342DC | SLR-342YY SLR-342YC | SLR-342MG SLR-342MC | |
| Power dissipation | P _D | 60 | 60 | 60 | 75 | mW |
| Forward current | I _F | 20 | 20 | 20 | 25 | mA |
| Peak forward current | I _{FP} | 60* | 60* | 60* | 60* | mA |
| Reverse voltage | V _R | 3 | 3 | 3 | 3 | V |
| Operating temperature | T _{opr} | -25~+85 | | | | °C |
| Storage temperature | T _{stg} | -30~+100 | | | | °C |
| Soldering temperature | — | 260°C 5 seconds maximum | | | | — |

* Pulse width 1ms Duty 1 / 5

●Electrical and optical characteristics (Ta = 25°C)

| Parameter | Symbol | Conditions | Red | | | Orange | | | Yellow | | | Green | | | Unit |
|--------------------------|-----------------|-------------------|------|------|------|--------|------|------|--------|------|------|-------|------|------|---------------|
| | | | Min. | Typ. | Max. | Min. | Typ. | Max. | Min. | Typ. | Max. | Min. | Typ. | Max. | |
| Forward voltage | V_F | $I_F=10\text{mA}$ | — | 2.0 | 3.0 | — | 2.0 | 3.0 | — | 2.1 | 3.0 | — | 2.1 | 3.0 | V |
| Reverse current | I_R | $V_R=3\text{V}$ | — | — | 10 | — | — | 10 | — | — | 10 | — | — | 10 | μA |
| Peak wavelength | λ_P | $I_F=10\text{mA}$ | — | 650 | — | — | 610 | — | — | 585 | — | — | 563 | — | nm |
| Spectral line half width | $\Delta\lambda$ | $I_F=10\text{mA}$ | — | 40 | — | — | 40 | — | — | 40 | — | — | 40 | — | nm |
| Viewing angle | $2\theta_{1/2}$ | Diffused | — | 40 | — | — | 40 | — | — | 40 | — | — | 40 | — | deg |
| | | Transparent | — | 40 | — | — | 40 | — | — | 40 | — | — | 40 | — | |

●Luminous intensity vs. wavelength

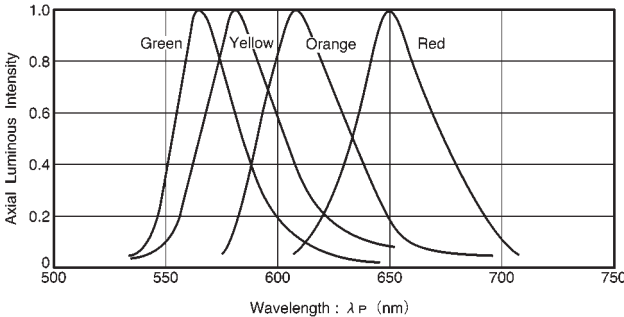


Fig. 1

●Luminous intensity

| Color | λ_P | Type | Min. | Typ. | Max. | Unit |
|--------|-------------|-----------|------|------|------|------|
| Red | 650 | SLR-342VR | 5.6 | 16.0 | — | mcd |
| | | SLR-342VC | 9.0 | 25.0 | — | mcd |
| Orange | 610 | SLR-342DU | 5.6 | 16.0 | — | mcd |
| | | SLR-342DC | 9.0 | 25.0 | — | mcd |
| Yellow | 585 | SLR-342YY | 3.6 | 10 | — | mcd |
| | | SLR-342YC | 5.6 | 16.0 | — | mcd |
| Green | 563 | SLR-342MG | 5.6 | 16.0 | — | mcd |
| | | SLR-342MC | 9.0 | 25.0 | — | mcd |

Note: Measured at $I_F = 10\text{mA}$

●Directional pattern

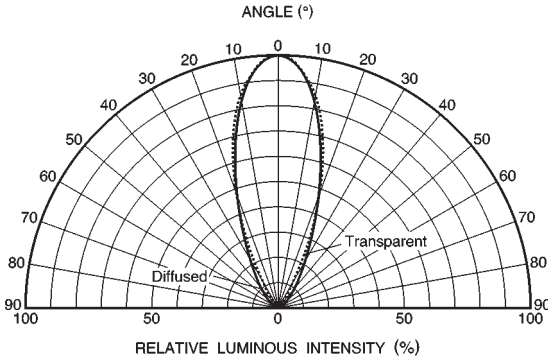


Fig. 2

● Electrical characteristic curves 1 (red)

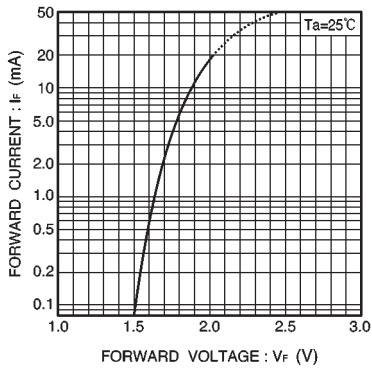


Fig. 3 Forward current vs. forward voltage

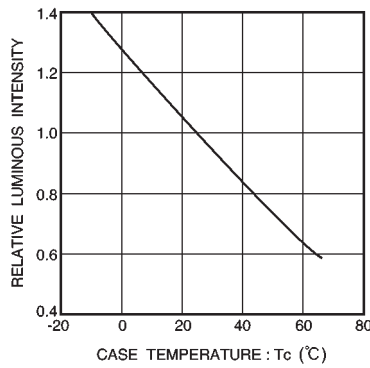


Fig. 4 Luminous intensity vs. case temperature

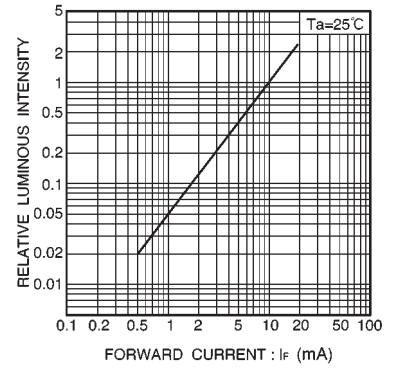


Fig. 5 Luminous intensity vs. forward current

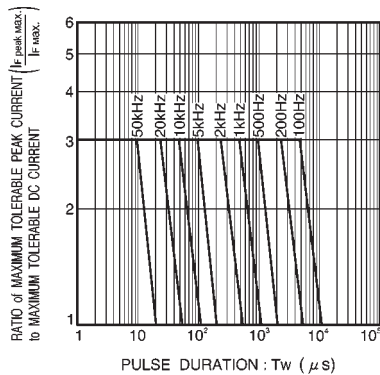


Fig. 6 Maximum tolerable peak current vs. pulse duration

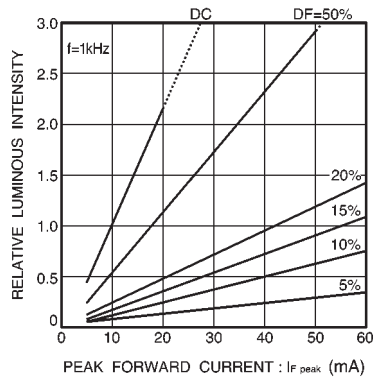


Fig. 7 Luminous intensity vs. peak forward current

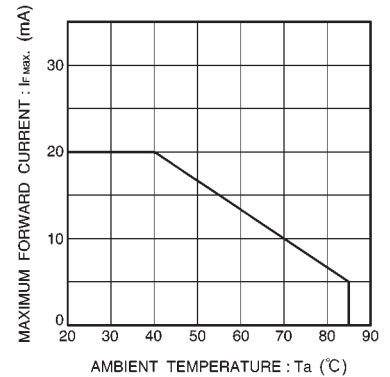


Fig. 8 Maximum forward current vs. ambient temperature

● Electrical characteristic curves 2 (orange)

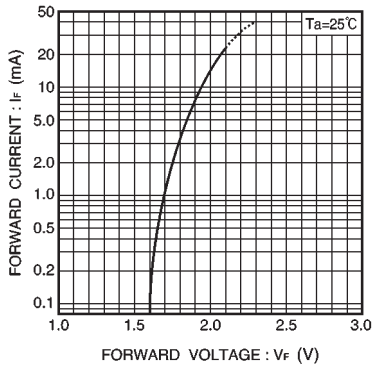


Fig. 9 Forward current vs. forward voltage

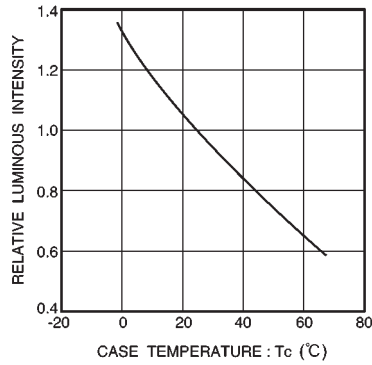


Fig. 10 Luminous intensity vs. case temperature

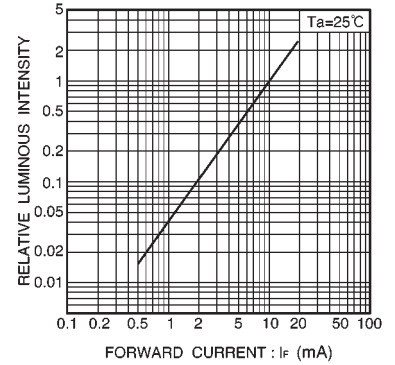


Fig. 11 Luminous intensity vs. forward current

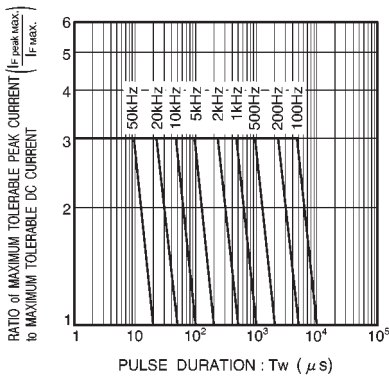


Fig. 12 Maximum tolerable peak current vs. pulse duration

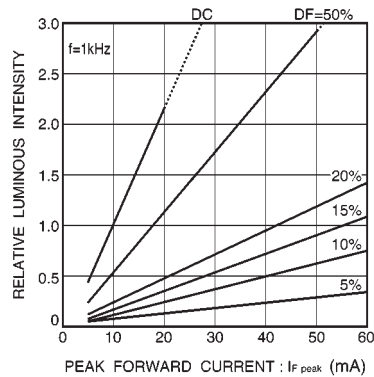


Fig. 13 Luminous intensity vs. peak forward current

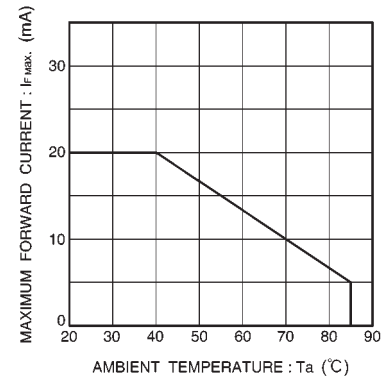


Fig. 14 Maximum forward current vs. ambient temperature

● Electrical characteristic curves 3 (yellow)

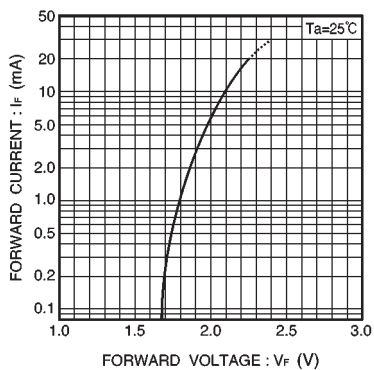


Fig. 15 Forward current vs. forward voltage

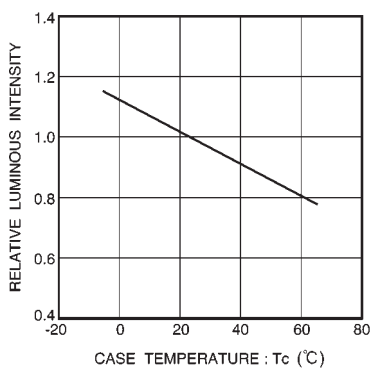


Fig. 16 Luminous intensity vs. case temperature

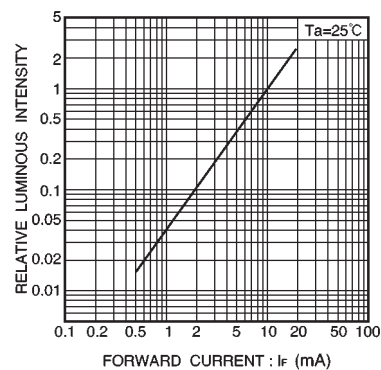


Fig. 17 Luminous intensity vs. forward current

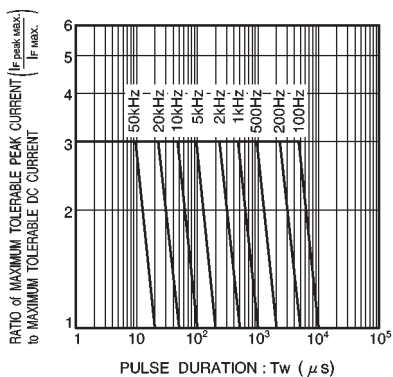


Fig. 18 Maximum tolerable peak current vs. pulse duration

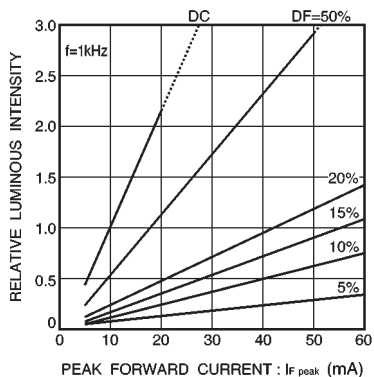


Fig. 19 Luminous intensity vs. peak forward current

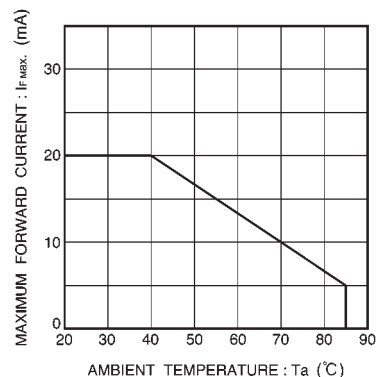


Fig. 20 Maximum forward current vs. ambient temperature

● Electrical characteristic curves 4 (green)

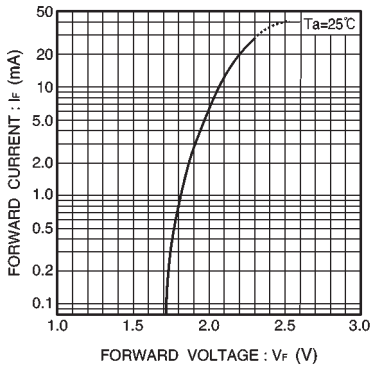


Fig. 21 Forward current vs. forward voltage

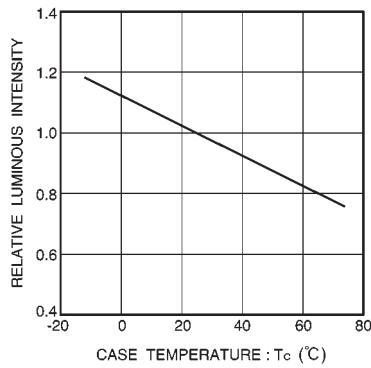


Fig. 22 Luminous intensity vs. case temperature

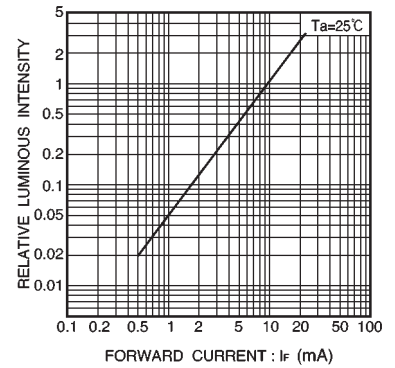


Fig. 23 Luminous intensity vs. forward current

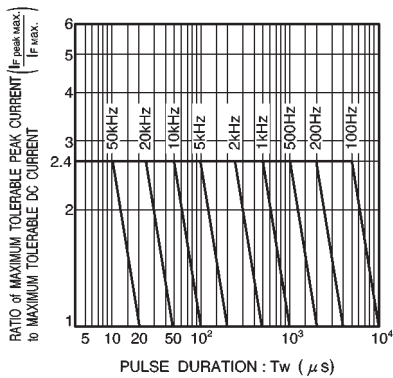


Fig. 24 Maximum tolerable peak current vs. pulse duration

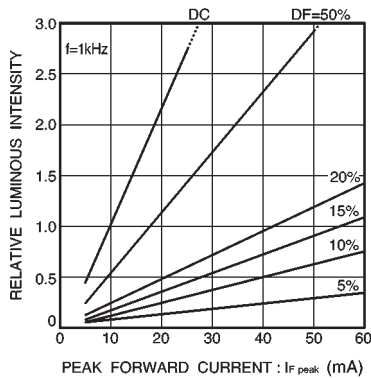


Fig. 25 Luminous intensity vs. peak forward current

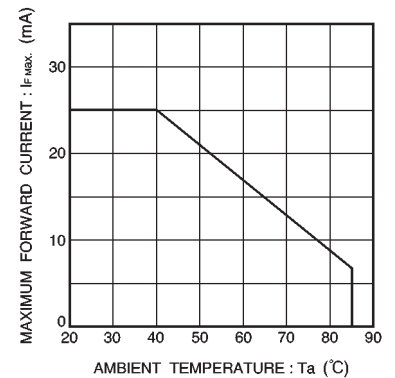


Fig. 26 Maximum forward current vs. ambient temperature