

SMA5118

查询SMA5118供应商

N-channel

捷多邦，专业PCB打样工厂，24小时加急出货

3-phase DC motor 200V AC direct drive External dimensions B...SMA


Absolute maximum ratings

(Ta=25°C)

Symbol	Ratings	Unit
V _{DSS}	500	V
V _{GSS}	±30	V
I _D	±5	A
I _{D(pulse)}	±10 (PW≤1ms, Du≤1%)	A
E _{AS*}	45	mJ
P _T	4 (Ta=25°C, with all circuits operating, without heatsink) 35 (Tc=25°C, with all circuits operating, with infinite heatsink)	W
θ _{j-a}	31.2 (Junction-Air, Ta=25°C, with all circuits operating)	°C/W
θ _{j-c}	3.57 (Junction-Case, Tc=25°C, with all circuits operating)	°C/W
T _{ch}	150	°C
T _{stg}	-40 to +150	°C

* : V_{DD}=30V, L=3.4mH, I_D=5A, unclamped, R_G=50Ω, see Fig. E on page 15.

■Equivalent circuit diagram

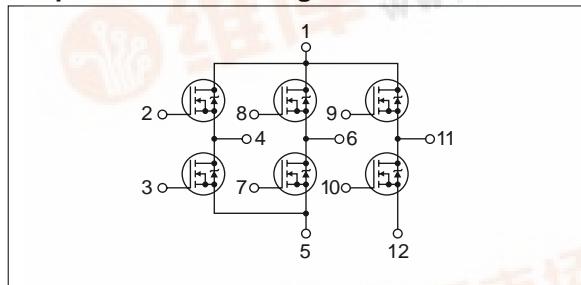


Electrical characteristics

(Ta=25°C)


Symbol	Specification			Unit	Conditions
	min	typ	max		
V _{(BR)DSS}	500			V	I _D =100μA, V _{GS} =0V
I _{GSS}			±100	nA	V _{GS} =±30V
I _{DSS}			100	μA	V _{Ds} =500V, V _{GS} =0V
V _{TH}	2.0		4.0	V	V _{Ds} =10V, I _D =1mA
R _{e(yfs)}	2.4	4.0		S	V _{Ds} =10V, I _D =2.5A
R _{Ds(ON)}		1.05	1.4	Ω	V _{GS} =10V, I _D =2.5A
C _{iss}		770		pF	V _{Ds} =10V,
C _{oss}		290		pF	f=1.0MHz, V _{GS} =0V
t _{d(on)}		20		ns	I _D =2.5A,
t _r		25		ns	V _{DD} =200V,
t _{d(off)}		70		ns	R _L =80Ω, V _{GS} =10V,
t _f		65		ns	see Fig. 3 on page 16.
V _{SD}		1.1	1.5	V	I _{SD} =5A, V _{GS} =0V
t _{rr}		75		ns	I _{SD} =2.5A, di/dt=100A/μs

Characteristic curves


I_D-V_{Ds} Characteristics (Typical)

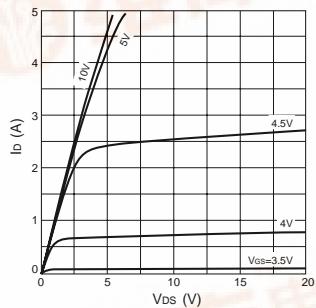


I_D-V_{Gs} Characteristics (Typical)

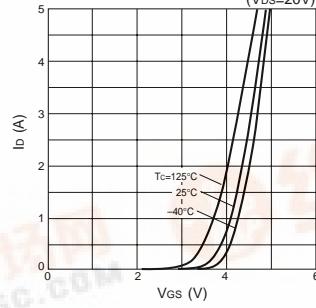


R_{Ds(ON)}-I_D Characteristics (Typical)

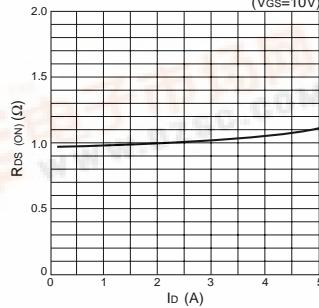


R_{e(yfs)}-I_D Characteristics (Typical)

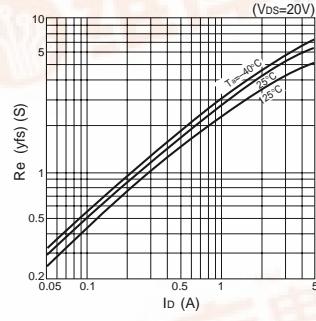


R_{Ds(ON)}-T_c Characteristics (Typical)

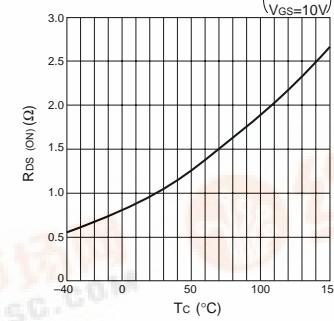


Capacitance-V_{Ds} Characteristics (Typical)

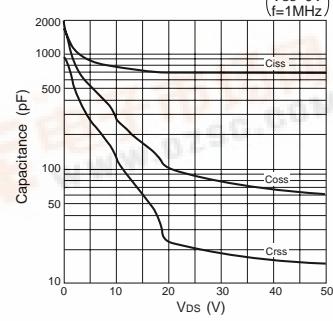

I_{BR}-V_{Ds} Characteristics (Typical)

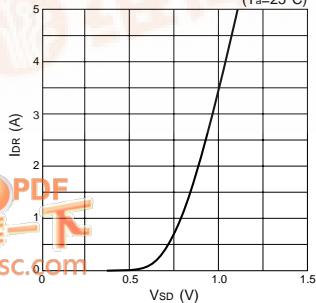

Safe Operating Area (SOA)

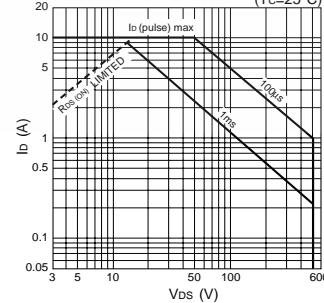

P_T-T_a Characteristics

