


D³PAK Package Outline.


Dimensions in mm (inches)

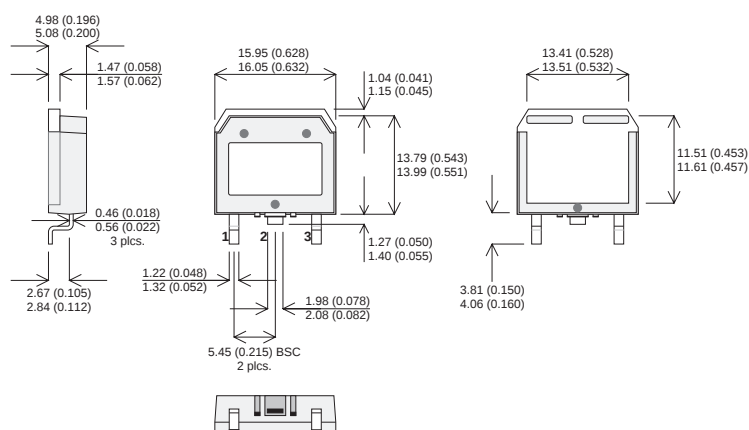

Pin 1 – Gate

Pin 2 – Drain
Heatsink is Drain.

Pin 3 – Source



N-CHANNEL ENHANCEMENT MODE HIGH VOLTAGE POWER MOSFETS

V_{DSS} 1000V
 $I_{D(cont)}$ 13A
 $R_{DS(on)}$ 0.860 Ω

- **Faster Switching**
- **Lower Leakage**
- **100% Avalanche Tested**
- **Surface Mount D³PAK Package**

StarMOS is a new generation of high voltage N-Channel enhancement mode power MOSFETs. This new technology minimises the JFET effect, increases packing density and reduces the on-resistance. StarMOS also achieves faster switching speeds through optimised gate layout.

ABSOLUTE MAXIMUM RATINGS ($T_{case} = 25^{\circ}C$ unless otherwise stated)

V_{DSS}	Drain – Source Voltage	1000	V
I_D	Continuous Drain Current	13	A
I_{DM}	Pulsed Drain Current ¹	52	A
V_{GS}	Gate – Source Voltage	± 30	V
V_{GSM}	Gate – Source Voltage Transient	± 40	
P_D	Total Power Dissipation @ $T_{case} = 25^{\circ}C$	370	W
	Derate Linearly	2.96	W/ $^{\circ}C$
T_J, T_{STG}	Operating and Storage Junction Temperature Range	-55 to 150	$^{\circ}C$
T_L	Lead Temperature : 0.063" from Case for 10 Sec.	300	
I_{AR}	Avalanche Current ¹ (Repetitive and Non-Repetitive)	13	A
E_{AR}	Repetitive Avalanche Energy ¹	30	mJ
E_{AS}	Single Pulse Avalanche Energy ²	1300	

1) Repetitive Rating: Pulse Width limited by maximum junction temperature.

2) Starting $T_J = 25^{\circ}C$, $L = 15.38mH$, $R_G = 25\Omega$, Peak $I_L = 13A$

Semelab plc. Telephone +44(0)1455 556565. Fax +44(0)1455 552612.

E-mail: sales@semelab.co.uk Website: <http://www.semelab.co.uk>

STATIC ELECTRICAL RATINGS ($T_{case} = 25^{\circ}\text{C}$ unless otherwise stated)

	Characteristic	Test Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain – Source Breakdown Voltage	$V_{GS} = 0\text{V}$, $I_D = 250\mu\text{A}$	1000			V
I_{DSS}	Zero Gate Voltage Drain Current ($V_{GS} = 0\text{V}$)	$V_{DS} = V_{DSS}$			25	μA
		$V_{DS} = 0.8V_{DSS}$, $T_C = 125^{\circ}\text{C}$			250	
I_{GSS}	Gate – Source Leakage Current	$V_{GS} = \pm 30\text{V}$, $V_{DS} = 0\text{V}$			± 100	nA
$V_{GS(TH)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}$, $I_D = 1.0\text{mA}$	2		4	V
$I_{D(ON)}$	On State Drain Current ²	$V_{DS} > I_{D(ON)} \times R_{DS(ON)}$ Max $V_{GS} = 10\text{V}$	13			A
$R_{DS(ON)}$	Drain – Source On State Resistance ²	$V_{GS} = 10\text{V}$, $I_D = 0.5 I_D [\text{Cont.}]$			0.86	Ω

DYNAMIC CHARACTERISTICS

	Characteristic	Test Conditions	Min.	Typ.	Max.	Unit
C_{iss}	Input Capacitance	$V_{GS} = 0\text{V}$ $V_{DS} = 25\text{V}$ $f = 1\text{MHz}$		3700		pF
C_{oss}	Output Capacitance			335		
C_{rss}	Reverse Transfer Capacitance			160		
Q_g	Total Gate Charge ³	$V_{GS} = 10\text{V}$ $V_{DD} = 0.5 V_{DSS}$ $I_D = I_D [\text{Cont.}] @ 25^{\circ}\text{C}$		185		nC
Q_{gs}	Gate – Source Charge			16		
Q_{gd}	Gate – Drain (“Miller”) Charge			90		
$t_{d(on)}$	Turn-on Delay Time	$V_{GS} = 15\text{V}$ $V_{DD} = 0.5 V_{DSS}$ $I_D = I_D [\text{Cont.}] @ 25^{\circ}\text{C}$ $R_G = 1.6\Omega$		12		ns
t_r	Rise Time			10		
$t_{d(off)}$	Turn-off Delay Time			43		
t_f	Fall Time			10		

SOURCE – DRAIN DIODE RATINGS AND CHARACTERISTICS

	Characteristic	Test Conditions	Min.	Typ.	Max.	Unit
I_S	Continuous Source Current	(Body Diode)			13	A
I_{SM}	Pulsed Source Current ¹	(Body Diode)			52	
V_{SD}	Diode Forward Voltage ²	$V_{GS} = 0\text{V}$, $I_S = -I_D [\text{Cont.}]$			1.3	V
t_{rr}	Reverse Recovery Time	$I_S = -I_D [\text{Cont.}]$, $dl_S / dt = 100\text{A}/\mu\text{s}$		800		ns
Q_{rr}	Reverse Recovery Charge	$I_S = -I_D [\text{Cont.}]$, $dl_S / dt = 100\text{A}/\mu\text{s}$		11		μC

THERMAL CHARACTERISTICS

	Characteristic	Min.	Typ.	Max.	Unit
$R_{\theta JC}$	Junction to Case			0.34	$^{\circ}\text{C}/\text{W}$
$R_{\theta JA}$	Junction to Ambient			40	

1) Repetitive Rating: Pulse Width limited by maximum junction temperature.

2) Pulse Test: Pulse Width < 380 μs , Duty Cycle < 2%

3) See MIL-STD-750 Method 3471



CAUTION — Electrostatic Sensitive Devices. Anti-Static Procedures Must Be Followed.

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com