

SmartHeat®

**Hand Soldering**

SMT Rework

Desoldering

BGA Rework

CSP Rework

Fume Extraction

Fluid Dispensing

Terms &amp; Conditions

**metcal > products > hand soldering > MX rework systems > SMTC tips****Pad clean-up**


Metcal's blade tip cartridges may be used with desolder braid to clean up the pads for both two and four-sided components regardless of the lead configuration or pitch.

For proper wicking, always use the tip by working with the grain of the pad. Never use a blade to wick by dragging it down the row of pads. The heat combined with the abrasive action may cause the epoxy holding the land to the board to lift the pad.

Choose the size of blade tip that best fits the row of pads. For optimum heat delivery, use the recommended part number below to order.

**BLADE TIP CARTRIDGES**

---

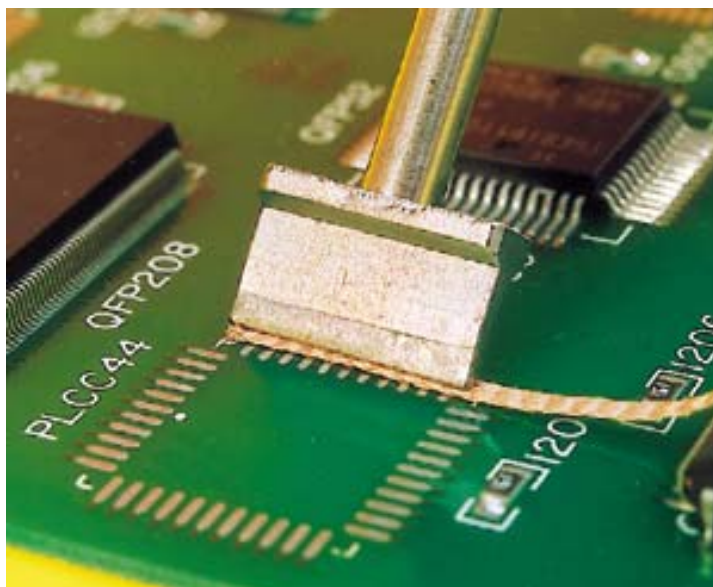

**SMTC-X110\*\***

Blade

Dual Heater Quad

1.55"

**SMTC-X62**

Blade

0.870" (22.10mm)

Long

**SMTC-X61**

Blade

0.620" (15.75mm)

Long

**SMTC-X60**


Blade

0.410" (10.41mm)


Long

500 series x=5 600 series x=0 700 series x=1 800 series x=8


\*\*=NOT available for 500 or 800 series

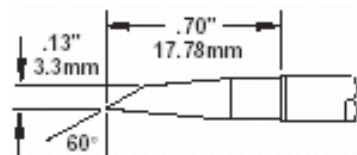**HOOF AND KNIFE TIP CARTRIDGES FOR DRAG SOLDERING****SMTC-X147\***


Hoof

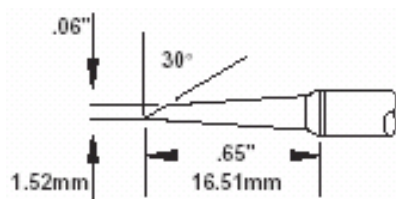**SMTC-X167\*\***

Mini-Hoof

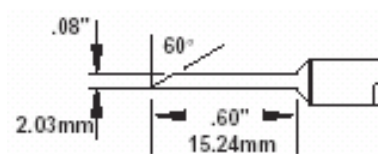
**SMTC-X169\***

Long Reach Hoof

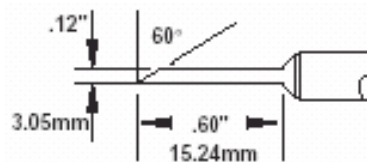

### SMTC-X170\*


Long Reach Hoof

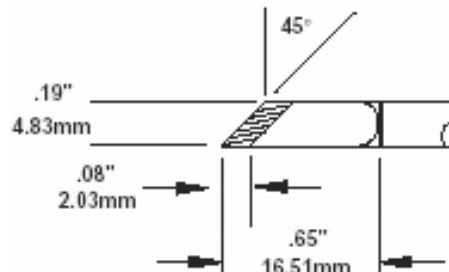

### SMTC-X161\*

Knife

(Tinned Area, .08" 2.03mm)

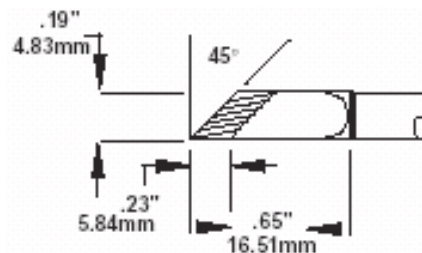

### SMTC-X173


Knife

(Increased Tinned Area,  
.23" 5.84mm)

500 series x=5 600 series x=0 700 series x=1 800 series x=8

\*=NOT available for 800 series \*\*=NOT available for 500 or 800 series


### Other special tip cartridges

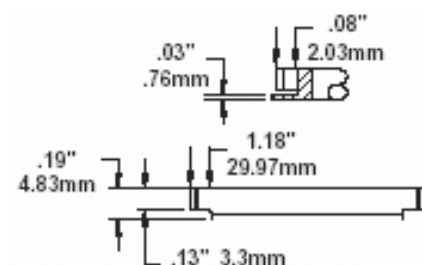

### SMTC-X98\*\*

SMT Connector

28 Pin

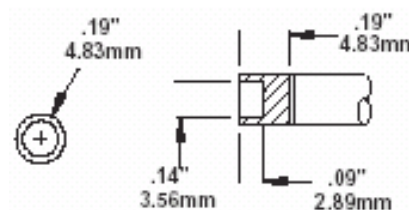


### SMTC-X100

Micro XMT

Small Package

Co-Axial Tip



**SMTC-X136\*\***

Hot Plate

.425" sq. (10.8mm sq.)


500 series x=5 600 series x=0 700 series x=1 800 series x=8

\*\*=NOT available for 500 or 800 series

### Multi-lead speed soldering

Metcal makes special tip cartridges for replacing most component configurations, gull-wing and J-lead, regardless of the number of leads or the lead pitch. We call these multi-lead speed soldering tip cartridges.

For components on boards where access is not a problem, we recommend our SMTC-x147 "hoof" tip cartridge. (This tip cartridge is shaped like a horse's hoof) This tip is designed specifically for "drag soldering" techniques. The face holds just the right amount of solder, and the SMTC-x147 has extra plating where necessary to prevent the failures so commonly seen when using a bent hook to drag solder. Once you have practiced a bit, you will find it is the easiest and fastest way to solder surface mount components.

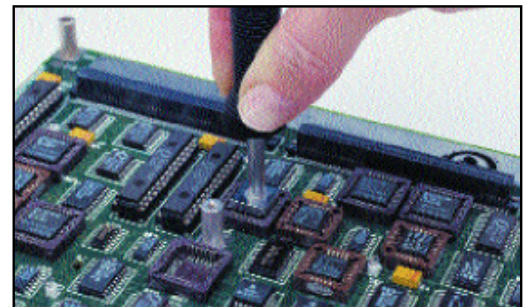


The "knife" tip (SMTC-x161) is designed for multi-lead soldering of PLCC's in tight spaces. The "mini-hoof" (SMTC-x167) is designed for soldering of either PLCC's or QFP's in tight spaces.

See your local Metcal distributor or representative for a demonstration of these easy techniques.



Hoof (SMTC-x147)



Mini-Hoof (SMTC-x167)



Knife (SMTC-x161)

**Please note:** x = 5 for 500 Series; x = 0 for 600 Series; x = 1 for 700 Series.

Note: SMTC rework cartridges are for use with MX-RM3E soldering/rework handpieces for STSS/MX systems only. They cannot be used with SP systems, Talon handpieces, or desolder handpieces.

[Top](#)