
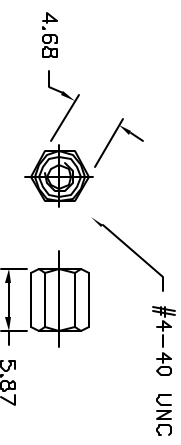

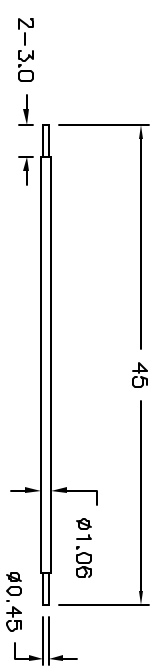
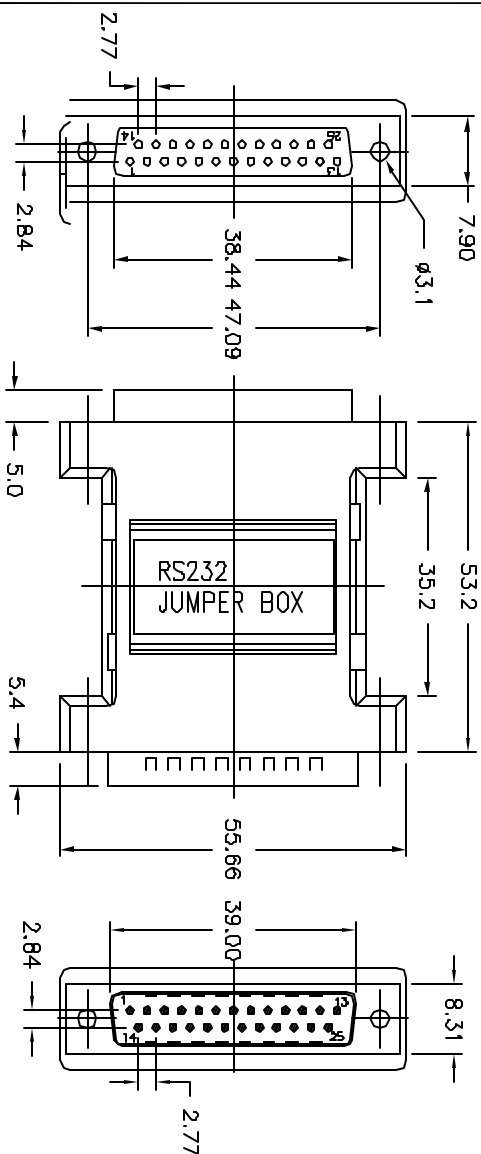


REVISIONS					DOC. NO. SPC-FD03	Effective 7/8/02		DCP No 1308
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1921	A	RELEASED	HO	6/22/04	JN	06/26/08	JN	06/26/08



SPECIFICATION

1 Housing: ABS, Beige Color
Connector:

Terminal= Copper, Gold Flash on contact
Area & Tin-Plated on Solder Area

P.C.B: Fiberglass

Wire: UL1095, 28AWG, Red

JackscREW: Copper, Nickel-Plated

Screw: Copper, Nickel-Plated

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

DRAWN BY: Jason Nash

DATE: 06/26/08

CHECKED BY: Jason Nash

DATE: 06/26/08

APPROVED BY: Jason Nash

DATE: 06/26/08

DRAWING TITLE: Reconfiguration Adapter, Jumper, DB25

SIZE: A DWG. NO. SPC19940 ELECTRONIC FILE 83K3685.DWG REV A

SCALE: NTS U.O.M.: Millimeters SHEET: 1 OF 1