


# REVISIONS


DOC. NO. SPC-F005 \* Effective: 7/8/02 \* DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1906	A	RELEASED	EO	04/17/06	TL	05/25/06	HO	05/25/06

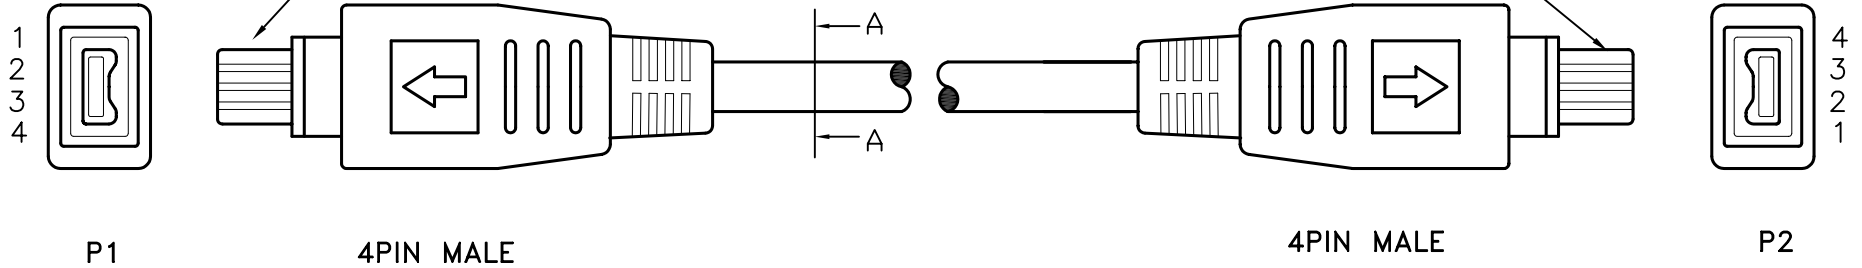

## NOTES:

- CABLE: [30AWG(7/0.103)/1P+AL/MY+SPIRAL(50/0.10)]  
\*2C+FILLER+MY+90%BD(24/5/0.12/)]TIN  
INSULATION WIRE ONE: FO-PE, OD=Ø0.88±0.05MM  
COLOR: RED&GREEN, BLUE&ORANGE  
JACKET: 80°C PVC, OD=Ø4.8±0.15MM  
COLOR: PLATINUM GRAY
- PVC: PLATINUM GRAY
- CONNECTOR: 1394 4P MALE NICKEL-PLATING INSULATOR COLOR BLACK

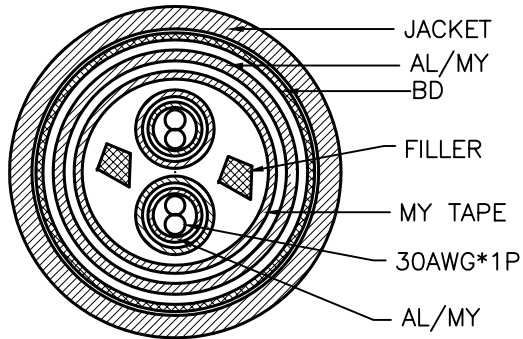

SECTION A-A

SPC TYPE No.	LENGTH
SPC20013	72±1 [1829±25.4]
SPC20011	120±2 [3048±50.8]
SPC20012	180±2 [4572±50.8]

PIN OUTS	
P1 1394-4PINM	P2 1394-4PINM
1	3 RED
2	4 GREEN
3	1 ORANGE
4	2 BLUE
Shell	Shell

DISCLAIMER:  
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:  
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:  
EKLAS ODISH  
CHECKED BY:  
THOMAS LEE  
APPROVED BY:  
HISHAM ODISH  
DATE:  
04/17/06  
DATE:  
05/25/06  
DATE:  
05/25/06

DRAWING TITLE:  
Firewire Cable, Device to Device, 4 pin Male/Male  
SIZE: A  
DWG. NO.: TA-739  
ELECTRONIC FILE: TA-739.DWG  
REV: A  
SCALE: NTS  
U.O.M.: INCHES [mm]  
SHEET: 1 OF 1