


REVISIONS


DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1906	A	RELEASED	EO	04/17/06	TL	05/25/06	HO	05/25/06

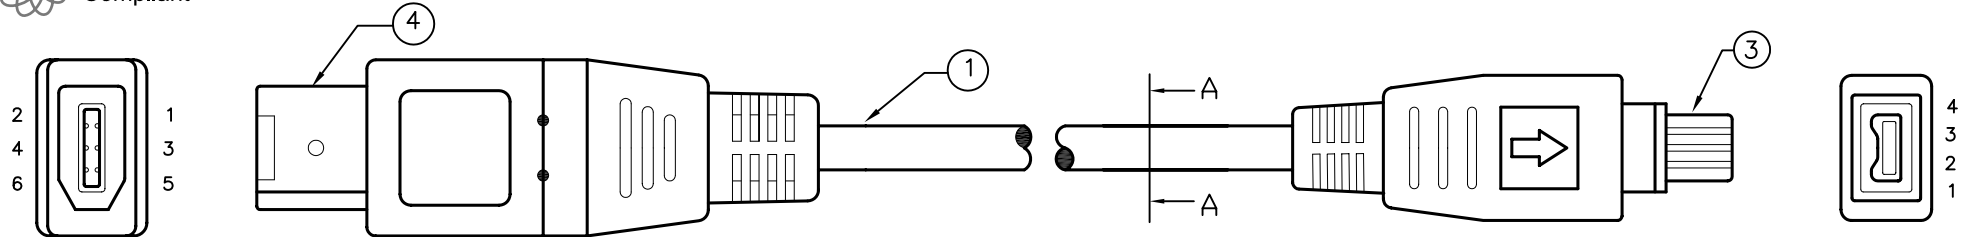

6PIN MALE

4PIN MALE

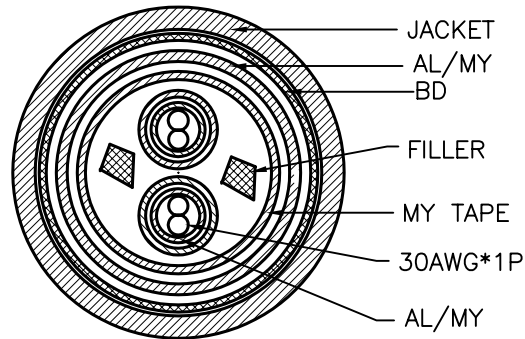

SECTION A-A

SPC TYPE No.	LENGTH
SPC20016	72±1 [1829±25.4]
SPC20014	120±2 [3048±50.8]
SPC20015	180±2 [4572±50.8]

PIN OUTS			
1394-6PIN-MALE		1394-4PIN-MALE	
1	—	3	RED
2	—	4	GREEN
3	—	1	ORANGE
4	—	2	BLUE
5	—		
6	—		
Shell	OUTER BRAID NC	Shell	

NOTES:

- CABLE: [30AWG(7/0.103)/1P+AL/MY+SPIRAL(50/0.10)]
*2C+FILLER+MY+90%BD(24/5/0.12/)]TIN
INSULATION WIRE ONE: FO-PE, OD=ø0.88±0.05MM
COLOR: RED&GREEN, BLUE&ORANGE
JACKET: 80°C PVC, OD=ø4.8±0.15MM
COLOR: PLATINUM GRAY
- PVC: PLATINUM GRAY
- CONNECTOR: 1394 4P MALE NICKEL-PLATING INSULATOR COLOR: BLACK
- CONNECTOR: 1394 6P MALE NICKEL-PLATING INSULATOR COLOR: BLACK

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:

EKLAS ODISH

CHECKED BY:

THOMAS LEE

APPROVED BY:

HISHAM ODISH

DATE:

04/17/06

DATE:

05/25/06

DATE:

05/25/06

DRAWING TITLE:

Firewire Cable, Host to Device, 6 pin/M - 4 pin/M

SIZE

A

SCALE: NTS

U.O.M.: INCHES [mm]

DWG. NO.

TA-740

ELECTRONIC FILE

TA-740.DWG

SHEET: 1 OF 1

REV

A