



# SPS8050

NPN Silicon Transistor

## Features

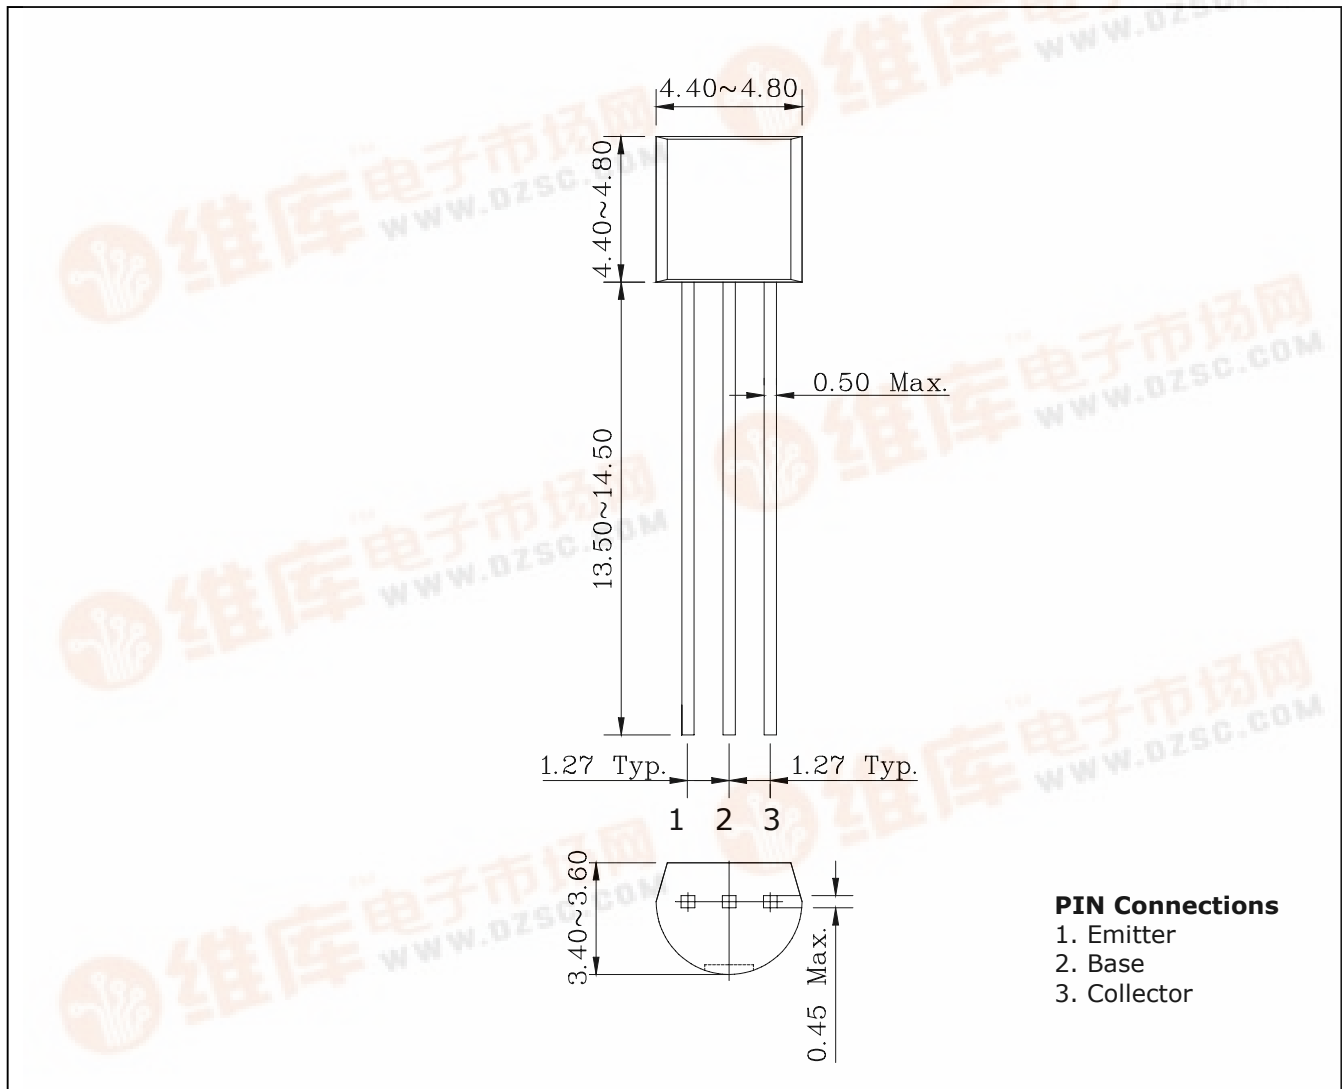
- Low saturation medium current application
- Extremely low collector saturation voltage
- Suitable for low voltage large current drivers
- High DC current gain and large current capability
- Low on resistance :  $R_{ON}=0.6\Omega(\text{Max.})$  ( $I_B=1\text{mA}$ )

## Ordering Information

Type NO.	Marking	Package Code
SPS8050	SPS8050	TO-92

## Outline Dimensions

unit : mm



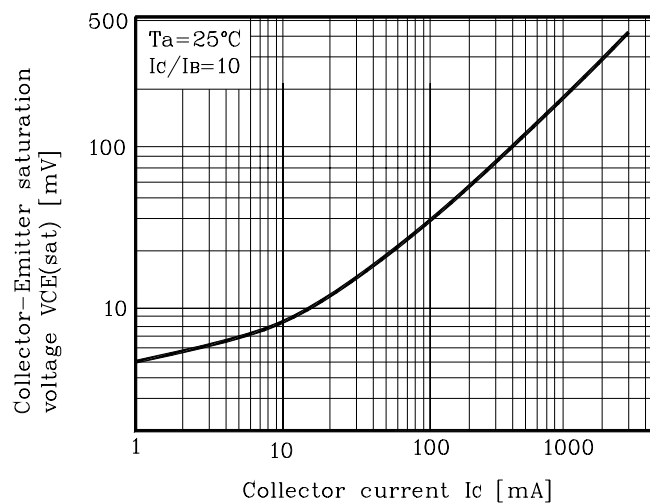
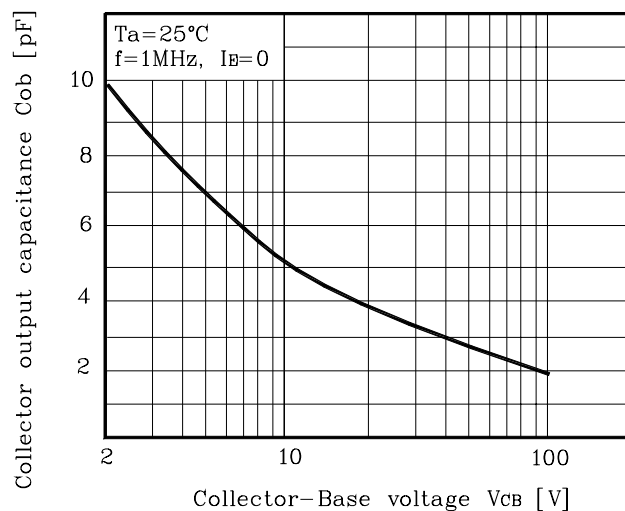
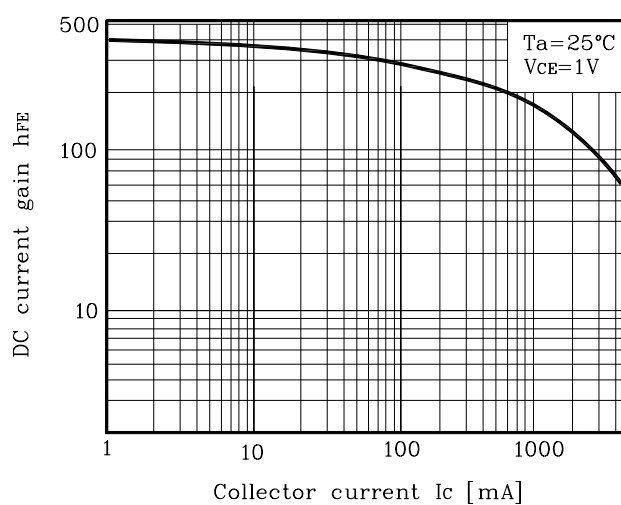
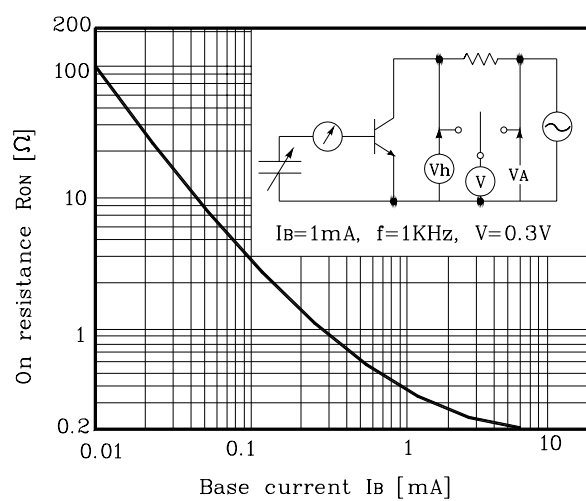
**Absolute maximum ratings**

Characteristic	Symbol	Ratings	Unit
Collector-Base voltage	$V_{CBO}$	15	V
Collector-Emitter voltage	$V_{CEO}$	12	V
Emitter-base voltage	$V_{EBO}$	6.5	V
Collector current	$I_C$	1.5	A
Collector dissipation	$P_C$	625	mW
Junction temperature	$T_J$	150	°C
Storage temperature	$T_{stg}$	-55~150	°C

**Electrical Characteristics**

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-base breakdown voltage	$BV_{CBO}$	$I_C=50\mu A, I_E=0$	15	-	-	V
Collector-Emitter breakdown voltage	$BV_{CEO}$	$I_C=1mA, I_B=0$	12	-	-	V
Emitter-base breakdown voltage	$BV_{EBO}$	$I_E=50\mu A, I_C=0$	6.5	-	-	V
Collector cut-off current	$I_{CBO}$	$V_{CB}=15V, I_E=0$	-	-	0.1	$\mu A$
Emitter cut-off current	$I_{EBO}$	$V_{EB}=6V, I_C=0$	-	-	0.1	$\mu A$
DC current gain	$h_{FE}$	$V_{CE}=1V, I_C=100mA$	200	-	450	-
Collector-Emitter saturation voltage	$V_{CE(sat)}$	$I_C=800mA, I_B=80mA$	-	-	0.5	V
Transistor frequency	$f_T$	$V_{CE}=5V, I_C=50mA$	-	260	-	MHz
Collector output capacitance	$C_{ob}$	$V_{CB}=10V, I_E=0, f=1MHz$	-	5	-	pF
On resistance	$R_{ON}$	$f=1KHz, I_B=1mA, V_{IN}=0.3V$	-	0.6	-	$\Omega$

## Electrical Characteristic Curves

Fig. 1  $V_{CE(sat)}-I_C$ Fig. 1  $C_{ob}-V_{CB}$ Fig. 3  $h_{FE}-I_C$ Fig. 4  $R_{ON}-I_B$ 

**These AUK Corp. products are intended for usage in general electronic equipment (Office and communication equipment, measuring equipment, domestic electrification, etc.) Please make sure that you consult with us before you use these AUK products in equipments which require high quality and/or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, traffic signal, combustion central, all types of safety device, etc.) AUK cannot accept liability to any damage which may occur in case these AUK products were used in the mentioned equipments without prior consultation with AUK.**