

TRANSISTOR MODULE

SQD200A40/60



UL;E76102 (M)

SQD200A is a Darlington power transistor module which a high speed, high power Darlington transistor. The transistor has a reverse paralled fast recovery diode. The mounting base of the module is electrically isolated from semiconductor elements for simple heatsink construction,

- $I_C=200A$, $V_{CEX}=400/600V$
- Low saturation voltage for higher efficiency.
- High DC current gain h_{FE}
- Isolated mounting base
- V_{EBO} 10V for faster switching speed.

(Applications)

Motor Control (VVVF), AC/DC Servo, UPS, Switching Power Supply, Ultrasonic Application

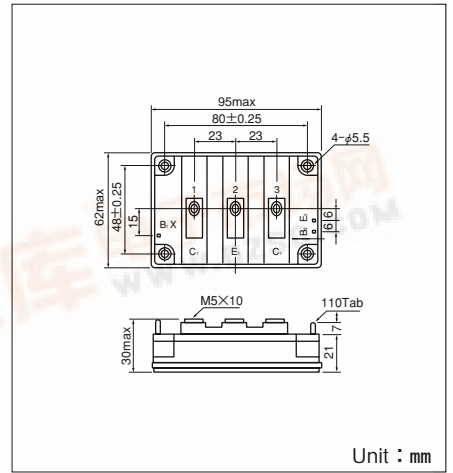

Maximum Ratings

($T_j=25^\circ C$ unless otherwise specified)

Symbol	Item	Conditions	Ratings		Unit
			SQD200A40	SQD200A60	
V_{CBO}	Collector-Base Voltage		400	600	V
V_{CEX}	Collector-Emitter Voltage	$V_{BE}=-2V$	400	600	V
V_{EBO}	Emitter-Base Voltage		10		V
I_C	Collector Current	() =pw≤1ms	200 (400)		A
$-I_C$	Reverse Collector Current		200		A
I_B	Base Current		12		A
P_T	Total power dissipation	$T_C=25^\circ C$	1250		W
T_j	Junction Temperature		-40 to +150		$^\circ C$
T_{stg}	Storage Temperature		-40 to +125		$^\circ C$
V_{iso}	Isolation Voltage	A.C.1minute	2500		V
	Mounting Torque	(M5)	Recommended Value 1.5-2.5 (15-25)		N·m (kgf·cm)
		Terminal (M5)	Recommended Value 1.5-2.5 (15-25)		
	Mass	Typical Value	380		g

Electrical Characteristics

Symbol	Item	Conditions	Ratings		Unit
			Min.	Max.	
I_{CBO}	Collector Cut-off Current	$V_{CB}=V_{CBO}$		2.0	mA
I_{EBO}	Emitter Cut-off Current	$V_{EB}=V_{EBO}$		800	mA
$V_{CEO(SUS)}$	Collector Emitter Sustaning Voltage	SQD200A40	300		V
		SQD200A60			
$V_{CEX(SUS)}$	Collector Emitter Sustaning Voltage	SQD200A40	400		V
		SQD200A60			
h_{FE}	DC Current Gain	$I_C=200A$, $V_{CE}=2V$	75		
		$I_C=200A$, $V_{CE}=5V$	100		
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=200A$, $I_B=2.7A$		2.0	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C=200A$, $I_B=2.7A$		2.5	V
t_{on}	Switching Time	On Time		2.0	μs
t_s		Storage Time	$V_{CC}=300V$, $I_C=200A$ $I_{B1}=4A$, $I_{B2}=-4A$	12.0	
t_f		Fall Time		3.0	
V_{ECO}	Collector-Emitter Reverse Voltage	$-I_C=200A$		1.4	V
$\theta_{th(j-c)}$	Thermal Impedance (junction to case)	Transistor part		0.1	$^\circ C/W$
		Diode part		0.3	



SQD200A40/60

