




SR32 THRU SR39

MINI SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER
VOLTAGE - 20 to 90 Volts CURRENT - 3.0 Amperes

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications
- Low profile package
- Butt-in strain relief
- Metal to silicon rectifier majority carrier conduction
- Low power loss, High efficiency
- High current capability, low V_F
- High surge capacity
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed: 260 °C/10 seconds at terminals

SMB/DO-214AA

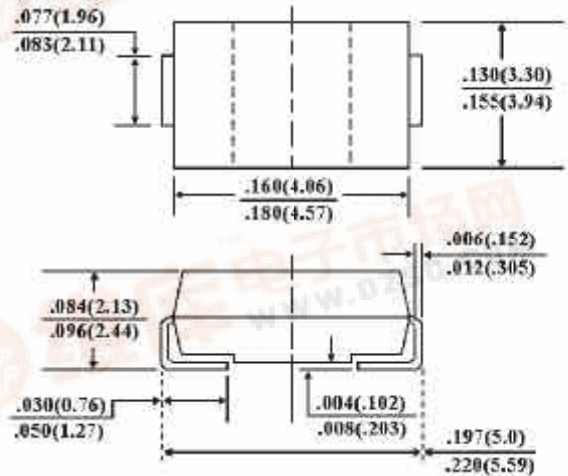

Dimensions in inches and (millimeters)

MECHANICAL DATA

- Case: JEDEC DO-214AA molded plastic
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode
- Standard packaging: 12mm tape (EIA-481)
- Weight: 0.003 ounce, 0.093 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.

Resistive or inductive load.

	SYMBOLS	SR32	SR33	SR34	SR35	SR36	SR38	SR39	UNITS	
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	80	90	Volts	
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	56	64	Volts	
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	80	90	Volts	
Maximum Average Forward Rectified Current at T_L (See Figure 1)	$I_{(AV)}$	3.0							Amps	
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	I_{FSM}	80							Amps	
Maximum Instantaneous Forward Voltage at 3.0A (Note 1)	V_F	0.50			0.70		0.85		Volts	
Maximum DC Reverse Current $T_A=25$ °C(Note 1) At Rated DC Blocking Voltage $T_A=100$ °C	I_R					0.5		20.0		mA
Maximum Thermal Resistance (Note 2)	$R_{\theta KJL}$ $R_{\theta KJA}$					17		55		°C/W
Operating Junction Temperature Range	T_J					-50 to +125			°C	
Storage Temperature Range	T_{STG}					-50 to +150			°C	

NOTES:

1. Pulse Test with $PW=300$ µsec, 2% Duty Cycle.
2. Mounted on P.C.Board with 5.0mm^2 (.013mm thick) copper pad areas.



RATING AND CHARACTERISTIC CURVES
SR32 THRU SR39

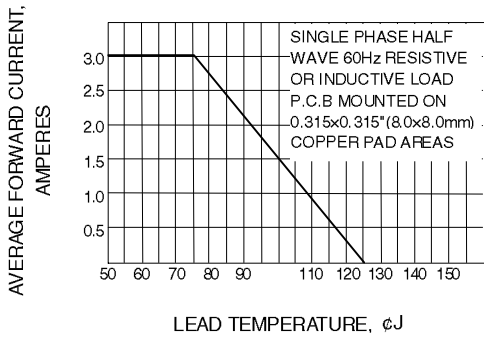


Fig. 1-FORWARD CURRENT DERATING CURVE

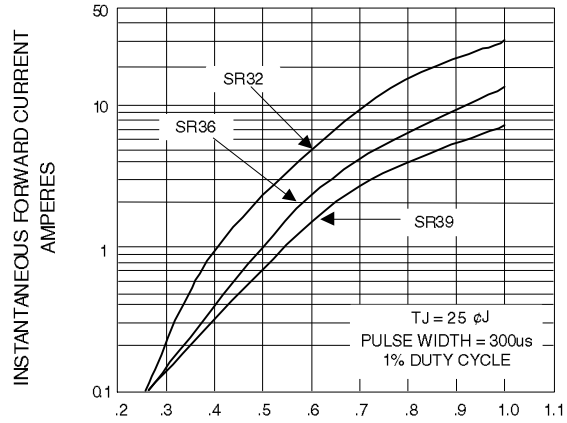


Fig. 2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

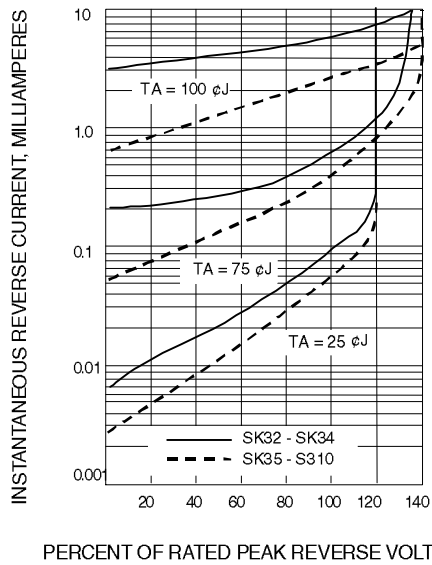


Fig. 3-TYPICAL REVERSE CHARACTERISTICS

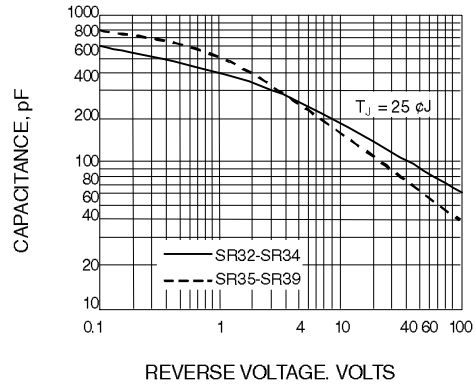


Fig. 4-TYPICAL JUNCTION CAPACITANCE

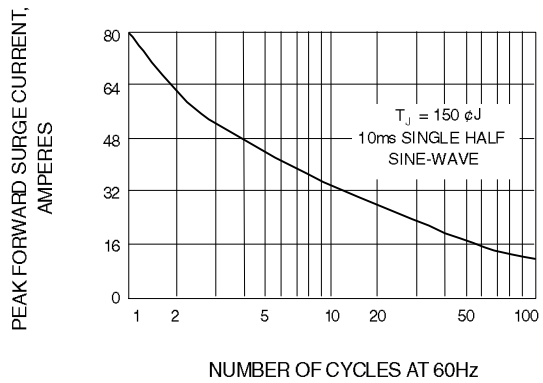


Fig. 5-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT