



SR52 thru SR56


**Surface Mount
Schottky Barrier Rectifiers**

Using the Schottky Barrier principle with a Molybdenum barrier metal. These state-of-the-art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for low voltage, high frequency rectification, or as free wheeling and polarity protection diodes, in surface mount applications where compact size and weight are critical to the system.

- * Low Forward Voltag.
- * Low Switching noise.
- * High Current Capacity
- * Guarantee Reverse Avalance.
- * Guard-Ring for Stress Protection.
- * Low Power Loss & High efficiency.
- * 125 °C Operating Junction Temperature
- * Low Stored Charge Majority Carrier Conduction.
- * Plastic Material used Carries Underwriters Laboratory Flammability Classification 94V-O

**SCHOTTKY BARRIER
RECTIFIERS**


**5.0 AMPERES
20-60 VOLTS**



DO-214AA(SMB)

MAXIMUM RATINGS

Characteristic	Symbol	SR52	SR53	SR54	SR55	SR56	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	20	30	40	50	60	V
RMS Reverse Voltage	$V_{R(RMS)}$	14	21	28	35	42	V
Average Rectifier Forward Current	I_o	5.0					A
Non-Repetitive Peak Surge Current (Surge applied at rate load conditions halfware, single phase, 60Hz)	I_{FSM}	100					A
Operating and Storage Junction Temperature Range	T_J, T_{stg}	- 65 to + 125					°C



DIM	MILLIMETERS	
	MIN	MAX
A	3.30	3.90
B	4.20	4.60
C	1.80	2.20
D	4.90	5.60
E	1.90	2.50
F	---	1.30
G	---	0.22
H	0.85	1.45

ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	SR52	SR53	SR54	SR55	SR56	Unit
Maximum Instantaneous Forward Voltage ($I_F = 5$ Amp) ($I_F = 15$ Amp)	V_F		0.550 0.850		0.650 0.950		V
Maximum Instantaneous Reverse Current (Rated DC Voltage, $T_c = 25$ °C) (Rated DC Voltage, $T_c = 100$ °C)	I_R			5.0 60			mA
Typical Junction Capacitance (Reverse Voltage of 4 volts & f=1 MHz)	C_p		340		320		pF

CASE---
Transfer molded plastic

POLARITY---
Cathode indicated polarity band



SR52 thru SR54

FIG-1 FORWARD CURRENT DERATING CURVE

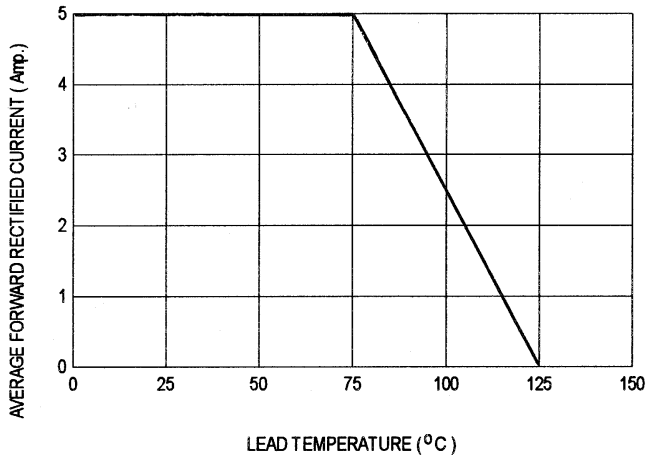


FIG-2 TYPICAL FORWARD CHARACTERISTICS

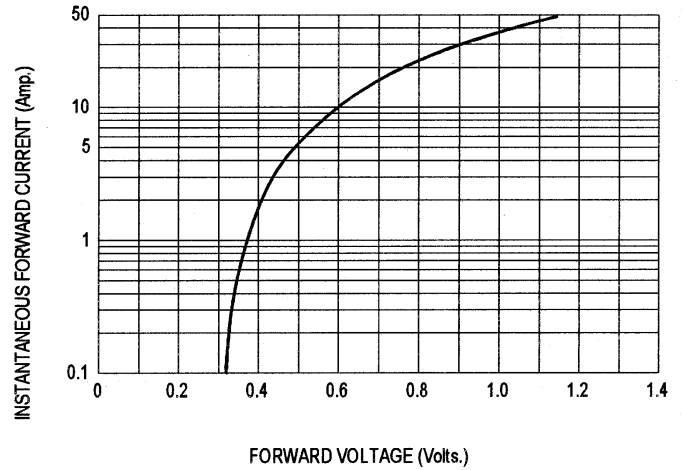


FIG-3 TYPICAL REVERSE CHARACTERISTICS

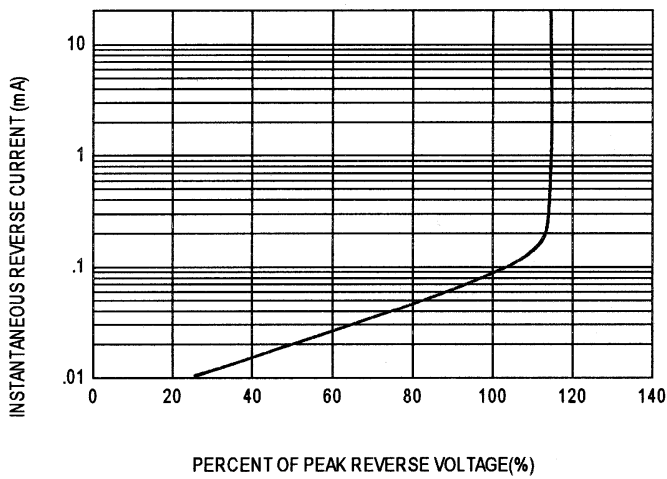


FIG-4 TYPICAL JUNCTION CAPACITANCE


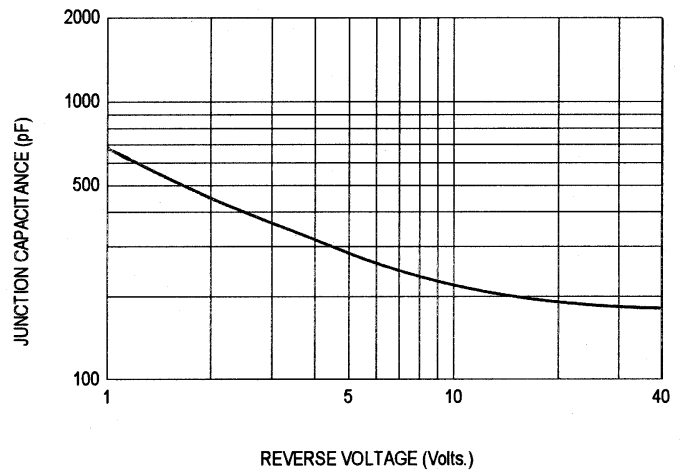


FIG-5 PEAK FORWARD SURGE CURRENT

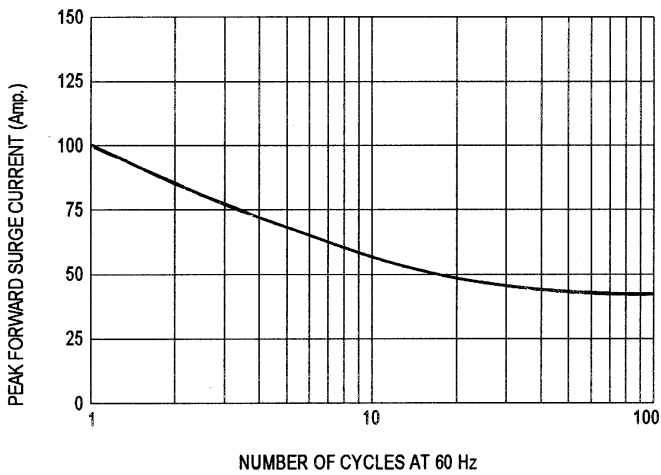

SR55 , SR56

FIG-1 FORWARD CURRENT DERATING CURVE

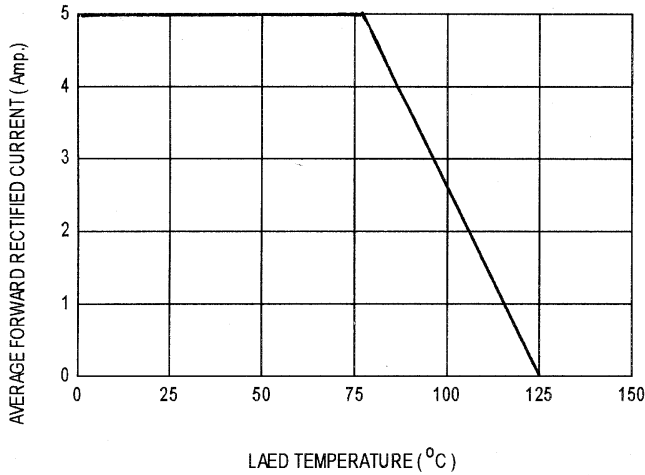


FIG-2 TYPICAL FORWARD CHARACTERISTICS

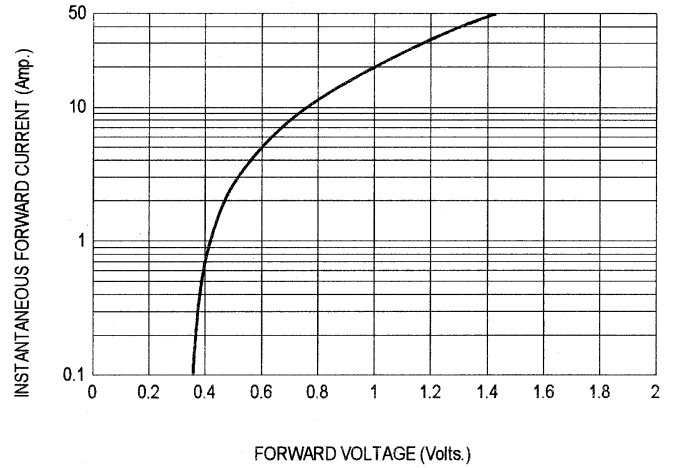


FIG-3 TYPICAL REVERSE CHARACTERISTICS

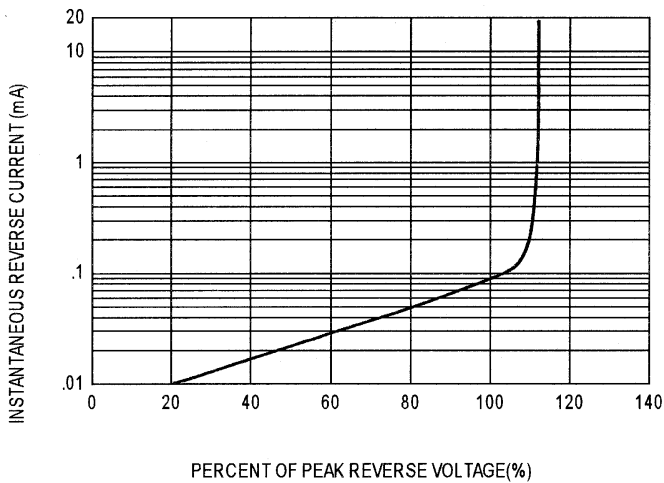


FIG-4 TYPICAL JUNCTION CAPACITANCE

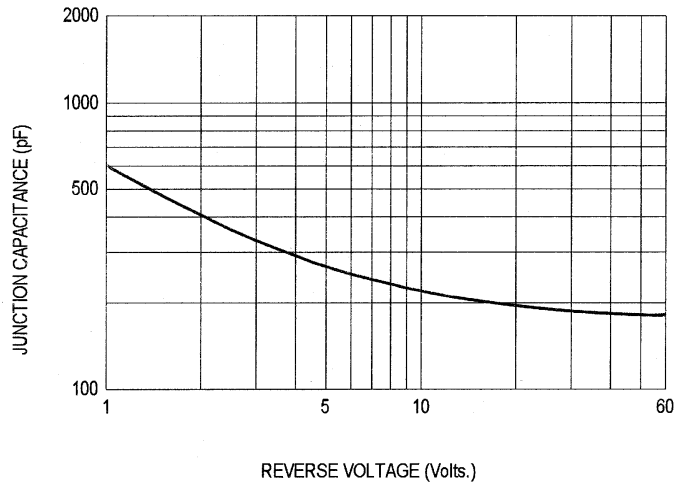


FIG-5 PEAK FORWARD SURGE CURRENT

