


TEMPERATURE RANGE	-40°C	0°C	25°	85°C	125°C	150°C
OPERATE GAUSS MAXIMUM	200	185	180	180	180	185
OPERATING GAUSS MINIMUM	100	100	100	95	80	70
RELEASE GAUSS MAXIMUM	-100	-100	-100	-95	-80	-70
RELEASE GAUSS MINIMUM	-200	-185	-180	-180	-180	-185

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
SUPPLY VOLTAGE	VCC		3.8		24	V
SUPPLY CURRENT	ICC	B > 180 G, VCC=24, ISINK=20 MA -40 C < T < 150C			10	MA
OUTPUT SATURATION VOLTAGE	VOL	B > 180G, VCC=3.8V, ISINK=20 MA			.4	V
OUTPUT LEAKAGE CURRENT	I _{OFF}	B < -180G, V _{OUT} =24V, VCC=24V			10.0	μA
RISE TIME	TR	VCC=12V, RL=1.6K, CL=20PF		.05	1.5	μSEC
FALL TIME	TF	VCC=12V, RL=1.6K, CL=20PF		.15	1.5	μSEC

CHARACTERISTIC	SYMBOL	MIN	MAX	UNITS
POWER SUPPLY	VCC	-1	25	VOLTS
OUTPUT VOLTAGE (OFF)	V _{OUT}		25	VOLTS
OUTPUT ON CURRENT	I _{SINK}		50	MA
OPERATING TEMPERATURE	T	-50	160	°C
STORAGE TEMPERATURE	T _S	-65	160	°C
MAGNETIC FLUX	NO LIMIT			

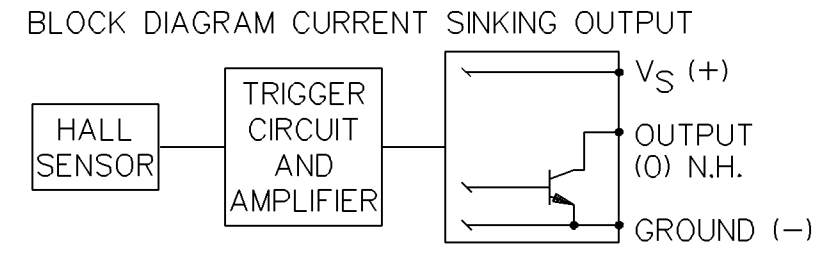

- NOTES
- THE MAGNETIC FLUX USED TO OPERATE THE SWITCH MUST BE IN THE DIRECTION AND LOCATION SHOWN (THIS ASSUMES THE CONVENTION THAT THE DIRECTION OF THE EXTERNAL FLUX OF A MAGNET IS FROM THE NORTH TO THE SOUTH POLE OF THE MAGNET)
 - THE MAGNETIC FIELD STRENGTH (GAUSS) REQUIRED TO CAUSE THE SWITCH TO CHANGE STATE (OPERATE AND RELEASE) WILL BE AS SPECIFIED IN THE MAGNETIC CHARACTERISTICS. TO TEST THE SWITCH AGAINST THE SPECIFIED MAGNETIC CHARACTERISTICS, THE SWITCH MUST BE PLACED IN A UNIFORM MAGNETIC FIELD
 - ABSOLUTE MAXIMUM RATINGS ARE THE EXTREME LIMITS THAT THE DEVICE WILL WITHSTAND WITHOUT DAMAGE TO THE DEVICE. HOWEVER, THE ELECTRICAL AND MAGNETIC CHARACTERISTICS ARE NOT GUARANTEED AS THE MAXIMUM LIMITS (ABOVE RECOMMENDED OPERATING CONDITIONS) ARE APPROACHED, NOR WILL THE DEVICE NECESSARILY OPERATE AT ABSOLUTE MAXIMUM RATING
 - ABSOLUTE MAXIMUM RATINGS ARE DUE TO TIE BAR REMOVAL OPERATION AND ARE VALID ONLY IN TIE BAR AREA LOCATED WITHIN .080 DIMENSION
 - HALL ELEMENT LOCATION WITH INTEGRATED CIRCUIT PLACEMENT TOLERANCE LEADS MUST BE ADEQUATELY SUPPORTED DURING ANY FORMING/SHEARING OPERATION TO ENSURE THAT THE LEADS ARE NOT STRESSED INSIDE THE PLASTIC
 - PCB WAVE SOLDERING GUIDELINES ARE AS FOLLOWS:
 250° TO 260° C SOLDERING TEMPERATURE
 3 SECONDS MAXIMUM SOLDERING TIME

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929

MICRO SWITCH
a Honeywell Division

SOLID STATE SWITCH

CATALOG LISTING
SS466A

THIRD ANGLE PROJECTION	
SCALE 5 : 1	
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE (.0)	±.030
TWO PLACES (.00)	±.015
THREE PLACES (.000)	±.005
ANGLES	±
WEIGHT	

SS466A

REPLACES X92536-SS

PR-18408

ISSUE 1

REVISIONS

DATE

DESCRIPTION

DRWN

K A G 12 JUN 90