


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

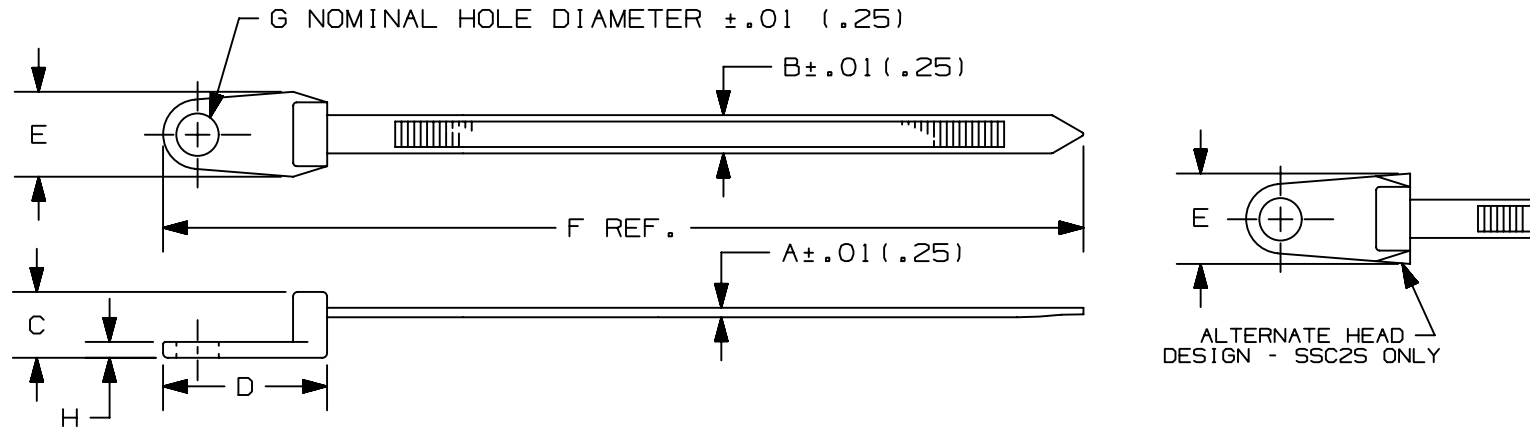

| PANDUIT PART NO.* | BUNDLE DIA. | | A in (mm) | B in (mm) | C in (mm) | D in (mm) | E in (mm) | F in (mm) | G in (mm) | H in (mm) | MIN. LOOP TENSILE lbs. (N) | CROSS-SECTION | RECM. FAST. | WEIGHT lbs./100pcs. (g) |
|-------------------|--------------|--------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|----------------------------|---------------|----------------|-------------------------|
| | MIN. in (mm) | MAX. in (mm) | | | | | | | | | | | | |
| SSC2S-S10 | .06 (1.5) | 1.75 (44) | .045 (1.1) | .180 (4.6) | .310 (7.9) | .772 (19.6) | .430 (10.9) | 7.35 (187) | .200 (5.1) | .075 (1.9) | 50 (222) | STANDARD | #10 (M5) SCREW | .3 (136) |
| SSC2S-S6 | .06 (1.5) | 1.75 (44) | .045 (1.1) | .180 (4.6) | .310 (7.9) | .772 (19.6) | .430 (10.9) | 7.35 (187) | .148 (3.8) | .075 (1.9) | 50 (222) | STANDARD | #6 (M3) SCREW | .3 (136) |
| SSC4S-S10 | .06 (1.5) | 4.00 (102) | .045 (1.1) | .180 (4.6) | .310 (7.9) | .772 (19.6) | .400 (10.2) | 15.67 (398) | .200 (5.1) | .075 (1.9) | 50 (222) | STANDARD | #10 (M5) SCREW | .5 (227) |
| SSC4S-S6 | .06 (1.5) | 4.00 (102) | .045 (1.1) | .180 (4.6) | .310 (7.9) | .772 (19.6) | .400 (10.2) | 15.67 (398) | .148 (3.8) | .075 (1.9) | 50 (222) | STANDARD | #6 (M3) SCREW | .5 (227) |
| SSC4H-S25 | .06 (1.5) | 4.00 (102) | .065 (1.7) | .300 (7.6) | .460 (11.7) | .930 (23.6) | .530 (13.5) | 15.55 (395) | .260 (6.6) | .110 (2.8) | 120 (534) | HEAVY | 1/4 (M6) SCREW | 1.3 (590) |

NOTES:

- *1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.
- 2) RECOGNIZED UNDER THE COMPONENT PROGRAM OF UNDERWRITERS LABORATORIES INC.

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS.

PANDUIT CORP. TINLEY PARK, ILLINOIS

STA-STRAP CLAMP CABLE TIES
SSC SERIES

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ± .0005 (XXX) ± .020 (.51)
(.XX) ± .02 (.5) ANGLES ± .0005

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

| REV | DATE | BY | CHK | DESCRIPTION | ECN | R | CUST | SUP | DRAWN BY | MAT'L | SCALE | DRAWING NO. | DWG SIZE |
|-----|---------|-----|-----|---|-----|----|------|-----|----------|-----------|-------|-------------|----------|
| -- | ----- | --- | | CHANGED MAX. BUNDLE DIA. METRIC NUMBERS TO WHOLE NUMBERS | --- | -- | | | JABO | | NONE | | |
| 20 | 5/31/05 | ERW | | CHANGED 'G' DIMENSION FROM A TOLERANCE TO A NOMINAL HOLE DIAMETER | 600 | 20 | | | 1/8/02 | NYLON 6.6 | | SS-600 | A |
| | | | | | | | | | JVL | | | | |