



P-Channel JFETs

J270 **SST270**
J271 **SST271**

PRODUCT SUMMARY				
Part Number	V _{GS(off)} (V)	V _{(BR)GSS} Min (V)	g _{fs} Min (mS)	I _{DSS} Min (mA)
J/SST270	0.5 to 2.0	30	6	-2
J/SST271	1.5 to 4.5	30	8	-6

FEATURES

- Low Cutoff Voltage: J270 <2 V
- High Input Impedance
- Very Low Noise
- High Gain

BENEFITS

- Full Performance from Low-Voltage Power Supply: Down to 2 V
- Low Signal Loss/System Error
- High System Sensitivity
- High-Quality, Low-Level Signal Amplification

APPLICATIONS


- High-Gain, Low-Noise Amplifiers
- Low-Current, Low-Voltage Battery Amplifiers
- Ultrahigh Input Impedance Pre-Amplifiers
- High-Side Switching

DESCRIPTION


The J/SST270 series consists of all-purpose amplifiers for designs requiring p-channel operation.

The TO-226AA (TO-92) plastic package provides a low-cost option, while the TO-236 (SOT-23) package

provides surface-mount capability. Both the J and SST series are available in tape-and-reel for automated assembly (see Packaging Information).

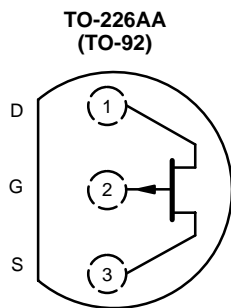

Top View
J270
J271

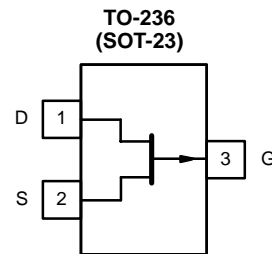

Top View
SST270 (S0)*
SST271 (S1)*
*Marking Code for TO-236

ABSOLUTE MAXIMUM RATINGS

Gate-Drain Voltage	30 V
Gate-Source Voltage	30 V
Gate Current	-50 mA
Storage Temperature	-55 to 150°C
Operating Junction Temperature	-55 to 150°C

Lead Temperature (¹ / ₁₆ " from case for 10 sec.)	300°C
Power Dissipation ^a	350 mW

Notes
a. Derate 2.8 mW/°C above 25°C



SPECIFICATIONS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)



Parameter	Symbol	Test Conditions	Typ ^a	Limits				Unit
				J/SST270		J/SST271		
				Min	Max	Min	Max	
Static								
Gate-Source Breakdown Voltage	$V_{(BR)GSS}$	$I_G = 1\ \mu\text{A}$, $V_{DS} = 0\ \text{V}$	45	30		30		V
Gate-Source Cutoff Voltage	$V_{GS(off)}$	$V_{DS} = -15\ \text{V}$, $I_D = -1\ \text{nA}$		0.5	2.0	1.5	4.5	V
Saturation Drain Current ^b	I_{DSS}	$V_{DS} = -15\ \text{V}$, $V_{GS} = 0\ \text{V}$		-2	-15	-6	-50	mA
Gate Reverse Current	I_{GSS}	$V_{GS} = 20\ \text{V}$, $V_{DS} = 0\ \text{V}$	10		200		200	pA
		$T_A = 125^\circ\text{C}$	5					nA
Gate Operating Current	I_G	$V_{DG} = -15\ \text{V}$, $I_D = -1\ \text{mA}$	10					pA
Drain Cutoff Current	$I_{D(off)}$	$V_{DS} = -15\ \text{V}$, $V_{GS} = 10\ \text{V}$	-10					pA
Gate-Source Forward Voltage	$V_{GS(F)}$	$I_G = -1\ \text{mA}$, $V_{DS} = 0\ \text{V}$	-0.7					V
Dynamic								
Common-Source Forward Transconductance	g_{fs}	$V_{DS} = -15\ \text{V}$, $V_{GS} = 0\ \text{V}$ $f = 1\ \text{kHz}$		6	15	8	18	mS
Common-Source Output Conductance	g_{os}					200		500
Common-Source Input Capacitance	C_{iss}	$V_{DS} = -15\ \text{V}$, $V_{GS} = 0\ \text{V}$ $f = 1\ \text{MHz}$	20					pF
Common-Source Reverse Transfer Capacitance	C_{rss}		4					
Equivalent Input Noise Voltage	\bar{e}_n	$V_{DG} = -10\ \text{V}$, $V_{GS} = 0\ \text{V}$ $f = 1\ \text{kHz}$	20					nV/ $\sqrt{\text{Hz}}$

Notes

- a. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
- b. Pulse test: $PW \leq 300\ \mu\text{s}$ duty cycle $\leq 3\%$.







PSCIA

TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)





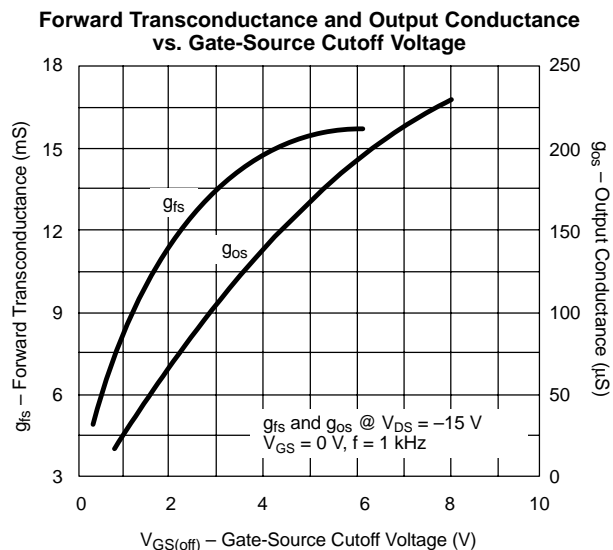
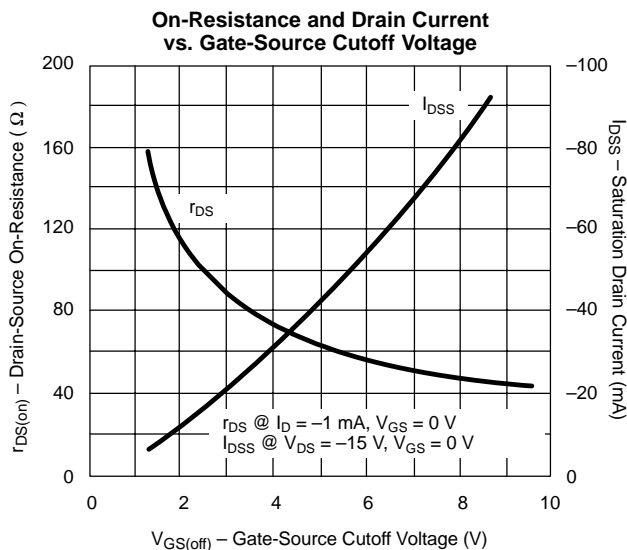




TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

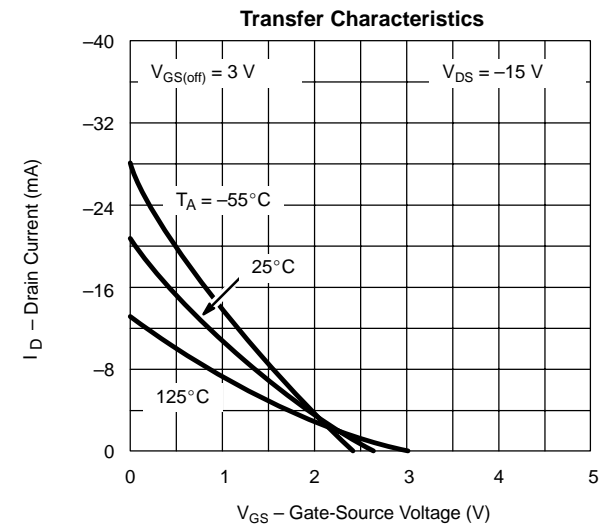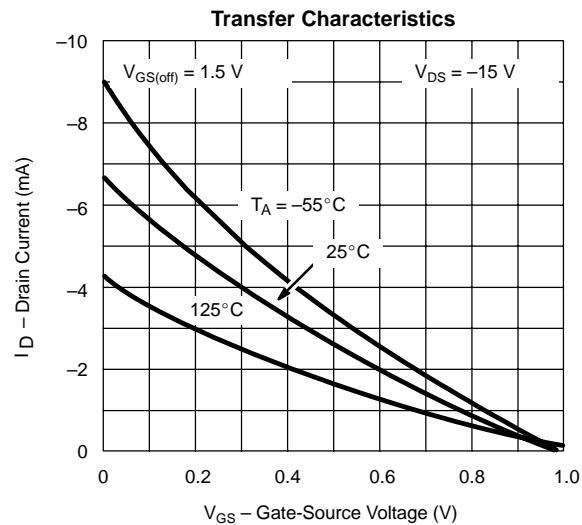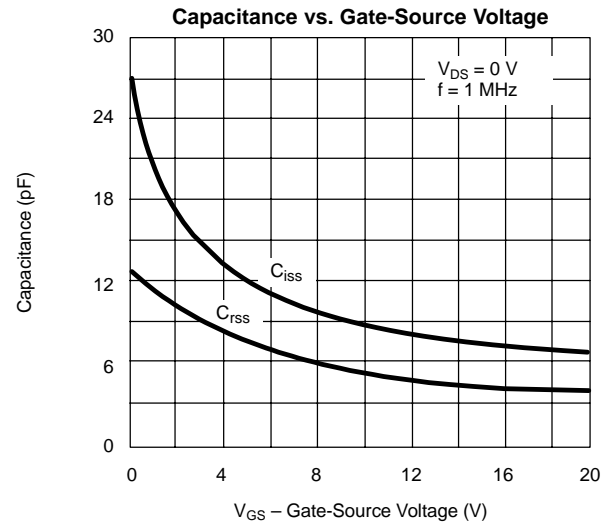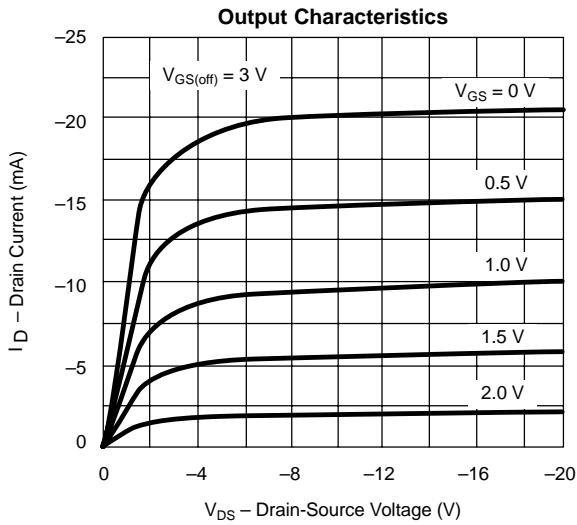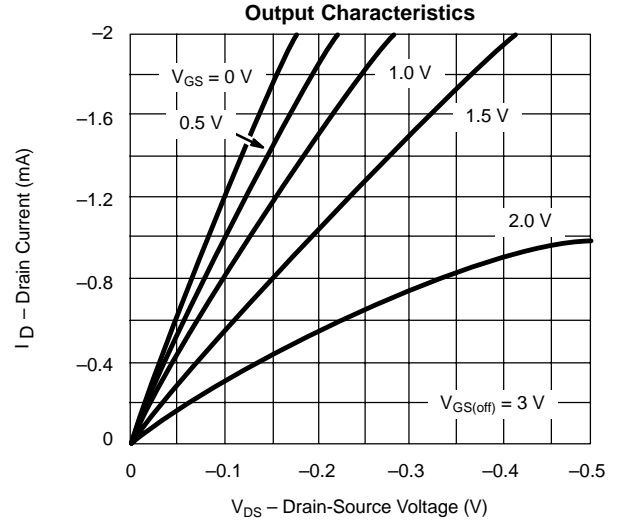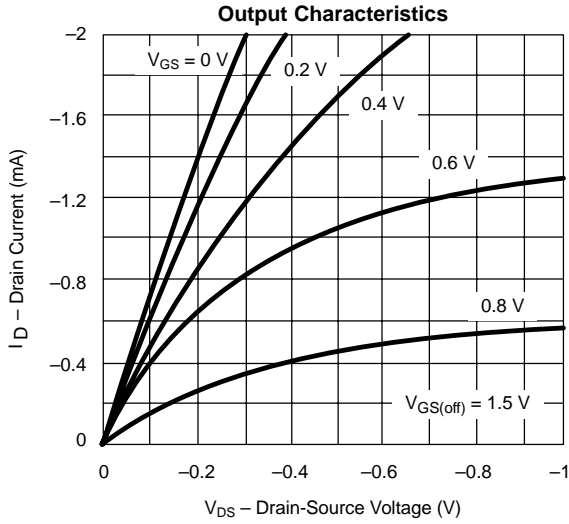

TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

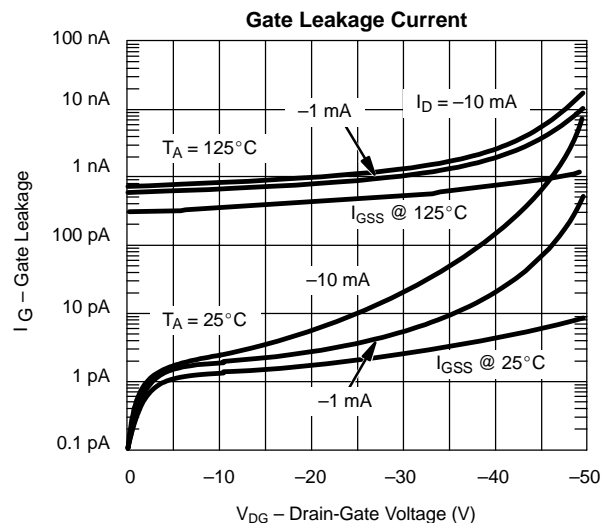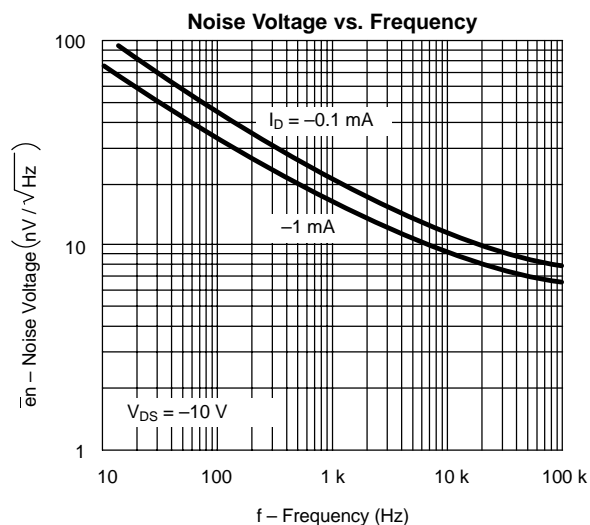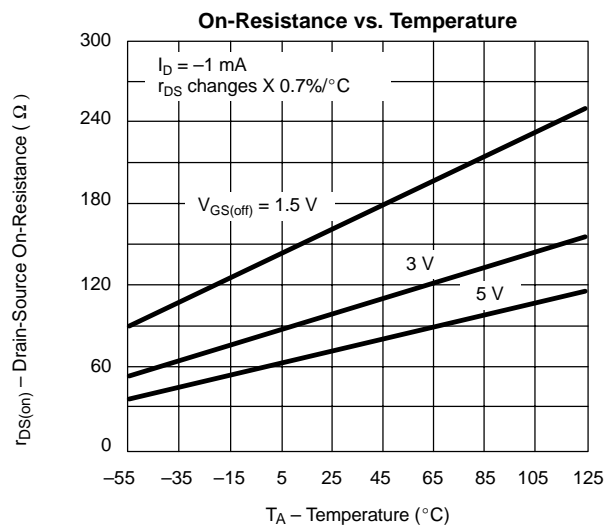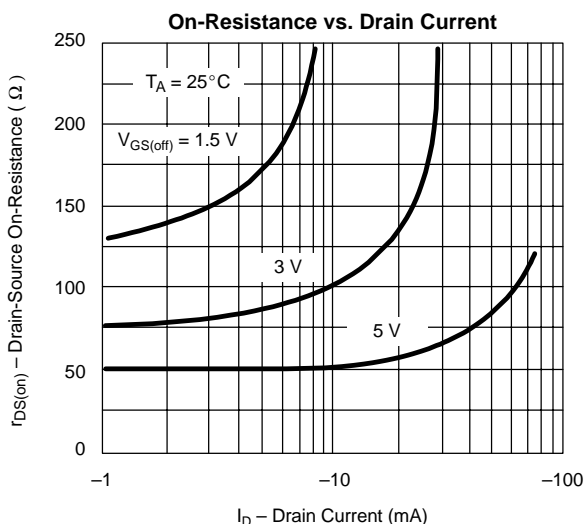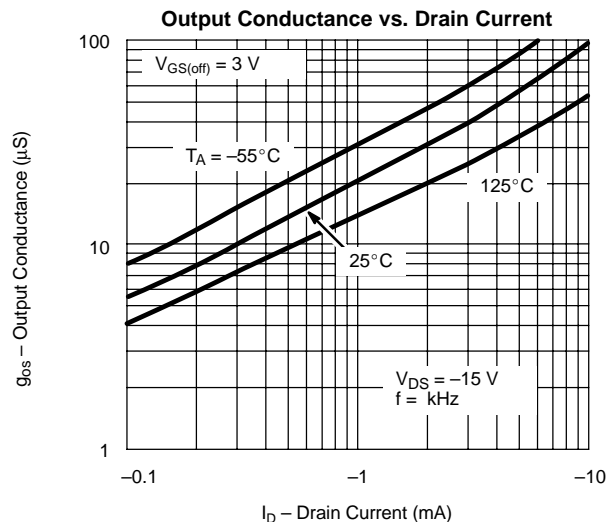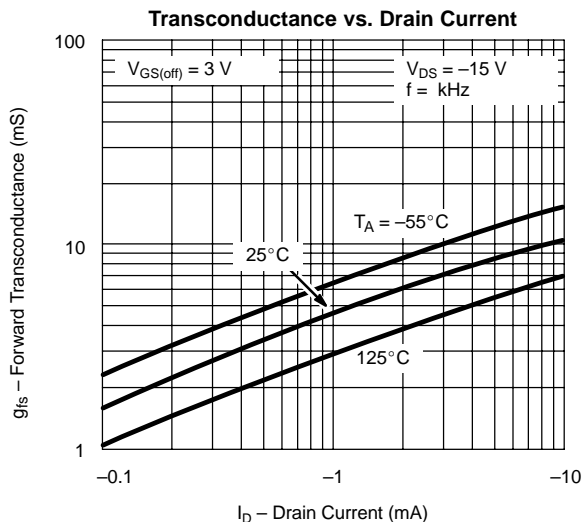



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.