

STA302A

查询STA302供应商

PNP Darlington

捷多邦, 专业PCB打样工厂, 24小时加急出货

General purpose/3-phase motor drive

External dimensions  STA300

Absolute maximum ratings

($T_a=25^\circ\text{C}$)


Symbol	Ratings	Unit
V_{CBO}	-50	V
V_{CEO}	-50	V
V_{EBO}	-6	V
I_c	-4	A
I_{cP}	-8 (PW \leq 10ms, Du \leq 50%)	A
P_T	3 ($T_a=25^\circ\text{C}$)	W
	15 ($T_c=25^\circ\text{C}$)	
T_j	150	$^\circ\text{C}$
T_{stg}	-40 to +150	$^\circ\text{C}$

Electrical characteristics

($T_a=25^\circ\text{C}$)


Symbol	Specification			Unit	Conditions
	min	typ	max		
I_{CBO}			-100	μA	$V_{CB}=-50\text{V}$
I_{EBO}			-10	mA	$V_{EB}=-6\text{V}$
V_{CEO}	-50			V	$I_c=-10\text{mA}$
h_{FE}	1000				$V_{CE}=-4\text{V}$, $I_c=-3\text{A}$
$V_{CE(sat)}$			-2.0	V	$I_c=-3\text{A}$, $I_b=-10\text{mA}$
t_{on}		0.4		μs	$V_{CC}=-30\text{V}$, $I_c=-3\text{A}$,
t_{stg}		0.8		μs	$I_b=-10\text{mA}$
t_f		0.6		μs	

Equivalent circuit diagram

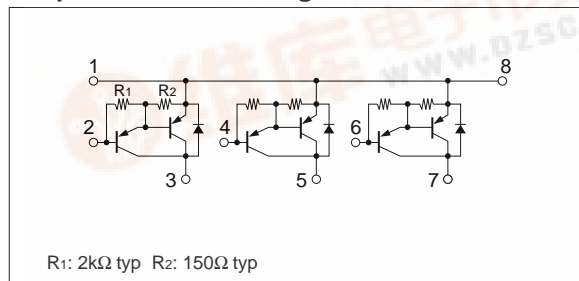


Characteristic curves


I_c - V_{CE} Characteristics (Typical)




h_{FE} - I_c Characteristics (Typical)




h_{FE} - I_c Temperature Characteristics (Typical)




$V_{CE(sat)}$ - I_c Temperature Characteristics (Typical)




$V_{CE(sat)}$ - I_b Characteristics (Typical)




I_c - V_{BE} Temperature Characteristics (Typical)



θ_{j-a} -PW Characteristics

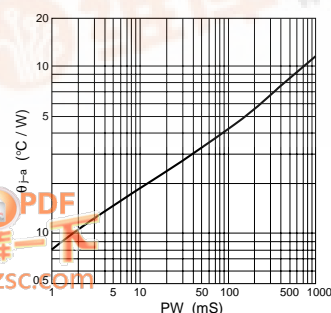

P_T - T_a Characteristics



Safe Operating Area (SOA)

