



# STN2N10L

## N - CHANNEL ENHANCEMENT MODE POWER MOS TRANSISTOR

ADVANCE DATA

TYPE	V <sub>DSS</sub>	R <sub>D(on)</sub>	I <sub>DCONT</sub>
STN2N10L	100 V	< 0.5 Ω	2 A

- TYPICAL R<sub>D(on)</sub> = 0.35 Ω
- AVALANCHE RUGGED TECHNOLOGY
- SOT-223 CAN BE WAVE OR REFLOW SOLDERED
- AVAILABLE IN TAPE AND REEL ON REQUEST
- 150 °C OPERATING TEMPERATURE
- APPLICATION ORIENTED CHARACTERIZATION


### APPLICATIONS

- HARD DISK DRIVERS
- SMALL MOTOR CURRENT SENSE CIRCUITS
- DC-DC CONVERTERS AND POWER SUPPLIES



SOT-223

### INTERNAL SCHEMATIC DIAGRAM



SC06140

### ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V <sub>DS</sub>	Drain-source Voltage (V <sub>GS</sub> = 0)	100	V
V <sub>DGR</sub>	Drain-gate Voltage (R <sub>GS</sub> = 20 kΩ)	100	V
V <sub>GS</sub>	Gate-source Voltage	± 15	V
I <sub>D</sub> (*)	Drain Current (continuous) at T <sub>c</sub> = 25 °C	2	A
I <sub>D</sub> (*)	Drain Current (continuous) at T <sub>c</sub> = 100 °C	1.3	A
I <sub>DM</sub> (•)	Drain Current (pulsed)	8	A
P <sub>tot</sub>	Total Dissipation at T <sub>c</sub> = 25 °C	2.7	W
	Derating Factor	0.022	W/°C
T <sub>stg</sub>	Storage Temperature	-65 to 150	°C
T <sub>j</sub>	Max. Operating Junction Temperature	150	°C

(•) Pulse width limited by safe operating area (\* ) Limited by package

## STN2N10L

---

### THERMAL DATA

$R_{thj\text{-}pcb}$	Thermal Resistance Junction-PC Board	Max	46	$^{\circ}\text{C}/\text{W}$
$R_{thj\text{-}amb}$	Thermal Resistance Junction-ambient (Surface Mounted)	Max	60	$^{\circ}\text{C}/\text{W}$
$T_L$	Maximum Lead Temperature For Soldering Purpose		260	$^{\circ}\text{C}$

### AVALANCHE CHARACTERISTICS

Symbol	Parameter	Max Value	Unit
$I_{\text{AR}}$	Avalanche Current, Repetitive or Not-Repetitive (pulse width limited by $T_j$ max, $\delta < 1\%$ )	2	A
$E_{\text{AS}}$	Single Pulse Avalanche Energy (starting $T_j = 25^{\circ}\text{C}$ , $I_D = I_{\text{AR}}$ , $V_{\text{DD}} = 25\text{ V}$ )	20	mJ
$E_{\text{AR}}$	Repetitive Avalanche Energy (pulse width limited by $T_j$ max, $\delta < 1\%$ )	5	mJ
$I_{\text{AR}}$	Avalanche Current, Repetitive or Not-Repetitive ( $T_c = 100^{\circ}\text{C}$ , pulse width limited by $T_j$ max, $\delta < 1\%$ )	1.3	A

### ELECTRICAL CHARACTERISTICS ( $T_{\text{case}} = 25^{\circ}\text{C}$ unless otherwise specified)

#### OFF

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_{(\text{BR})\text{DSS}}$	Drain-source Breakdown Voltage	$I_D = 250\text{ }\mu\text{A}$ $V_{GS} = 0$	100			V
$I_{\text{DSS}}$	Zero Gate Voltage Drain Current ( $V_{GS} = 0$ )	$V_{DS} = \text{Max Rating}$ $V_{DS} = \text{Max Rating} \times 0.8$ $T_c = 125^{\circ}\text{C}$			250 1000	$\mu\text{A}$ $\mu\text{A}$
$I_{\text{GSS}}$	Gate-body Leakage Current ( $V_{DS} = 0$ )	$V_{GS} = \pm 15\text{ V}$			$\pm 100$	nA

#### ON (\*)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_{GS(\text{th})}$	Gate Threshold Voltage	$V_{DS} = V_{GS}$ $I_D = 250\text{ }\mu\text{A}$	1	1.8	2.5	V
$R_{DS(\text{on})}$	Static Drain-source On Resistance	$V_{GS} = 5\text{ V}$ $I_D = 1\text{ A}$ $V_{GS} = 5\text{ V}$ $I_D = 1\text{ A}$ $T_c = 100^{\circ}\text{C}$		0.35	0.5 1	$\Omega$ $\Omega$
$I_{D(\text{on})}$	On State Drain Current	$V_{DS} > I_{D(\text{on})} \times R_{DS(\text{on})\text{max}}$ $V_{GS} = 10\text{ V}$	2			A

### DYNAMIC

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$g_{fs}$ (*)	Forward Transconductance	$V_{DS} > I_{D(\text{on})} \times R_{DS(\text{on})\text{max}}$ $I_D = 1\text{ A}$	1	2.5		S
$C_{iss}$ $C_{oss}$ $C_{rss}$	Input Capacitance Output Capacitance Reverse Transfer Capacitance	$V_{DS} = 25\text{ V}$ $f = 1\text{ MHz}$ $V_{GS} = 0\text{ V}$		340 65 20	450 100 30	pF pF pF

**ELECTRICAL CHARACTERISTICS** (continued)

## SWITCHING ON

<b>Symbol</b>	<b>Parameter</b>	<b>Test Conditions</b>	<b>Min.</b>	<b>Typ.</b>	<b>Max.</b>	<b>Unit</b>
$t_{d(on)}$ $t_r$	Turn-on Time Rise Time	$V_{DD} = 50 \text{ V}$ $I_D = 4 \text{ A}$ $R_G = 4.7 \Omega$ $V_{GS} = 5 \text{ V}$		6 20	10 30	ns ns
$(di/dt)_{on}$	Turn-on Current Slope	$V_{DD} = 80 \text{ V}$ $I_D = 8 \text{ A}$ $R_G = 4.7 \Omega$ $V_{GS} = 5 \text{ V}$		380		$\text{A}/\mu\text{s}$
$Q_g$ $Q_{gs}$ $Q_{gd}$	Total Gate Charge Gate-Source Charge Gate-Drain Charge	$V_{DD} = 80 \text{ V}$ $I_D = 8 \text{ A}$ $V_{GS} = 5 \text{ V}$		10 6 3	15	nC nC nC

## SWITCHING OFF

<b>Symbol</b>	<b>Parameter</b>	<b>Test Conditions</b>	<b>Min.</b>	<b>Typ.</b>	<b>Max.</b>	<b>Unit</b>
$t_{r(V_{off})}$ $t_f$ $t_c$	Off-voltage Rise Time Fall Time Cross-over Time	$V_{DD} = 80 \text{ V}$ $I_D = 8 \text{ A}$ $R_G = 4.7 \Omega$ $V_{GS} = 5 \text{ V}$		10 10 20	15 15 30	ns ns ns

## SOURCE DRAIN DIODE

<b>Symbol</b>	<b>Parameter</b>	<b>Test Conditions</b>	<b>Min.</b>	<b>Typ.</b>	<b>Max.</b>	<b>Unit</b>
$I_{SD}$ $I_{SDM}(\bullet)$	Source-drain Current Source-drain Current (pulsed)				2 8	A A
$V_{SD} (\ast)$	Forward On Voltage	$I_{SD} = 2 \text{ A}$ $V_{GS} = 0$			1.5	V
$t_{rr}$ $Q_{rr}$ $I_{RRM}$	Reverse Recovery Time Reverse Recovery Charge Reverse Recovery Current	$I_{SD} = 8 \text{ A}$ $di/dt = 100 \text{ A}/\mu\text{s}$ $V_{DD} = 30 \text{ V}$ $T_j = 150^\circ\text{C}$		90 0.27 6		ns $\mu\text{C}$ A


(\ast) Pulsed: Pulse duration = 300  $\mu\text{s}$ , duty cycle 1.5 %

(\bullet) Pulse width limited by safe operating area

## STN2N10L

### SOT223 MECHANICAL DATA

DIM.	mm			mils		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
a	2.27	2.3	2.33	89.4	90.6	91.7
b	4.57	4.6	4.63	179.9	181.1	182.3
c	0.2	0.4	0.6	7.9	15.7	23.6
d	0.63	0.65	0.67	24.8	25.6	26.4
e1	1.5	1.6	1.7	59.1	63	66.9
e4			0.32			12.6
f	2.9	3	3.1	114.2	118.1	122.1
g	0.67	0.7	0.73	26.4	27.6	28.7
l1	6.7	7	7.3	263.8	275.6	287.4
l2	3.5	3.5	3.7	137.8	137.8	145.7
L	6.3	6.5	6.7	248	255.9	263.8

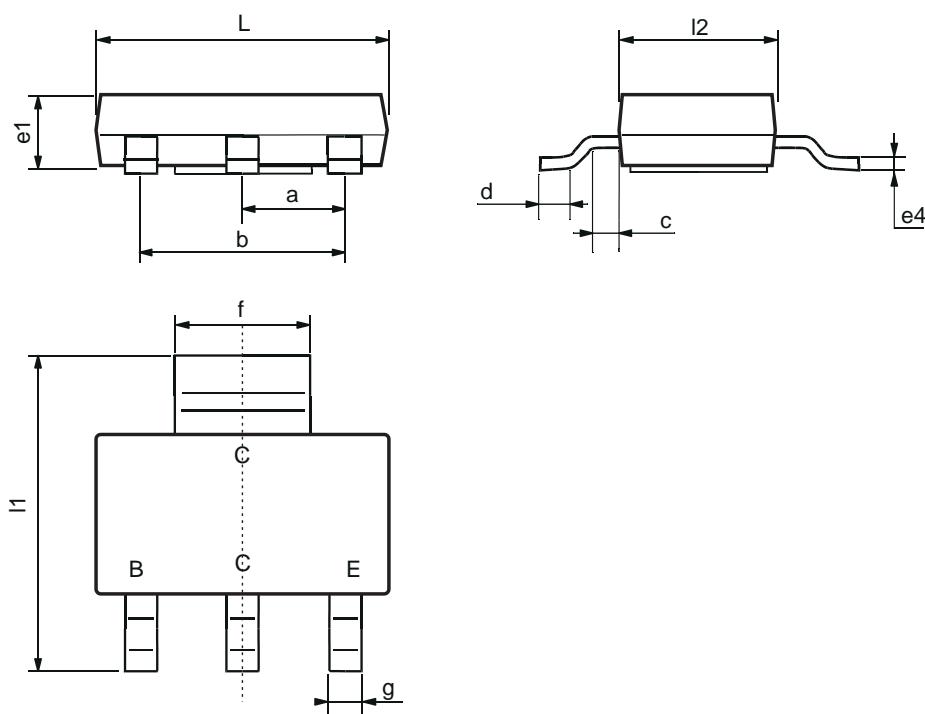

P008B

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1995 SGS-THOMSON Microelectronics - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES  
Australia - Brazil - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands -  
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A