



# SUD492H

Silicon epitaxial planar Diode

## Features


- Ultra high speed
- Fast reverse recovery time :  $t_{rr}=1.6\text{ns(Typ.)}$
- Small total capacitance :  $C_T=2.2\text{pF(Typ.)}$
- Three SDS914 chips in SOT-353 package

## Ordering Information

Type NO.	Marking	Package Code
SUD492H	X6	SOT-353

## Outline Dimensions

unit : mm

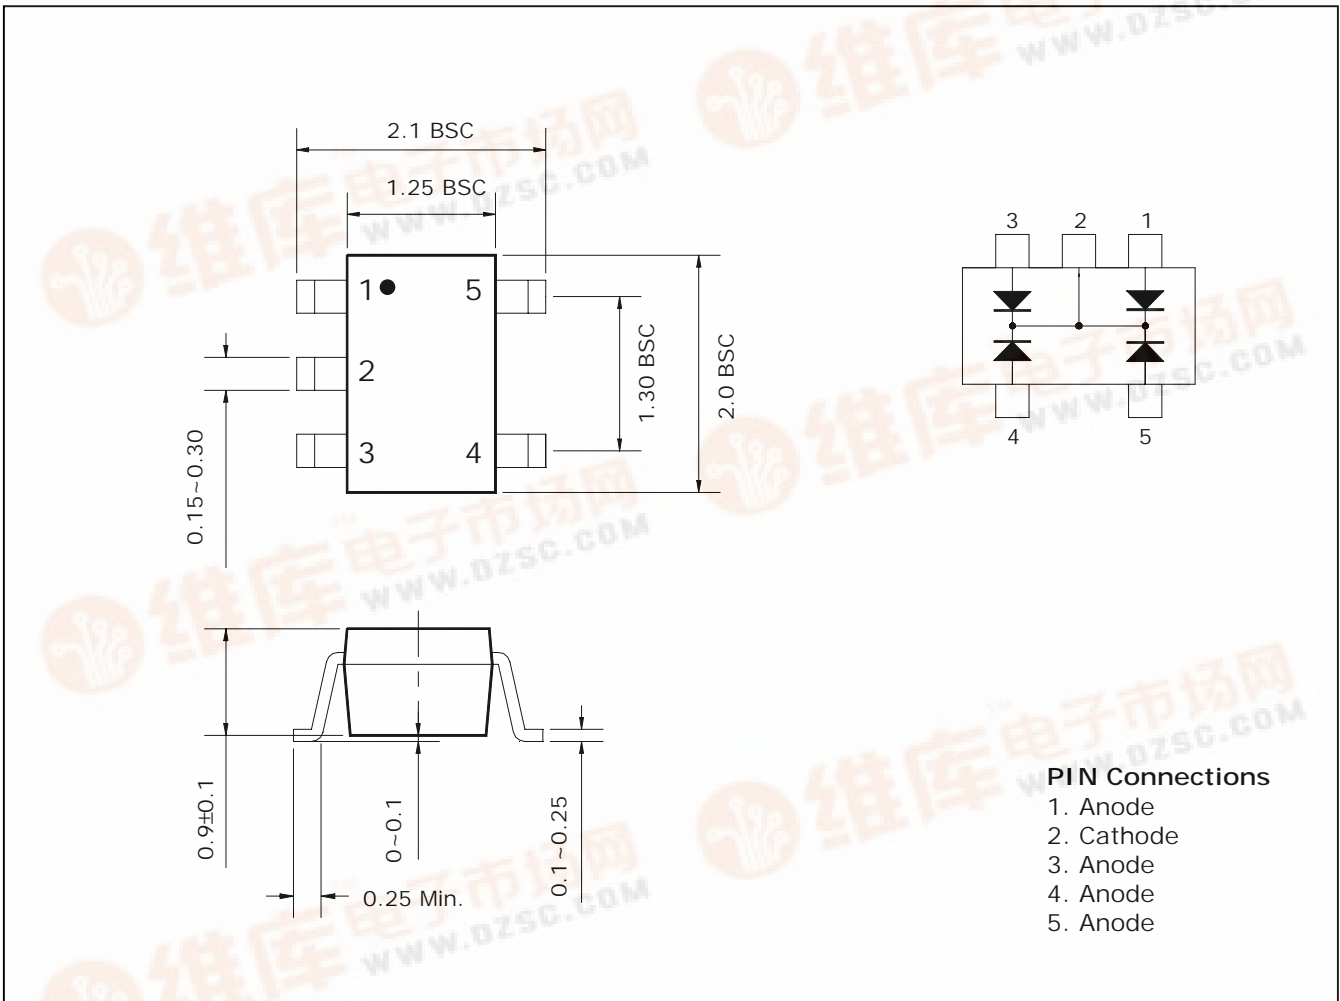

# SUD492H

## Absolute maximum ratings

Ta=25°C

Characteristic	Symbol	Ratings	Unit
Maximum(peak) reverse voltage	$V_{RM}$	85	V
Reverse voltage	$V_R$	80	V
Maximum(peak) forward current	$I_{FM}$	300	mA
Average forward current	$I_O$	100	mA
Surge current(10ms)	$I_{FSM}$	2	A
Power dissipation	$P_D$	150	mW
Junction temperature	$T_j$	150	°C
Storage temperature	$T_{stg}$	-55 ~ 150	°C


## Electrical Characteristics

Ta=25°C


Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Forward voltage	$V_{F(1)}$	$I_F=1mA$	-	0.6	-	V
	$V_{F(2)}$	$I_F=10mA$	-	0.7	-	
	$V_{F(3)}$	$I_F=100mA$	-	0.9	1.2	
Reverse current	$I_R$	$V_R=80V$	-	-	0.5	μA
Total capacitance	$C_T$	$V_R=0, f=1MHz$	-	2.2	4.0	pF
Reverse recovery time	$t_{rr}$	$I_F=10mA$	-	1.6	4.0	ns

## Electrical Characteristic Curves


**Fig. 1  $I_F$ - $V_F$**

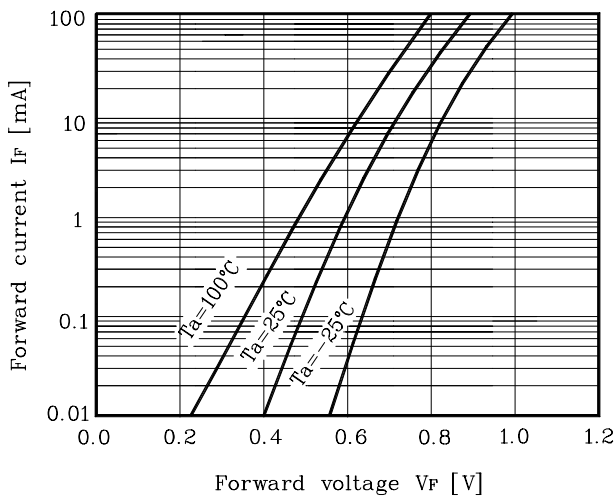


**Fig. 2  $I_R$ - $V_R$**

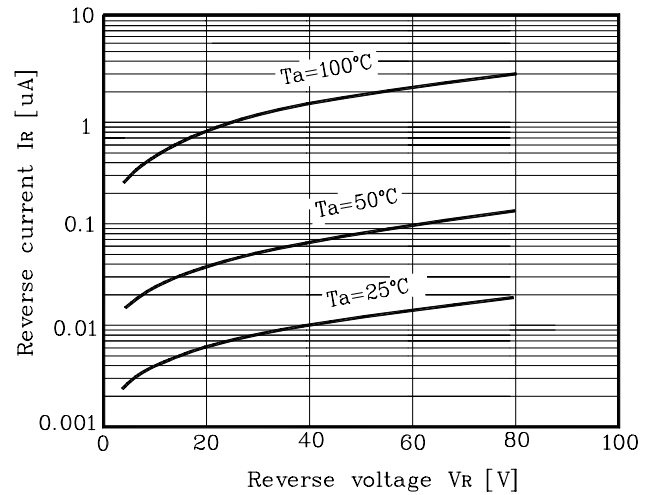

**Fig. 3  $C_T$ - $V_R$**

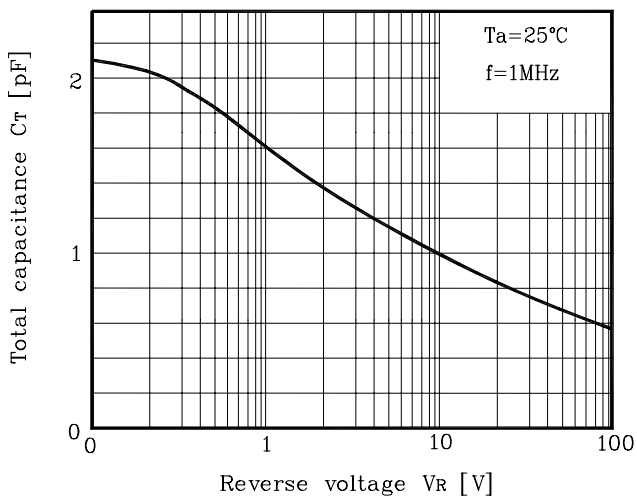

**Fig. 4  $t_{rr}$ - $I_F$**

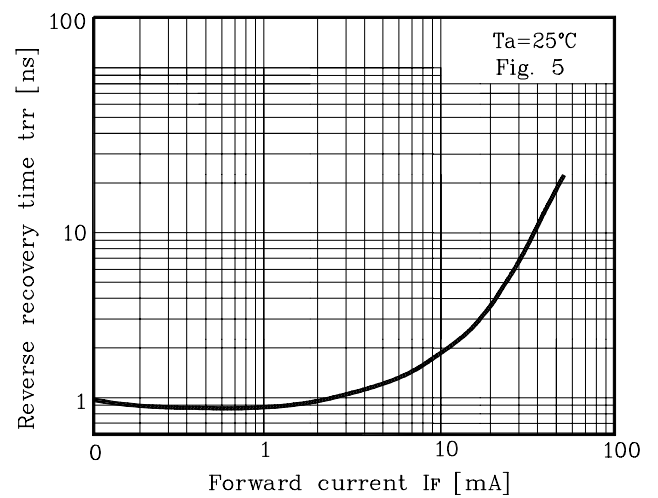

**Fig. 5 Reverse recovery time( $t_{rr}$ ) test circuit**

