



Matched SP4T RF Switch

20 - 1500 MHz

SW-164

V2.00

Features

- Internally Terminated
- Integral TTL Driver
- Low Loss - 0.9 dB Typical

Guaranteed Specifications* (From -55°C to +85°C)

Frequency Range	20-1500 MHz	
Insertion Loss	20-1500 MHz	2.0 dB Max
	20-1000 MHz	1.5 dB Max
	30-500 MHz	1.2 dB Max
VSWR (All States)	20-1500 MHz	1.80:1 Max
	20-1000 MHz	1.50:1 Max
	30-500 MHz	1.25:1 Max
Isolation	20-1500 MHz	35 dB Min
	20-1000 MHz	40 dB Min
	20-500 MHz	50 dB Min

Operating Characteristics

Impedance 50 Ohms Nominal

Switching Characteristics

t _{ON}	3.0 μ S Typ
t _{OFF}	1.5 μ S Typ
Transients (In-Band)	40 mV Typ

Input Power for 1 dB Compression	20-1500 MHz	+5 dBm Typ
	50-1500 MHz	+15 dBm Typ

Intermodulation Intercept Point (for two-tone input power up to +5 dBm)

Second Order	(20-1500 MHz)	+55 dBm Typ
	(50-1500 MHz)	+70 dBm Typ
Third Order	(20-1500 MHz)	+25 dBm Typ
	(50-1500 MHz)	+40 dBm Typ

Bias Power +9 to +15 VDC @ 50 mA Max
-5 VDC $\pm$ 5% @ 25 mA Max
(550 mW Typical)

Environmental

MIL-STD-883 screening available.

*All specifications apply when operated with bias voltages of +12 VDC and -5 VDC ($\pm$ 5%) and 50 ohm impedance at all RF ports

Ordering Information

Model Number

SW-164 PIN

Package


Dual Inline

Truth Table

TTL CONTROL INPUTS				CONDITION OF SWITCH			
"1" = TTL LOGIC HIGH				RF COMMON TO EACH RF PORT			
1	2	3	4	RF1	RF2	RF3	RF4
1	0	0	0	ON	OFF	OFF	OFF
0	1	0	0	OFF	ON	OFF	OFF
0	0	1	0	OFF	OFF	ON	OFF
0	0	0	1	OFF	OFF	OFF	ON

Specifications Subject to Change Without Notice.

DI-2

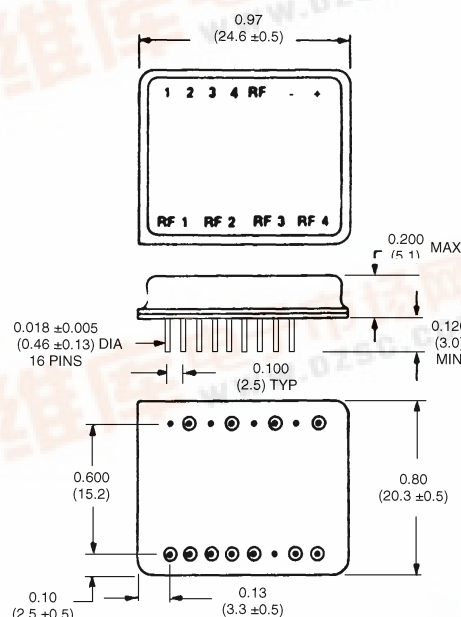


Dimensions in () are in mm.


Unless Otherwise Noted: .xxx = $\pm$ 0.010 (.xx = $\pm$ 0.25)
.xx = $\pm$ 0.02 (.x = $\pm$ 0.5)

Typical Performance

INSERTION LOSS

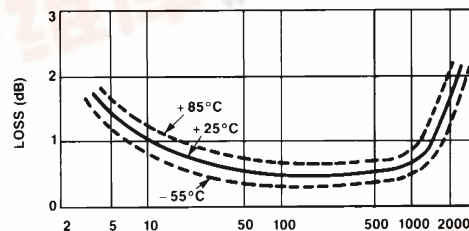

ISOLATION

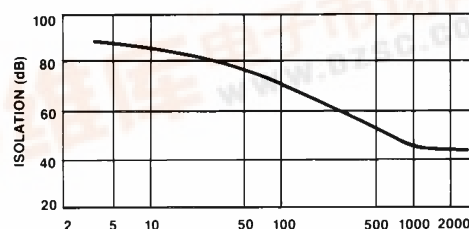

VSWR

