

TA7787AP / AF
TA8110AP / AF

T-77-05-07

AM/FM IF SYSTEM

TA7787AP/AF, TA8110AP/AF are the AM/FM IF SYSTEM ICs which are designed for Radio Cassette Players and 3V Head Phone Radios.

TA8110AP/AF is Upper Heterodyne use and TA7787AP/AF is Lower Heterodyne use.

- AM Detector Coil and IF By-pass Condenser are not necessary.
 - Common Output for AM/FM
 - One Terminal Type AM Low Cut Circuit is built in.
 - AM OSC Circuit with ALC is adopted.
 - FM Soft Muting Circuit is built in.
 - A Terminal is provided to stop the FM MPX IC VCO during AM reception and when the FM signal is too weak.
 - Low Supply Current. ($V_{CC}=3V$, $T_a=25^{\circ}C$)

FM : I_{GG(1)}=5..3mA(Typ.)

AM : ICC(2)=4. BnA(Typ.)



- V_{CC}(opr)=1.8~8.0V (TYP: V_{CC}=3V)

MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Supply Voltage		V _{CC}	8	V
LED Current		I _{LED}	10	mA
LED Voltage		V _{LED}	10	V
Power Dissipation (Note 1)	DIP-16	P _D	750	mW
	MFP-16	(Note 2)	350	
Operating Temperature		T _{opr}	-25~75	°C
Storage Temperature		T _{stg}	-55~150	°C

Note 1 : TA7787AP, TA8110AP...DIP-16,
TA7787AF, TA8110AF...MFP-16

Note 2 : Derated above Ta=25°C in the proportion of 6mW for DIP-16 and of 2.8mW for MFP-16.

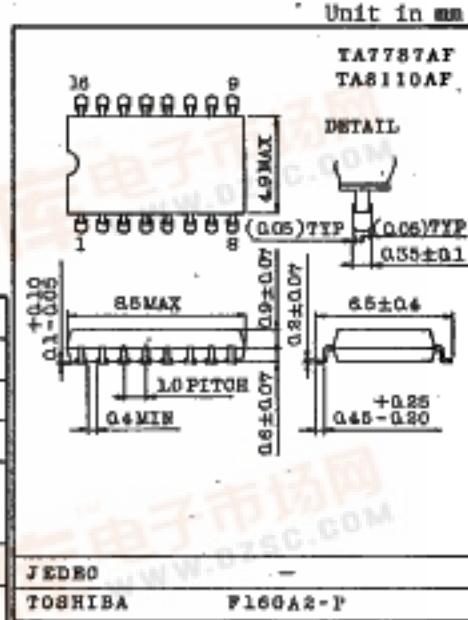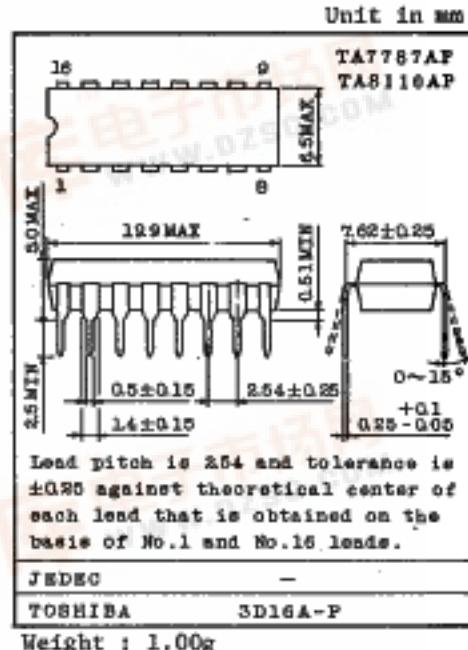


Weight : 0.14g

AUDIO LINEAR IC

TA7787AP/AF TA8110AP/AF

T-77-05-07

BLOCK DIAGRAM

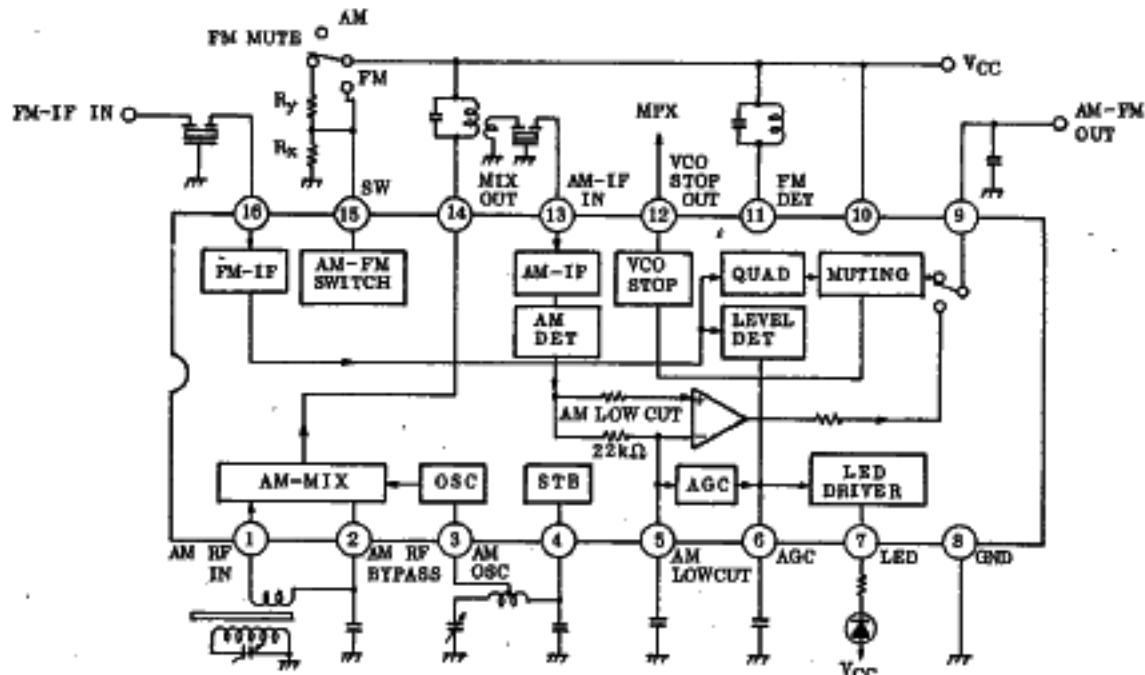

TERMINAL VOLTAGE AT NO SIGNAL (V_{CC}=3V, Ta=25°C)

PIN No.	ITEM	SYMBOL	TYPICAL VALUE		UNIT
			AM	FM	
1	(AM RF IN)	V1	1.1	1.1	V
2	(AM RF BY-PASS)	V2	1.1	1.1	V
3	(AM OSC)	V3	1.6	1.6	V
4	(STB)	V4	1.6	1.6	V
5	(AM LOW CUT)	V5	0.4	0.3	V
6	(AGC)	V6	0.4	0.35	V
7	(LED)	V7	-	-	V
8	(GND)	V8	0	0	V
9	(AM-FM OUT)	V9	1.1	1.1	V
10	(V _{CC})	V10	3.0	3.0	V
11	(FM DET)	V11	3.0	3.0	V
12	(VCO STOP OUT)	V12	-	-	V
13	(AM IF IN)	V13	1.1	1.1	V
14	(AM MIX OUT)	V14	3.0	3.0	V
15	(AM-FM SWITCH)	V15	0	-	V
16	(FM IF IN)	V16	1.1	1.1	V

—TOSHIBA—

TA7787AP/AF TA8110AP/AF

T-77-05-07

ELECTRICAL CHARACTERISTICS

Unless otherwise specified, $T_a=25^\circ C$, $V_{CC}=3V$

FM : $f=10.7MHz$, $\Delta f=\pm 22.5kHz$, $f_m=1kHz$

AM : $f=1MHz$, Mod=30%, $f_m=1kHz$

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Current	$I_{CC(1)}$	1	FM Mode $V_{IN}=0$	-	5.3	8.2	mA
	$I_{CC(2)}$		AM Mode $V_{IN}=0$	-	4.8	7.5	
Input Limiting Voltage	$V_{IN(lim)}$	1	-3dB Limiting Point	-	43	49	$dB\mu$
Recovered Output Voltage	V_{OD}	1	$V_{IN}=80dB\mu$	55	80	110	mV_{rms}
Signal to Noise Ratio	S/N	1	$V_{IN}=80dB\mu$ $\Delta f=22.5kHz \rightarrow 0$	-	68	-	dB
Total Harmonic Distortion	THD	1	$V_{IN}=80dB\mu$	-	0.1	-	%
FM AM Rejection Ratio	AMR	1	$V_{IN}=80dB\mu$	-	32	-	dB
Lamp ON Sensitivity	V_L	1	$I_L=1mA$	37	43	49	$dB\mu$
VCO Stop Sensitivity	V_{stop}	1		-	45	-	$dB\mu$
Muting Level	MUT	1	$R_x=22k\Omega$, $R_y=22k\Omega$	-	33	-	dB
7 Pin Saturation Voltage	V_{LED}	1	$I_L=10mA$, $V_6=1.2V$	-	80	200	mV
12 Pin Saturation Voltage	V_{VCO}	1	$I_{VCO}=100\mu A$	-	40	65	mV
AM	Recovered Output Voltage	V_{OD}	$V_{IN}=60dB\mu$, $V_6 \rightarrow GND$	50	75	100	mV_{rms}
	Signal to Noise Ratio	S/N	$V_{IN}=60dB\mu$	-	41	-	dB
	Total Harmonic Distortion	THD	$V_{IN}=60dB\mu$	-	1.0	-	%
			$V_{IN}=100dB\mu$, Mod=80%	-	2.0	-	
	Lamp ON Sensitivity	V_L	$I_L=1mA$	-	29	35	$dB\mu$
Output Resistance	R_{O9}	1	$V_{IN}=26dB\mu$	22	33	70	mV_{rms}
			FM Mode	-	0.5	-	$k\Omega$
			AM Mode	-	10	-	


* V_{IN} OPEN Display

AUDIO LINEAR IC

TA7787AP/AF TA8110AP/AF

T-77-05-07

TEST CIRCUIT 1

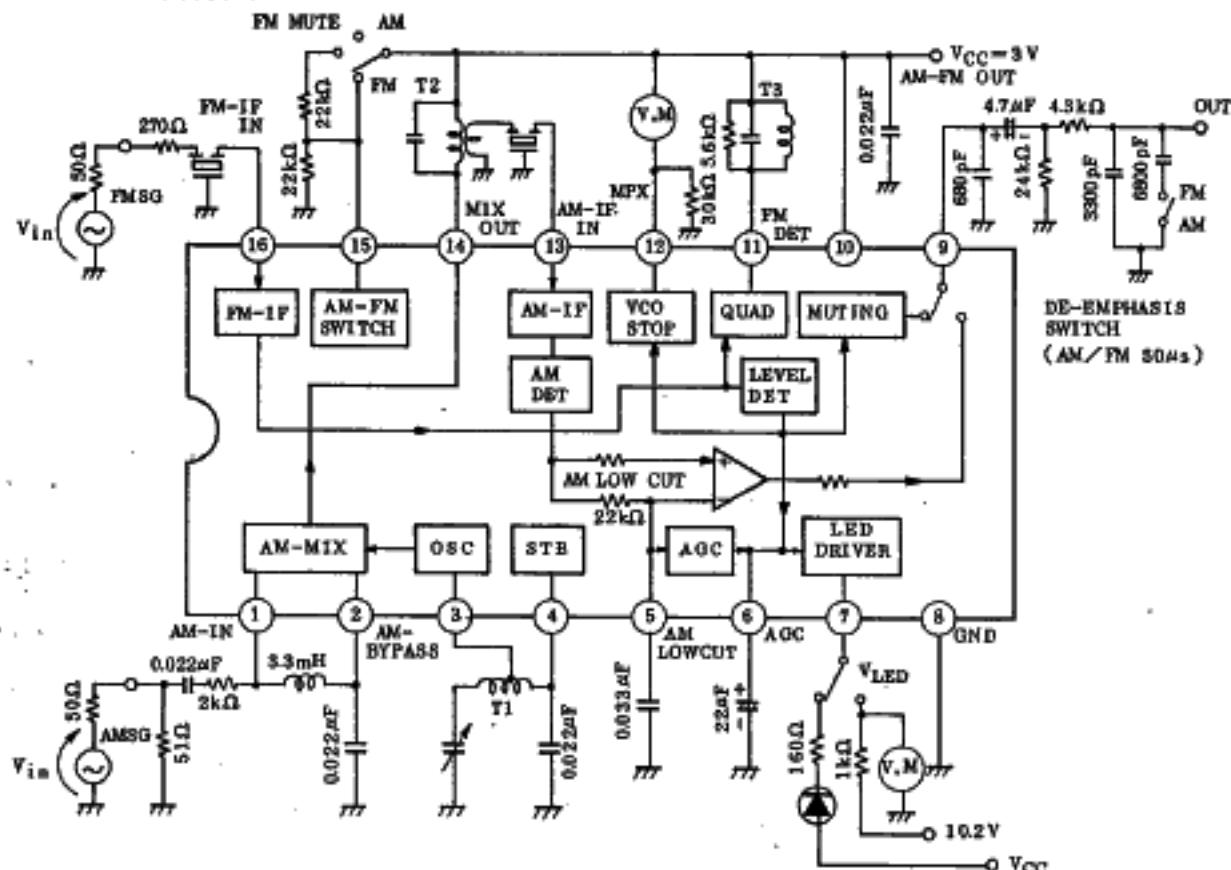


COIL DATA (TEST CIRCUIT)


S : SUMIDA ELECTRIC Co.,Ltd.

COIL No.	f (kHz)	L (μH)	C _o (pF)	Q _o	TURN				REF. (COIL No.)
					1-2	2-3	1-3	4-6	
T1 AM OSC	796kHz	288		155	13	73			0.08 UEW 4147-1356-038
T2 AM IFT	455kHz		180	120			180	15	0.06 UEW 2150-2162-165
T3 FM DET	10.7MHz		47	165			16		0.09 UEW 2153-4095-122


T1 : AM OSC



T1 : AM IFT



T3 : FM DET



=TOSHIBA=

TA7787AP/AF TA8110AP/AF

T-77-05-07

INTERNAL CIRCUIT AND FUNCTIONAL DESCRIPTION

1. AM OSCILLATION CIRCUIT (Fig.1)

For adopting the level control (ALC) circuit, the oscillation level is stabilized.

The oscillation frequency can be made up to about 30MHz and can be applied to SW band. The relation of the oscillation voltage and the oscillation current to Q of the oscillation coil is shown in Graph 1.

2. AM LOW-CUT CIRCUIT (Fig.2)

This circuit can improve the clearness of the AM audio by decreasing the low-frequency content of the output signal during AM reception.

The cut-off frequency f_L is determined by the internal resistance $22\text{k}\Omega$ (Typ.) and the external capacitor C_5 of (5) pin as following;

$$f_L = \frac{1}{2 \times \pi \times 22 \times 10^3 \times C_5} \quad (\text{Hz})$$

By serially connection the resistance to the capacitor C_5 between (5) pin and GND, the detection output level of AM can be reduced.

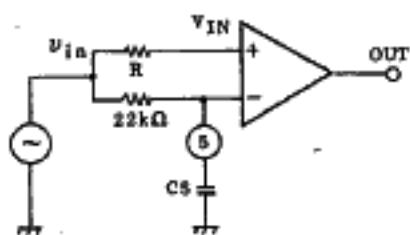



Fig.2 AM LOW CUT CIRCUIT



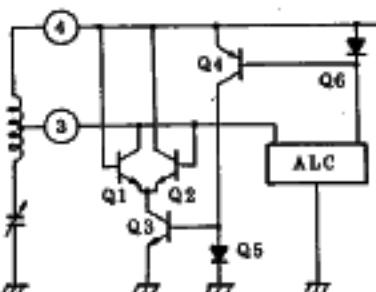


Fig.1 AM OSCILLATION CIRCUIT

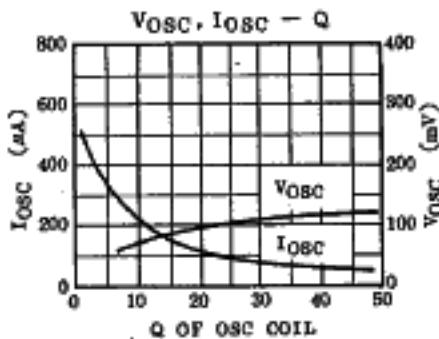

Graph 1 VOSC, IOSC - Q

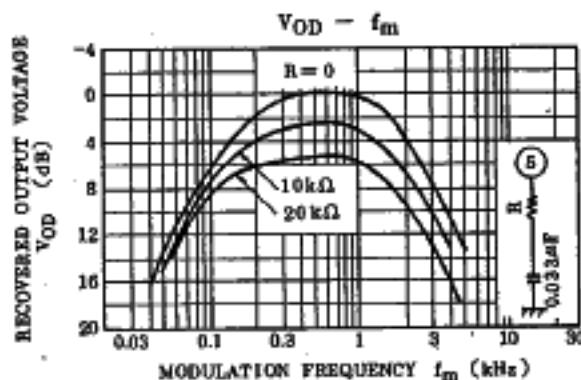

Graph 2 VOD - fm

AUDIO LINEAR IC

TOSHIBA, ELECTRONIC 02 DE 9097247 0017641 5

9097247 TOSHIBA, ELECTRONIC
TA7787AP/AF
TA8110AP/AF

02E 17641 D


T-77-05-07

3. AGC CIRCUIT

The external capacitor C6 of (6) pin is the smoothing capacitor for AGC. The varying condition of the capacity value of C6 and the frequency characteristics of distortion are shown in Graph 3.

4. FM IF AND DETECTION CIRCUIT

The input impedance ((16) pin) of IF amplifier is set at 330Ω (Typ.). S curve characteristics of FM detection output in TA7787AP/AF and TA8110AP/AF are reverse to each other, and when assembled with TA7378P (IC for FM front end with diode for AFC built-in), TA7787AP/AF becomes for the lower heterodyne use and TA8110AP/AF for the upper heterodyne use.

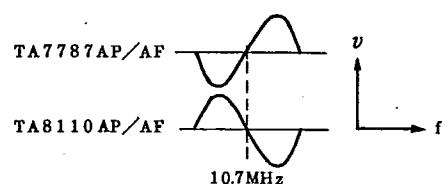

5. FM/AM SWITCHING

FM/AM switching is made by the voltage of (15) pin.

V_{CC} FM
0.7V < V₁₅ < V_{CC} FM muting operation
0.7V or less AM

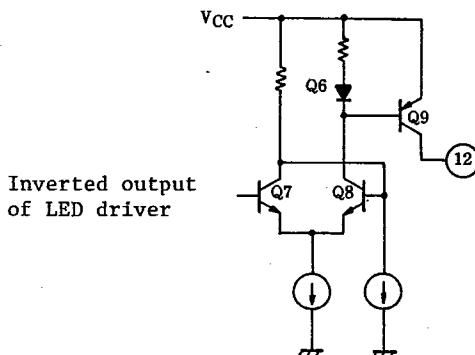
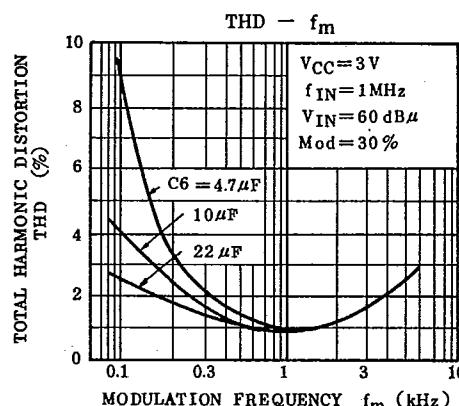


Fig.3 TERMINAL TO STOP VCO

TOSHIBA, ELECTRONIC 02 DE 9097247 0017642 7

9097247 TOSHIBA, ELECTRONIC

02E 17642 D

TA7787AP/AF TA8110AP/AF

T-77-05-07

6. TERMINAL FOR MPX VCO STOP

By using (12) pin, VCO of MPX IC can be stopped. The output circuit is shown in Fig.3, and the connections to MPX ICs (TA7370P/F and TA7343AP/AF) are shown in Fig.4.

7. CONNECTION TO MPX IC

In case of connecting MPX IC secondarily to this IC to make the stereo function, it is conventionally necessary to switch the capacitor C9 with AM/FM in IF output. However, since the output impedance of TA7787AP/AF and TA8110AP/AF are changed over to $10k\Omega$ in AM and 500Ω in FM, the frequency characteristics of AM/FM can easily be changed with a piece of the external capacitor C9 as shown in Fig.5.

The frequency characteristics in this state are shown in Fig.6.

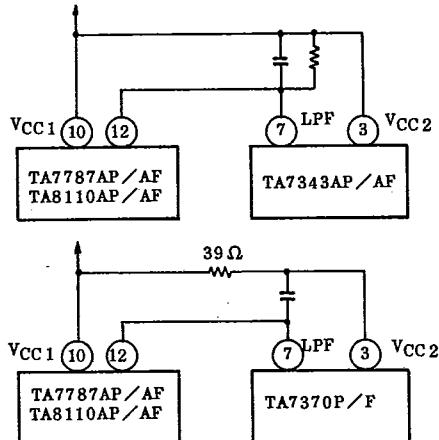


Fig.4 CONNECTION TO TA7343AP/AF AND TA7370P/F

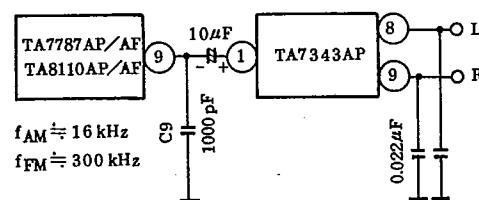


Fig.5 CONNECTION TO TA7343AP

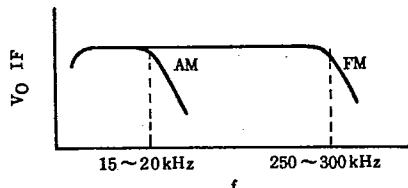


Fig.6 FREQUENCY CHARACTERISTICS OF DET OUTPUTS

AUDIO LINEAR IC




TOSHIBA, ELECTRONIC 02 DE 9097247 0017643 9

9097247 TOSHIBA, ELECTRONIC

02E 17643 D

TA7787AP/AF TA8110AP/AF

T-77-05-07

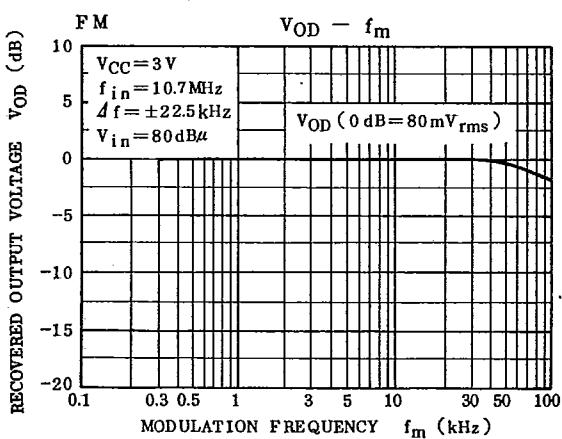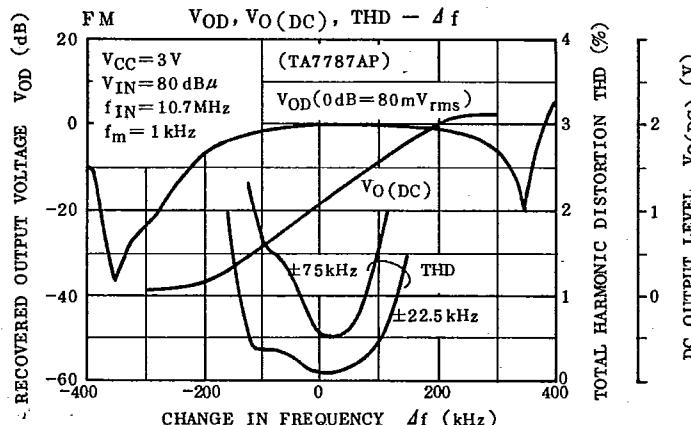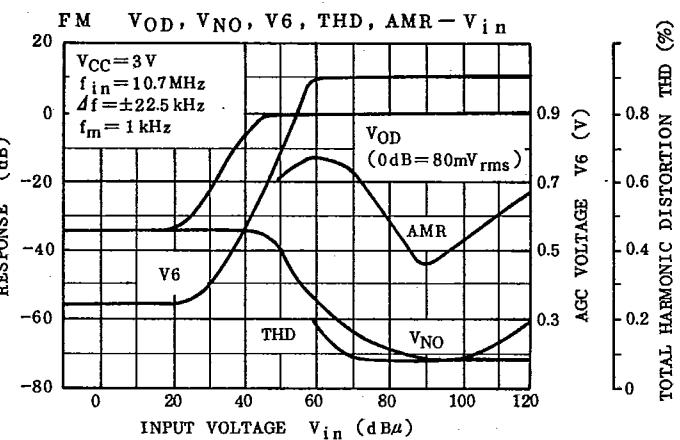

TOSHIBA




TOSHIBA, ELECTRONIC 02 DE 9097247 0017644 0

9097247 TOSHIBA, ELECTRONIC

02E 17644 D

TA7787AP/AF TA8110AP/AF

T-77-05-07

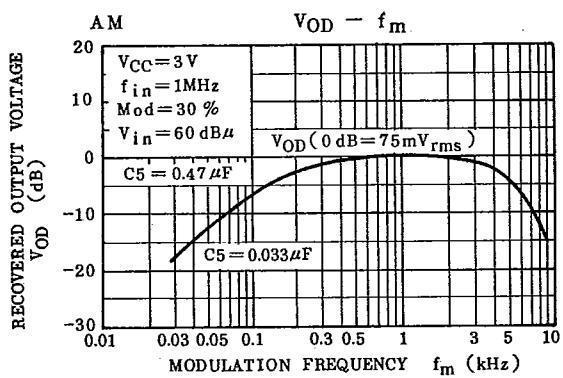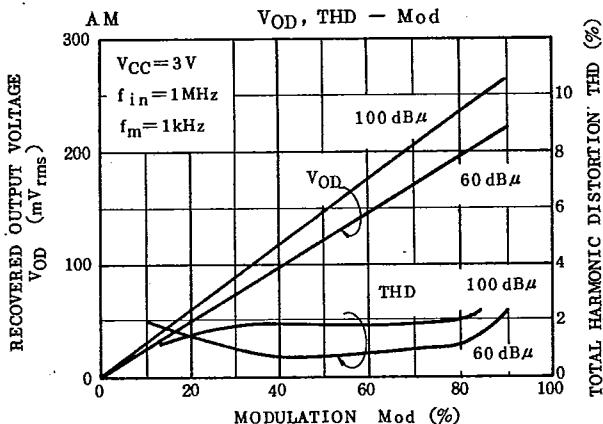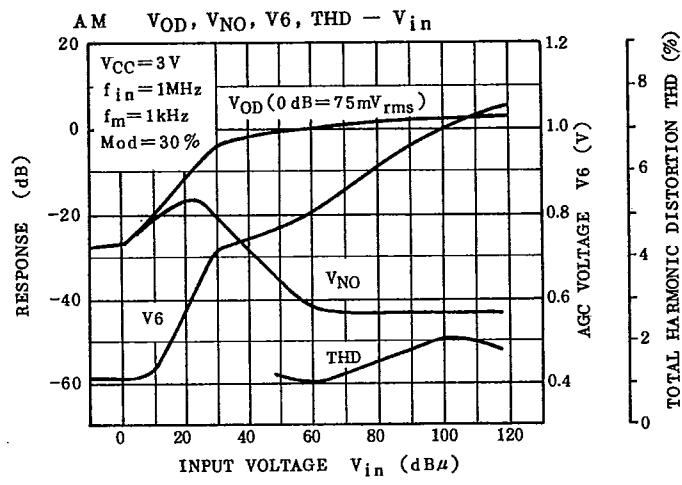

AUDIO LINEAR IC




TOSHIBA, ELECTRONIC 02 DE 9097247 0017645 2

9097247 TOSHIBA, ELECTRONIC

02E 17645 D

**TA7787AP/AF
TA8110AP/AF**

T-77-05-07

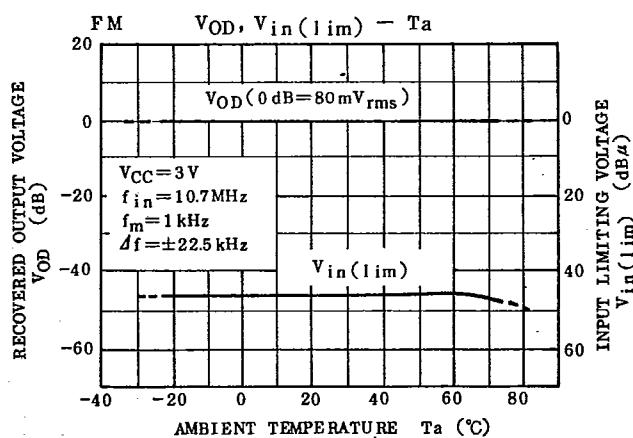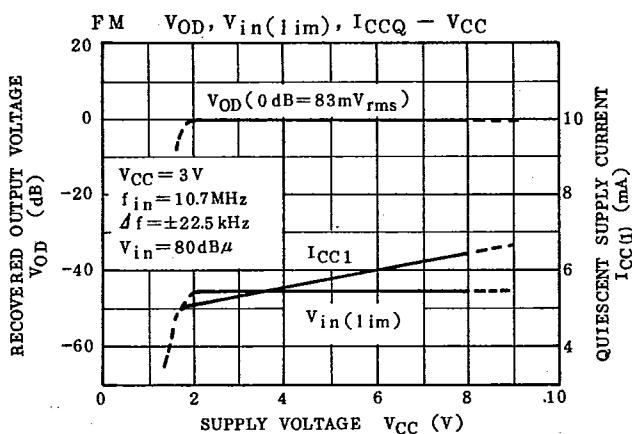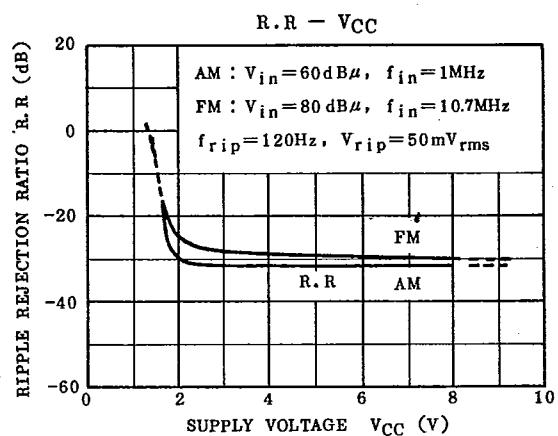

TOSHIBA




TOSHIBA ELECTRONIC 02 DE 9097247 0017646 4

9097247 TOSHIBA ELECTRONIC

02E 17646 D

TA7787AP/AF TA8110AP/AF

T-77-05-07

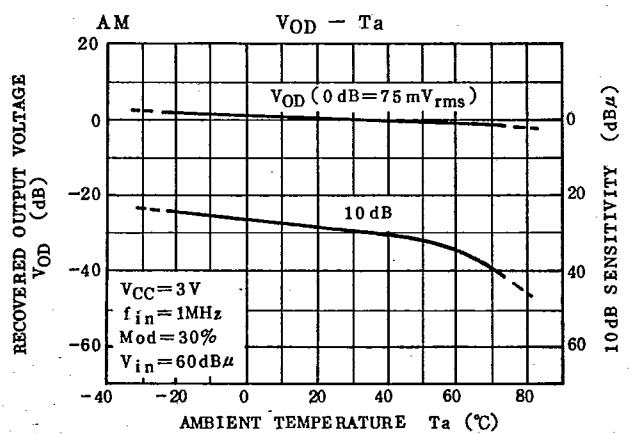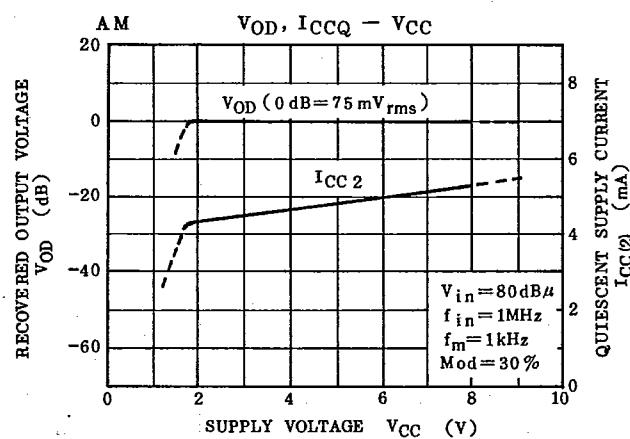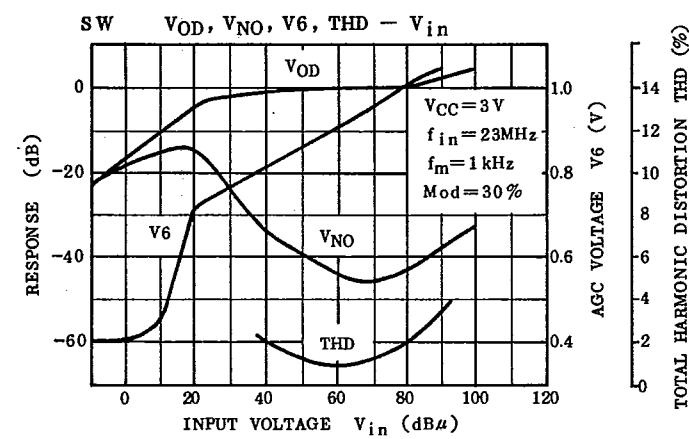

AUDIO LINEAR IC