



TC12

LOW COST, ONE WIRE DIGITAL THERMOMETER WITH SHUTDOWN


FEATURES

- Single Wire Interface to Host Microcontroller
- High Precision±1°C Accuracy (Typical)
- Wide Measurement Range 40°C to +125°C
- No External Components Required
- Complimentary (TC12C) or Open Drain Outputs (TC12N)
- Low Voltage Operation2.7V to 5.5V
- Small PackageSOT-23A-5
- Low Cost
- Shutdown Input


APPLICATIONS

- Notebook Computers
- File Servers
- Desktop Computers

FUNCTIONAL BLOCK DIAGRAM



TYPICAL APPLICATION

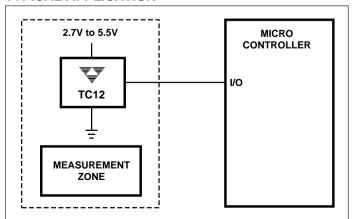

GENERAL DESCRIPTION

The TC12 is a monolithic temperature sensor that outputs a pulse waveform whose duty cycle varies in direct proportion to measured temperature. This output format is easily converted to binary data using logic or the counter/timer circuit on-board the system microcontroller. Typical accuracy is $\pm 1^{\circ}$ C over the rated measurement range of -40° C to $+125^{\circ}$ C. It operates from supply voltages as low as 2.7V.


Unlike voltage output temperature sensors, the digital output of the TC12 offers superior immunity to system noise and does not require an A/D converter. Unlike two wire serial temperature sensors, the TC12 communicates over a single wire, and without complex serial protocol overhead.

ORDERING INFORMATION

Part No.	Package	Temp. Range	Output Config.
TC12CVCT	SOT-23A-5*	- 40°C to +125°C	Complimentary
TC12NVCT	SOT-23A-5*	- 40°C to +125°C	Open Drain
TC625EV	Evaluation Kit for the TC12 and TC625		

NOTE: *SOT-23A-5 is equivalent to EIAJ (SC-74).

PIN CONFIGURATION



Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from:

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com