

1M BIT (128K WORD x 8 BIT) CMOS MASK ROM
SILICON GATE CMOS

DESCRIPTION

The TC531001CP/CF is a 1,048,576 bits read only memory organized as 131,072 words by 8 bits with a low bit cost, thus being suitable for use in program memory of micro-processor, and data memory, especially character generator. The TC531001CP/CF using CMOS technology is most suitable for low power applications where battery operations are required.


The TC531001CP/CF has one chip enable input $\overline{CE}$ for device selection.

FEATURES

TC531001CP/CF	120ns Version	150ns Version
Access Time (max.)	120ns	150ns
Power Dissipation Operating Current (max.)	40mA	35mA
Power Dissipation Standby Current (max.)	20 μ A	20 μ A

- Single 5V Power Supply
- All Inputs and Outputs: TTL Compatible
- Three State Outputs
- Fully Static Operation
- Package Plastic DIP: TC531001CP
 Plastic FP : TC531001CF


PIN CONNECTION

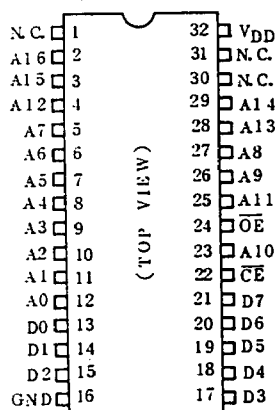

PIN NAMES

A0 ~ A16	Address Inputs
D0 ~ D7	Data Outputs
$\overline{OE}$	Output Enable Input
$\overline{CE}$	Chip Enable Input
VDD	Power Supply
GND	Ground
N.C.	No Connection

BLOCK DIAGRAM

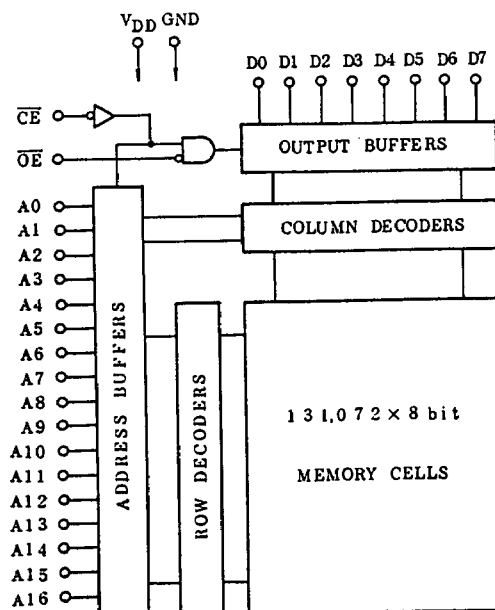

MAXIMUM RATINGS

SYMBOL	ITEM	RATING	UNIT
V _{DD}	Power Supply Voltage	-0.5 ~ 7.0	V
V _{IN}	Input Voltage	-0.5 ~ V _{DD}	V
V _{OUT}	Output Voltage	0 ~ V _{DD}	V
P _D	Power Dissipation	1.0/0.6 *	W
T _{STG}	Storage Temperature	-55 ~ 150	°C
T _{OPR}	Operating Temperature	-40 ~ 70	°C
T _{SOLDER}	Soldering Temperature Time	260 • 10	°C•sec

Note: * Plastic FP

DC OPERATING CONDITIONS (Ta=-40~70°C)

SYMBOL	PARAMETER	MIN.	TYP.	MAX.	UNIT
V _{DD}	Power Supply Voltage	4.5	5.0	5.5	V
V _{IH}	Input High Voltage	2.2	-	V _{DD} +0.3	
V _{IL}	Input Low Voltage	-0.3	-	0.8	

DC and OPERATING CHARACTERISTICS (Ta=-40~70°C, V_{DD}=5V±10%)

SYMBOL	PARAMETER	CONDITION		MIN.	MAX.	UNIT
I _{IL}	Input Leakage Current	V _{IN} =0 ~ V _{DD}		-	±1.0	μA
I _{LO}	Output Leakage Current	$\overline{CE}$ =V _{IH} , V _{OUT} =0V ~ V _{DD}		-	±5.0	μA
I _{OH}	Output High Current	V _{OH} =2.4V		-1.0	-	mA
I _{OL}	Output Low Current	V _{OL} =0.4V		3.2	-	mA
I _{DD} S1	Standby Current	$\overline{CE}$ =2.2V		-	2	mA
I _{DD} S2	Standby Current	$\overline{CE}$ =V _{DD} -0.2V		-	200	μA
I _{DD} O1	Operating Current	V _{IN} =V _{IH} /V _{IL} I _{OUT} =0mA	t _{cycle} =120ns	-	50	mA
t _{cycle} =150ns			-	45		
I _{DD} O2		V _{IN} =V _{DD} -0.2V/0.2V I _{OUT} =0mA	t _{cycle} =120ns	-	40	
			t _{cycle} =150ns	-	35	

CAPACITANCE

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
C _{IN}	Input Capacitance	f=1MHz, Ta=25°C	-	10	pF
C _{OUT}	Output Capacitance	f=1MHz, Ta=25°C	-	10	

Note: This parameter is periodically sampled and is not 100% tested.


AC CHARACTERISTICS (Ta=-40~70°C, V_{DD}=5V±10%)

SYMBOL	PARAMETER	120ns Version		150ns Version		UNIT
		MIN.	MAX.	MIN.	MAX.	
t _{cycle}	Cycle Time	120	-	150	-	ns
t _{ACC}	Access Time	-	120	-	150	
t _{CE}	Chip Enable Access Time	-	120	-	150	
t _{OE}	Output Enable Access Time	-	70	-	70	
t _{CED}	Output Disable Time from $\overline{CE}$	-	50	-	50	
t _{OED}	Output Disable Time from $\overline{OE}$	-	50	-	50	
t _{OH}	Output Hold Time	5	-	5	-	

AC TEST CONDITIONS

- Output Load : 100pF + 1TTL
- Input Levels : 0.6V, 2.4V
- Timing Measurement Reference Levels Input: 0.8V, 2.2V
Output: 0.8V, 2.0V
- Input Rise and Fall Time : 5ns

TIMING WAVEFORMS

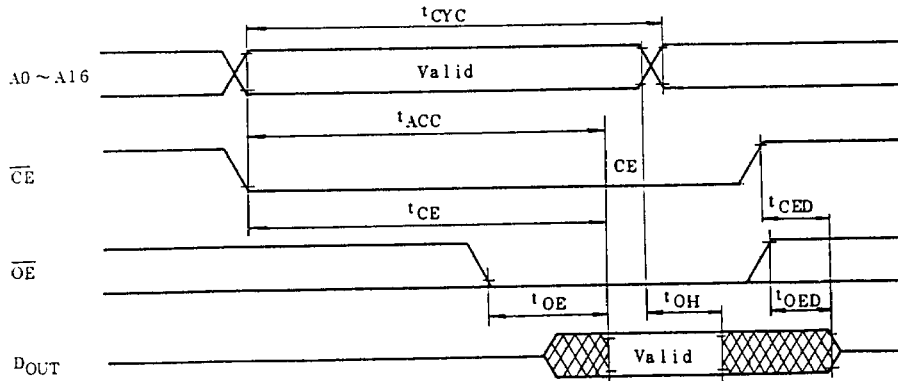

OPERATION MODE


MODE	$\overline{CE}$	$\overline{OE}$	A0 ~ 16	Outputs	Power
Read	L	L	Valid	Data Out	Operating
Standby	H	*	*	High-Z	Standby
Output Deselect	L	H	*	High-Z	Operating

H: V_{IH}, L: V_{IL}, *: V_{IH} or V_{IL}

OUTLINE DRAWINGS

Plastic DIP (DIP32-P-600)


Unit in mm

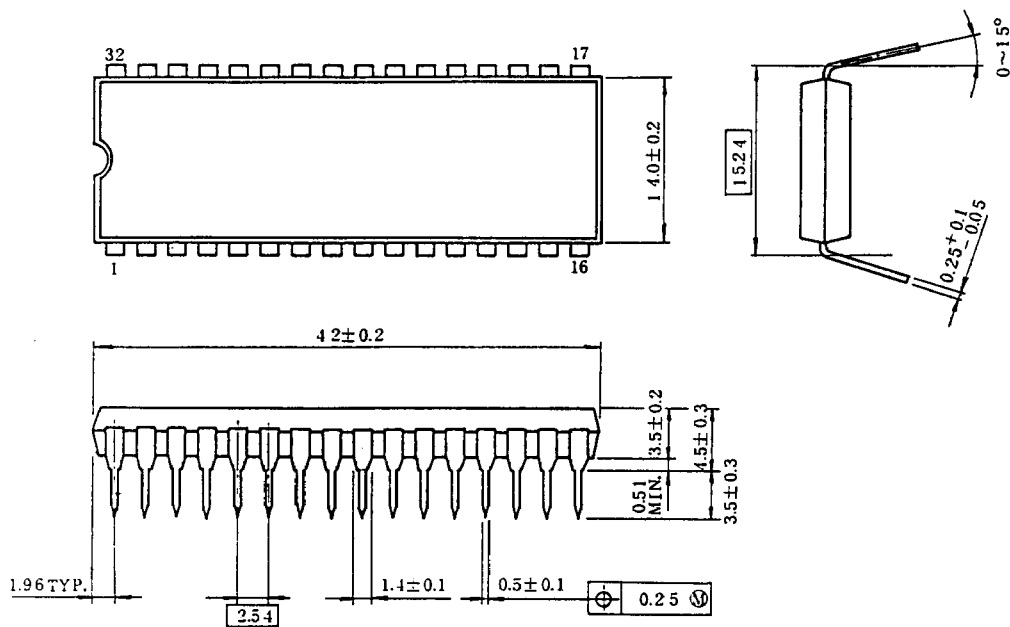

Note: Package width and length do not include mold protrusion, allowable mold protrusion is 0.15mm.

Plastic FP (SOP32-P-525)

Unit in mm

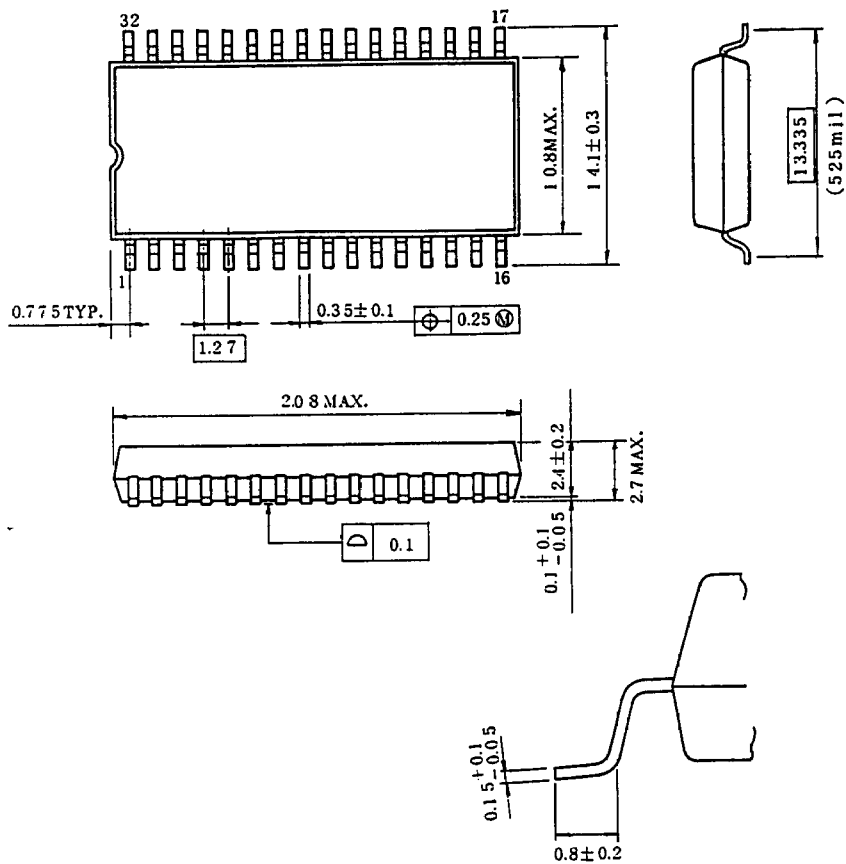

Note: Package width and length do not include mold protrusion, allowable mold protrusion is 0.15mm.

Copyright Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com