


CDD LINEAR IMAGE SENSOR

TCD102D

The TCD102D is a high resolution and high sensitivity 2048-element linear image sensor. The sensor is designed for Facsimile readers, optical character Recognition and other optical application ,The device contains a row of 2048 photodiodes which provide a 8 lines/mm resolution across a B4 size paper. The TCD102D is capable of high speed operation up to a 3MHz data rate and incorporate on hip sample and hold circuitry.

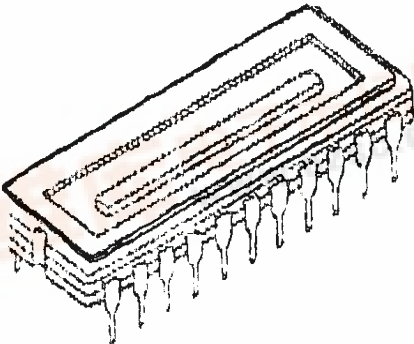


- Number of Image Sensing Elements : 2048
- Image Sensing Element Size : 14pm by 14pm on 14pm centers
- Photo Sensing Region : High sensitive an photodiode
- Clock : 2-phase
- On-ship circuitry : Sample-and-held circuitry
- Dynamic Range : 600(Type)
- Package : 22 pin Cerdip

MAXIMUM RATINGS (Note 1)

CHARACTERISTIC	SYMBOL	RATLNG	UNLT
Clock pulse voltage	Vo	-0.3-1.5	V
Shift pulse voltage	Vsh		
Reset pulse voltage	Vrs		
Sample and hold pulse voltage	Vsp		
Power supply voltage	Vop		
Input cate voltage	Vtg		
Input source voltage	Vts		
Operating temperature	Topr	-25-60	℃
Storage temperature	Tstg	-40-100	℃

(Note 1) All voltage are with respect to ss terminals.

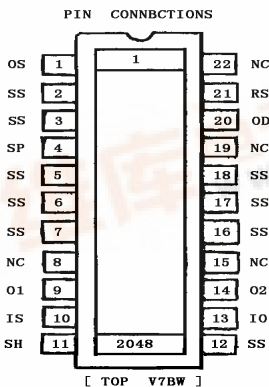

CCD LINEAR IMAGESENSOR SUNSTAR  
1999.09.12 JAPAN

