



NTE904 Integrated Circuit General Purpose Transistor Array (Two Isolated Transistors and a Darlington Connected Transistor Pair)

Description:

The NTE904 consists of four general purpose silicon NPN transistors on a common monolithic substrate in a 12-Lead TO5 type metal can. Two of the four transistors are connected in the Darlington configuration. The substrate is connected to a separate terminal for maximum flexibility.

The transistors of the NTE904 are well suited to a wide variety of applications in low power systems in the DC through VHF range. They may be used as discrete transistors in conventional circuits but in addition they provide the advantages of close electrical and thermal matching inherent in integrated circuit construction.

Features:

- Matched Monolithic General Purpose Transistors
- Current Gain Matched to $\pm 10\%$
- Base-Emitter Voltage Matched to $\pm 2\text{mV}$
- Operation from DC to 120MHz
- Wide Operating Current Range
- Low Noise Figure

Applications:

- General use in Signal Processing Systems in DC through VHF Range
- Custom Designed Differential Amplifiers
- Temperature Compensated Amplifiers

Absolute Maximum Ratings: ($T_A = +25^\circ\text{C}$ unless otherwise specified)




Collector-Emitter Voltage (Each Transistor), V_{CEO}	15V
Collector-Base Voltage (Each Transistor), V_{CBO}	30V
Collector-Substrate Voltage (Each Transistor, Note 1), V_{CIO}	40V
Emitter-Base Voltage (Each Transistor), V_{EBO}	5V
Collector Current (Each Transistor), I_C	50mA
Power Dissipation, P_D	
Any One Transistor	300mW
Total package	450mW
Derate Above 85°C	5mW/ $^\circ\text{C}$
Operating Temperature Range, T_{opr}	-55° to $+125^\circ\text{C}$
Storage Temperature Range, T_{stg}	-65° to $+150^\circ\text{C}$

Note 1. The collector of each transistor is isolated from the substrate by an integral diode. The substrate (Pin10) must be connected to the most negative point in the external circuit to maintain isolation between transistors and to provide for normal transistor action.

Electrical Characteristics: ($T_A = +25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Static Characteristics						
Collector Cutoff Current	I _{CBO}	V _{CB} = 10V, I _E = 0	–	0.002	–	nA
	I _{CEO}	V _{CE} = 10V, I _B = 0	–	–	0.5	μA
Collector Cutoff Current (Darlington Pair)	I _{CEOD}	V _{CE} = 10V, I _B = 0	–	–	5	μA
Collector–Emitter Breakdown Voltage	V _{(BR)CEO}	I _C = 1mA, I _B = 0	15	24	–	V
Collector–Base Breakdown Voltage	V _{(BR)CBO}	I _C = 10μA, I _E = 0	30	60	–	V
Emitter–Base Breakdown Voltage	V _{(BR)EBO}	I _E = 10μA, I _C = 0	5	7	–	V
Collector–Substrate Breakdown Voltage	V _{(BR)CIO}	I _C = 10μA, I _{C1} = 0	40	60	–	V
Collector–Emitter Saturation Voltage	V _{CE(sat)}	I _C = 10mA, I _B = 1mA	–	0.23	0.5	V
Static Forward Current Transfer Ratio	h _{FE}	V _{CE} = 3V, I _C = 10mA	50	100	–	
		V _{CE} = 3V, I _C = 1mA	60	100	200	
		V _{CE} = 3V, I _C = 10μA	54	–	–	
Magnitude of Static–Beta Ratio (Isolated Transistors Q ₁ and Q ₂)		V _{CE} = 3V, I _{C1} = I _{C2} = 1mA	0.9	0.97	–	
Static Forward Current Transfer Ratio (Darlington Pair Q ₃ and Q ₄)	h _{FED}	V _{CE} = 3V, I _C = 1mA	2000	5400	–	
		V _{CE} = 3V, I _C = 10μA	1000	2800	–	
Base–Emitter Voltage	V _{BE}	V _{CE} = 3V, I _E = 1mA	0.600	0.715	0.800	V
		V _{CE} = 3V, I _E = 10mA	–	0.800	0.900	V
Input Offset Voltage		V _{CE} = 3V, I _E = 1mA	–	0.48	2.0	mV
Temperature Coefficient of Base–Emitter Voltage (Q ₁ – Q ₂)		V _{CE} = 3V, I _E = 1mA	–	1.9	–	mV/°C
Base (Q ₃)–Emitter (Q ₄) Voltage Darlington Pair	V _{BED}	V _{CE} = 3V, I _E = 10mA	–	1.46	1.60	V
		V _{CE} = 3V, I _E = 1mA	1.10	1.32	1.50	V
Temperature Coefficient of Base–Emitter Voltage (Darlington Pair Q ₃ –Q ₄)		V _{CE} = 3V, I _E = 1mA	–	4.4	–	mV/°C
Temperature Coefficient of Magnitude of Input Offset Voltage		V _{CC} = 6V, V _{EE} = –6V, I _{C1} = I _{C2} = 1mA	–	10	–	μV/°C
Low Frequency Noise Figure	NF	V _{CE} = 3V, I _C = 100μA, f = 1kHz, R _S = 1kΩ	–	3.25	–	dB
Low Frequency, Small–Signal Equivalent Circuit Characteristics						
Forward Current Transfer Ratio	h _{fe}	V _{CE} = 3V, I _C = 1mA, f = 1kHz	–	110	–	
Short–Circuit Input Impedance	h _{ie}		–	3.5	–	kΩ
Open–Circuit Output Impedance	h _{oe}		–	15.6	–	μmhos
Open–Circuit Reverse Voltage Transfer Ratio	h _{re}		1.8 x 10 ⁴ (Typ)			
Admittance Characteristics						
Forward Transfer Admittance	Y _{fe}	V _{CE} = 3V, I _C = 1mA, f = 1kHz	31–j1.5 (Typ)			mmho
Input Admittance	Y _{ie}		0.3+j0.04 (Typ)			mmho
Output Admittance	Y _{oe}		0.001+j0.03 (Typ)			mmho
Gain–Bandwidth Product	f _T	V _{CE} = 3V, I _C = 3mA	300	500	–	MHz
Emitter–Base Capacitance	C _{EB}	V _{EB} = 3V, I _E = 0	–	0.6	–	pF
Collector–Base Capacitance	C _{CB}	V _{CB} = 3V, I _C = 0	–	0.58	–	pF
Collector–Substrate Capacitance	C _{CI}	V _{CI} = 3V, I _C = 0	–	2.8	–	pF

Pin Connection Diagram (Top View)

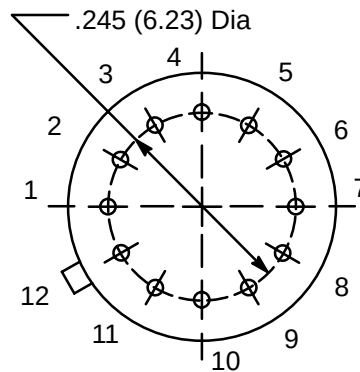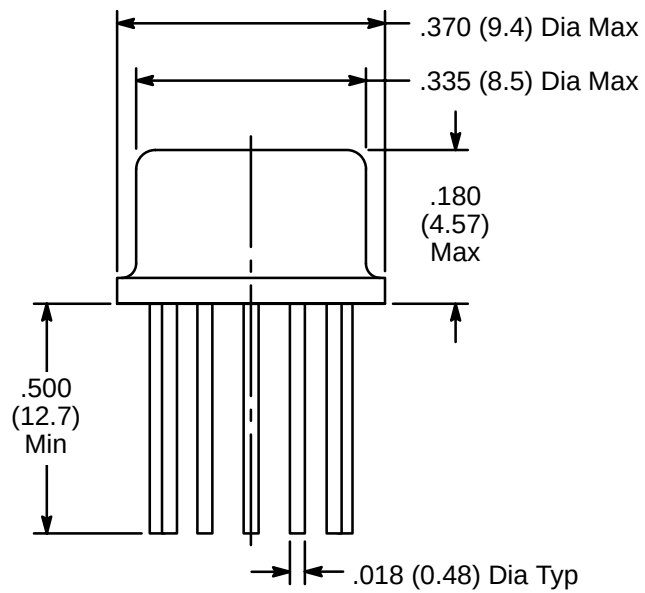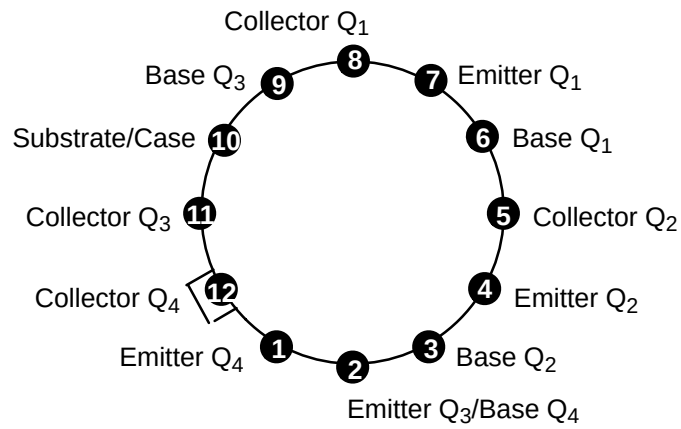

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com