



## NTE932 Integrated Circuit 3-Terminal Positive Voltage Regulator 5V, 5A

### Description:

The NTE932 is a 3-terminal fixed positive voltage regulator in a TO3 type package designed for use in applications requiring a well regulated positive output voltage. Outstanding features include full power usage up to 5A of load current, internal current limiting, thermal shutdown, and safe area protection on the chip, providing protection of the series pass Darlington, under most operating conditions. A low-noise, temperature stable band gap reference is the key design factor insuring excellent temperature regulation. This, coupled to a very low output impedance, insures superior load regulation.

### Features:

- Guaranteed Power Dissipation: 50W @  $T_C = +80^\circ\text{C}$
- Guaranteed Input–Output Differential
- Low Noise, Band Gap Reference
- Remote Sense Capability
- Sample Power Cycled Burn–In
- Guaranteed Thermal Resistance, Junction–to–Case:  $0.9^\circ\text{C}/\text{W}$

### Absolute Maximum Ratings:

Input Voltage (Note 1), $V_{IN}$ .....	30V
Power Dissipation, $P_D$ .....	Internally Limited
Derates Above $80^\circ\text{C}$ .....	$1.111\text{W}/^\circ\text{C}$
Operating Junction Temperature Range, $T_J$ .....	$-55^\circ$ to $+150^\circ\text{C}$
Storage Temperature Range, $T_{stg}$ .....	$-65^\circ$ to $+150^\circ\text{C}$
Typical Thermal Resistance, Junction–to–Case, $R_{thJC}$ .....	$0.9^\circ\text{C}/\text{W}$
Lead Temperature (Soldering, 60sec), $T_L$ .....	$+300^\circ\text{C}$
Burn–In In Thermal Limit .....	100%

Note 1. Short circuit protection is only assured to  $V_{IN\max}$ . In case of short circuit, with input–output voltages approaching  $V_{IN\max}$ , regulator may require the removal of the input voltage to restart.

**Electrical Characteristics:** ( $T_J = 0^\circ$  to  $+125^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage	$V_O$	$T_J = +25^\circ\text{C}$ , $V_{IN} = 8\text{V}$ to $15\text{V}$ , $I_O = 10\text{mA}$ to $5\text{A}$ , Note 2	4.75	5.00	5.25	V
Input–Output Voltage Differential	$V_{IN}-V_O$	$I_O = 5\text{A}$	2.6	—	—	V
Line Regulation	$\text{Reg}_{\text{line}}$	$T_J = +25^\circ\text{C}$ , $V_{IN} = 8\text{V}$ to $20\text{V}$ , $I_O = 3\text{A}$ , Note 3	—	—	1.0	%/ $V_O$
Load Regulation	$\text{Reg}_{\text{load}}$	$T_J = +25^\circ\text{C}$ , $V_{IN} = 8\text{V}$ , $I_O = 10\text{mA}$ to $5\text{A}$ , Note 3	—	—	0.6	%/ $V_O$
Quiescent Current	$I_Q$	$T_J = +25^\circ\text{C}$ , $V_{IN} = 8\text{V}$ , $I_O = 10\text{mA}$	—	—	25	mA
Quiescent Current, Line	$I_{Q(\text{Line})}$	$T_J = +25^\circ\text{C}$ , $V_{IN} = 8\text{V}$ to $15\text{V}$ , $I_O = 10\text{mA}$	—	—	5	mA
Quiescent Current, Load	$I_{Q(\text{Load})}$	$T_J = +25^\circ\text{C}$ , $V_{IN} = 8\text{V}$ , $I_O = 10\text{mA}$ to $5\text{A}$	—	—	5	mA
Current Limit	$I_{\text{LIM}}$	$T_J = +25^\circ\text{C}$ , $V_{IN} = 10\text{V}$ , Note 2	—	—	15	A
Temperature Coefficient	$T_C$	$V_{IN} = 8\text{V}$ , $I_O = 100\text{mA}$	—	—	5	mA
Output Noise Voltage	$V_n$	$V_{IN} = 8\text{V}$ , $I_O = 100\text{mA}$ , $f = 10\text{Hz}$ to $100\text{kHz}$	—	—	10	$\mu\text{V}_{\text{rms}}$
Ripple Attenuation	$R_A$	$V_{IN} = 10\text{V}$ , $I_O = 2\text{A}$	60	—	—	dB
Power Dissipation	$P_D$	$2.6\text{V}$ to $10\text{V}$ ( $V_{IN} - V_O$ ), $I_O = 10\text{mA}$ to $5\text{A}$	—	—	50	W


Note 2. Low duty cycle pulse testing with Kelvin connections required. Die temperature changes must be accounted for separately.

Note 3. Ripple attenuation is specified for a  $1\text{V}_{\text{rms}}$ ,  $120\text{Hz}$ , input ripple. Ripple attenuation is minimum of  $60\text{dB}$  at  $5\text{V}$  output and is  $1\text{dB}$  less for each volt increase in the output voltage.

Note 4.  $V_O = V_C (1 + R1/R2)$  where:

R1 = Resistance from output to control

R2 = Resistance from control to common

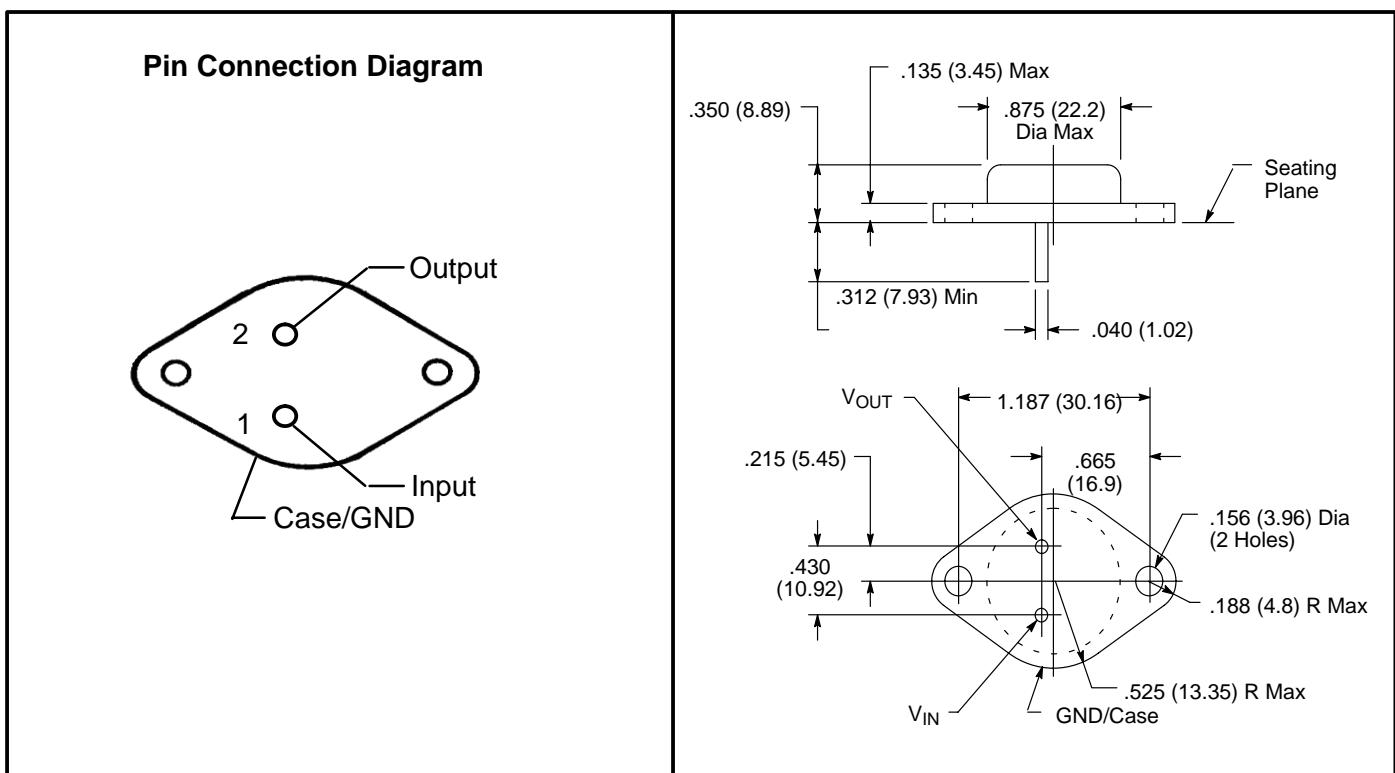

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

[www.AllDataSheet.com](http://www.AllDataSheet.com)

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

[www.AllDataSheet.com](http://www.AllDataSheet.com)