



NTE959 Linear Integrated Circuit Voltage Regulator, Negative, -18V, 1A

Description:

The NTE959 voltage regulator employs current limiting, thermal shutdown, and safe-area compensation which makes it remarkably rugged under most operating conditions. With adequate heat-sinking they can deliver output currents in excess of 1.0 amperes.

Features:

- No External Components Required
- Internal Thermal Overload Protection
- Internal Short-Circuit Current Limiting
- Output Transistor Safe-Area Compensation

Absolute Maximum Ratings: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Input Voltage, V_{IN}		-35V
Internal Power Dissipation, P_D		Internally Limited
Derate Above $+25^\circ\text{C}$		15.4mW/ $^\circ\text{C}$
Internal Power Dissipation ($T_C = +25^\circ\text{C}$), P_D		Internally Limited
Derate Above $+75^\circ\text{C}$		200mW/ $^\circ\text{C}$
Maximum Junction Temperature Range, T_J		-55° to $+150^\circ\text{C}$
Storage Temperature Range, T_{stg}		-65° to $+150^\circ\text{C}$
Thermal Resistance, Junction-to-Ambient, R_{thJA}		65 $^\circ\text{C/W}$
Thermal Resistance, Junction-to-Case, R_{thJC}		5 $^\circ\text{C/W}$


Electrical Characteristics: ($V_{IN} = -27\text{V}$, $I_O = 500\text{mA}$, $T_J = 0^\circ$ to $+125^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage	V_O	$T_J = +25^\circ\text{C}$	-17.3	-18.0	-18.7	V
		$5\text{mA} \leq I_O \leq 1\text{A}$, $P_O \leq 15\text{W}$, $-33\text{V} \leq V_{IN} \leq -21\text{V}$	-17.1	-18.0	-18.9	V
Line Regulation	Reg_{Line}	$T_J = +25^\circ\text{C}$, Note 1	$-33\text{V} \leq V_{IN} \leq -21\text{V}$	—	25	360
			$-30\text{V} \leq V_{IN} \leq -24\text{V}$	—	10	180
Load Regulation	Reg_{Load}	$T_J = +25^\circ\text{C}$, Note 1	$5\text{mA} \leq I_O \leq 1.5\text{A}$	—	55	360
			$250\text{mA} \leq I_O \leq 750\text{mA}$	—	22	180

Electrical Characteristics: ($V_{IN} = -27V$, $I_O = 500mA$, $T_J = 0^{\circ}$ to $+125^{\circ}C$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Quiescent Current	I_B	$T_J = +25^{\circ}C$	–	4.5	8.0	mA
Quiescent Current Change	ΔI_B	$-33V \leq V_{IN} \leq -21V$	–	–	1.0	mA
		$5mA \leq I_O \leq 1A$	–	–	0.5	
Ripple Rejection	RR	$32V \leq V_{IN} \leq 21V$, $f = 120Hz$	–	57	–	dB
Dropout Voltage	$V_{IN} - V_O$	$T_J = +25^{\circ}C$, $I_O = 1A$	–	2.0	–	V
Output Noise Voltage	V_n	$T_A = +25^{\circ}C$, $10Hz \leq f \leq 100kHz$	–	10	–	$\mu V/V_O$
Output Resistance	r_O	$f = 1kHz$	–	19	–	$m\Omega$
Short-Circuit Current Limit	I_{sc}	$T_A = +25^{\circ}C$, $V_{IN} = 35V$	–	0.2	–	A
Peak Output Current	I_{max}	$T_J = +25^{\circ}C$	–	2.2	–	A
Average Temperature Coefficient of Output Voltage	TCV_O		–	-1.1	–	$mV/^{\circ}C$

Note 1. Load and line regulation are specified at constant junction temperature. Changes in V_O due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

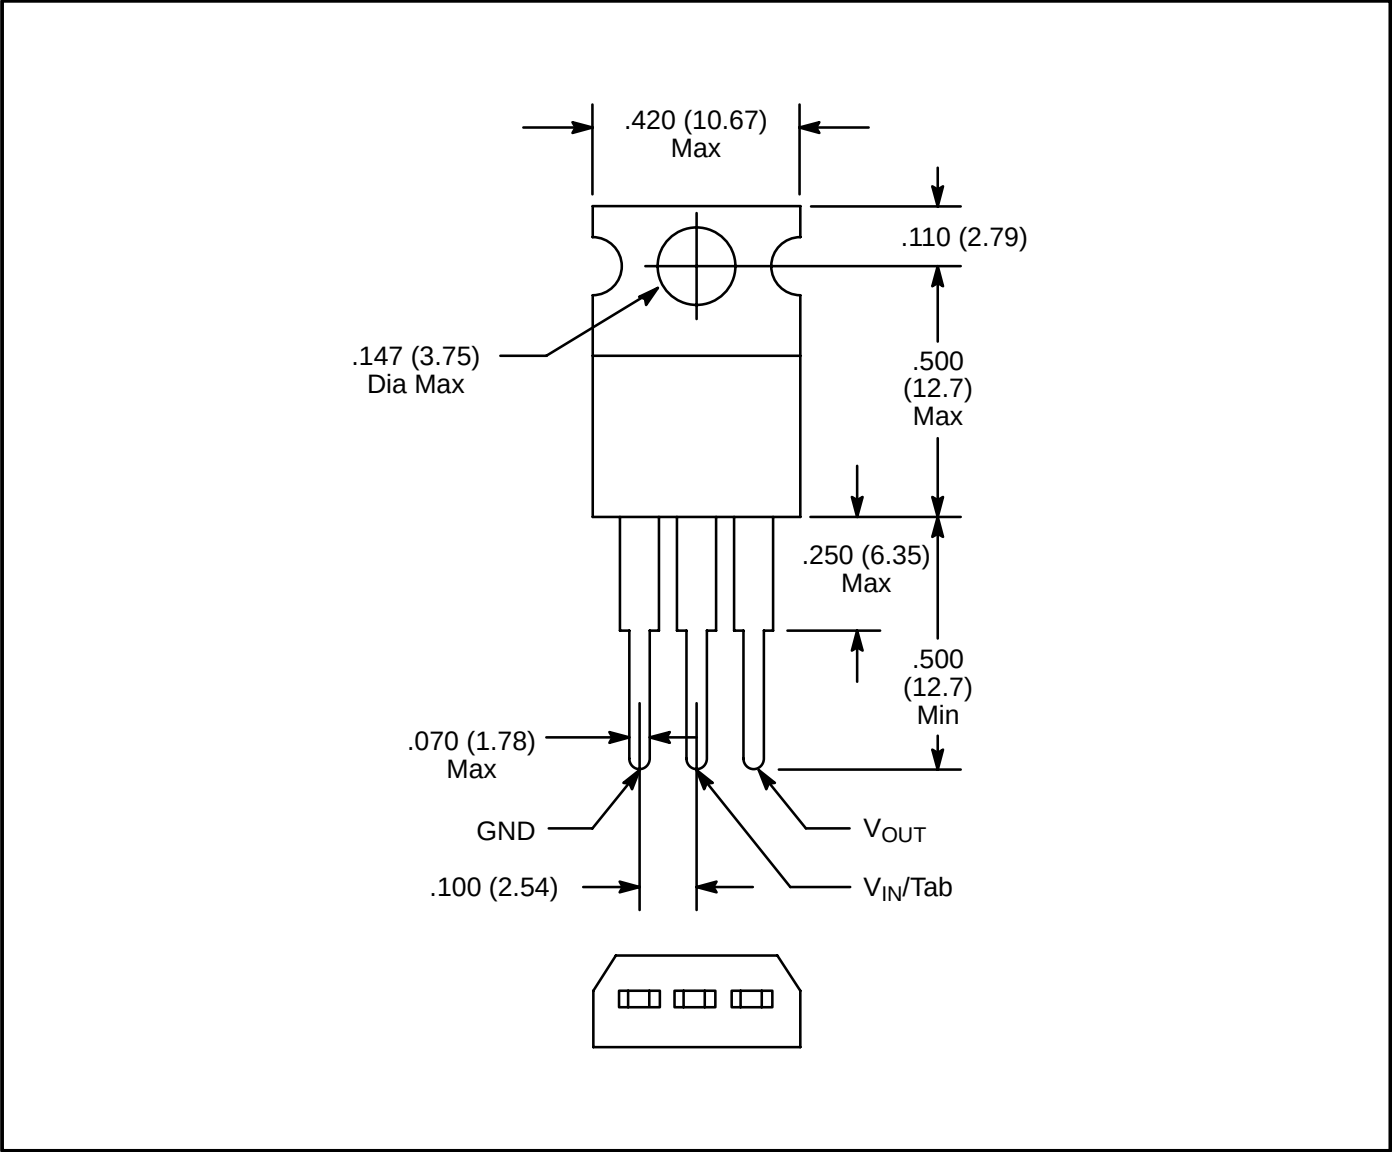

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com