

TOSHIBA SOLID STATE I/O INTERFACE MODULE


**TF1109**

DC OUTPUT MODULE

Unit in mm

TOSHIBA TF1109 is DC 24V Line Controlled I/O Interface Module and it includes the optical isolator. Using this Module, you can design high reliability and compact system.

- DC Load Current :  $I_O = 1A$  (Max.)
- Recommended DC Load Voltage :  $V_O = 10 \sim 30V$  DC
- Recommended Control Input Voltage :  $V_{F(IN)} = 5V$
- 1500V AC Optical Isolation
- Including Surge Voltage Suppressor
- Input is Compatible with TTL Logic
- Small Size and Light Weight

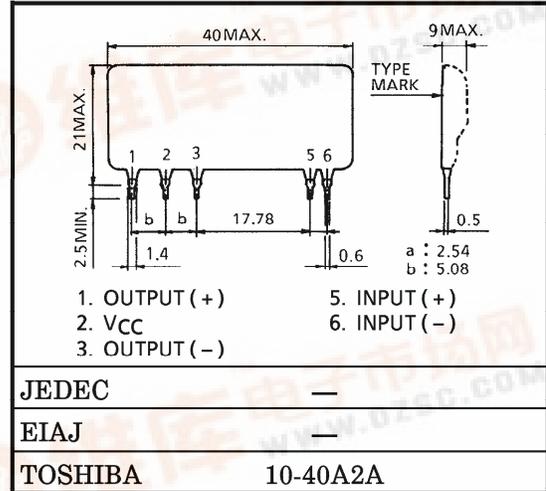

MAXIMUM RATINGS (Ta = 25°C)  
INPUT (CONTROL)

Weight : 7.5g


CHARACTERISTIC	SYMBOL	RATING	UNIT
Control Input Voltage (DC) (Note 1)	$V_{F(IN)}$	6	V
Control Input Current	$I_{F(IN)}$	2	mA
Reverse Voltage (DC)	$V_{R(IN)}$	5	V

OUTPUT (DC LOAD)

Output Load Voltage	$V_O$	35	V
Output Supply Voltage	$V_{CC}$	35	V
Output Load Current	DC	$I_O$	1
	10ms	$I_{OP}$	2
Operating Frequency Range	f	65	Hz
Isolation Voltage (Input-Output) (AC)	$BV_S / AC$	1500 (1min)	V
Operating Temperature Range	$T_{opr}$	-20~80	°C
Storage Temperature Range	$T_{stg}$	-20~80	°C
Lead Soldering Temperature (10s)	$T_{sol}$	260	°C

Note 1 : Driving input rating : Insert an external resistance into I/O when the power supply over 6V is used.


MARK

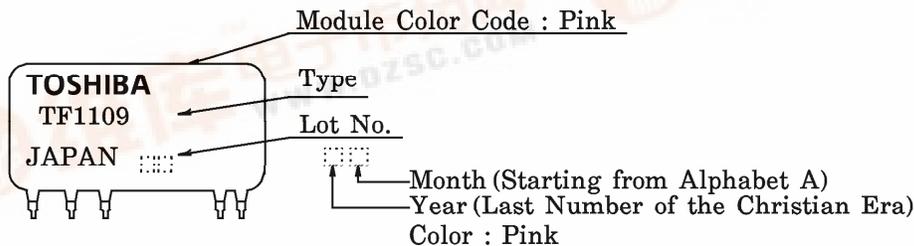

961001EBA2

TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

**BLOCK DIAGRAM**

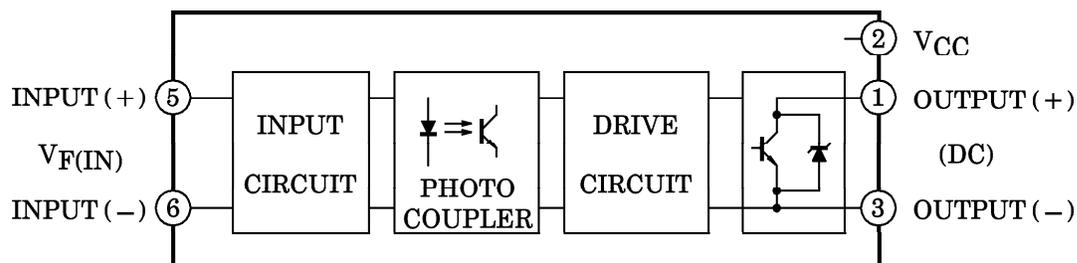


**ELECTRICAL CHARACTERISTICS (Ta = 25°C, V<sub>CC</sub> = 24V)**  
**INPUT (CONTROL)**

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Pick Up Voltage	V <sub>FT</sub>	V <sub>O</sub> = 24V, I <sub>O</sub> = 1A	—	2.3	4.5	V
Drop Out Voltage	V <sub>FD</sub>	Resistive Load	0.6	1.5	—	
Input Resistance	R <sub>IN</sub>	—	—	3	—	kΩ

**OUTPUT (DC LOAD)**

Off-State Leakage Current	I <sub>OD</sub>	V <sub>O</sub> = 24V	—	—	0.5	mA
Peak On-State Voltage	V <sub>SAT</sub>	I <sub>O</sub> = 1A, V <sub>F(IN)</sub> = 5V, V <sub>O</sub> = 24V	—	0.45	0.65	V
Breakdown Voltage	V <sub>BR</sub>	I <sub>OD</sub> = 9mA, 3pin to 1pin	35	—	40	V
Turn-On Time	t <sub>on</sub>	V <sub>F(IN)</sub> = 0 → 5V V <sub>O</sub> = 24V, I <sub>O</sub> = 1A, Resistive Load	—	20	100	μs
Turn-Off Time	t <sub>off</sub>	V <sub>F(IN)</sub> = 5 → 0V V <sub>O</sub> = 24V, I <sub>O</sub> = 1A, Resistive Load	—	0.5	1	ms
Isolation Resistance	R <sub>S</sub>	V = 1kV, R.H = 40~60%	—	10 <sup>10</sup>	—	Ω

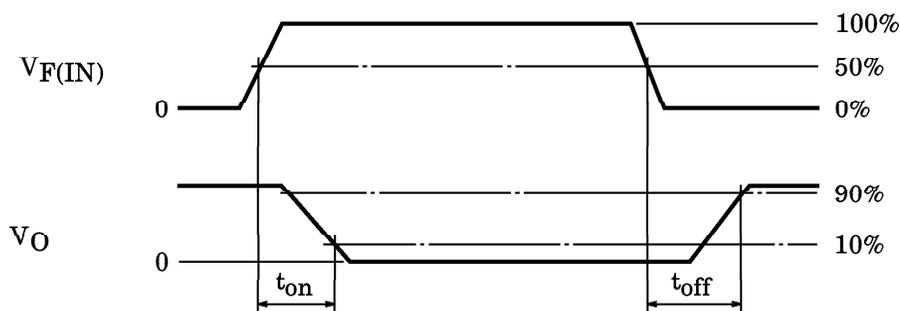

**Fig.1 SWITCHING TIME TEST CONDITION**

● The products described in this document are subject to foreign exchange and foreign trade control laws.  
 ● The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.  
 ● The information contained herein is subject to change without notice.

