


MONOLITHIC CONSTRUCTION WITH BUILT IN  
BASE-EMITTER SHUNT RESISTORS INDUSTRIAL USE.

#### FEATURES


- High DC Current Gain.  
:  $h_{FE}=1000(\text{Min.})$ , @  $V_{CE}=4V$ ,  $I_C=1A$ .
- Low Collector-Emitter Saturation Voltage.
- Complementary to TIP117F.

#### MAXIMUM RATING (Ta=25 °C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage		$V_{CB0}$	100	V
Collector-Emitter Voltage		$V_{CE0}$	100	V
Emitter-Base Voltage		$V_{EBO}$	5	V
Collector Current	DC	$I_C$	2	A
	Pulse	$I_{CP}$	4	
Base Current	DC	$I_B$	50	mA
Collector Power Dissipation	Ta=25 °C	$P_C$	2	W
	Tc=25 °C		20	
Junction Temperature		$T_j$	150	°C
Storage Temperature Range		$T_{stg}$	-65 ~ 150	°C

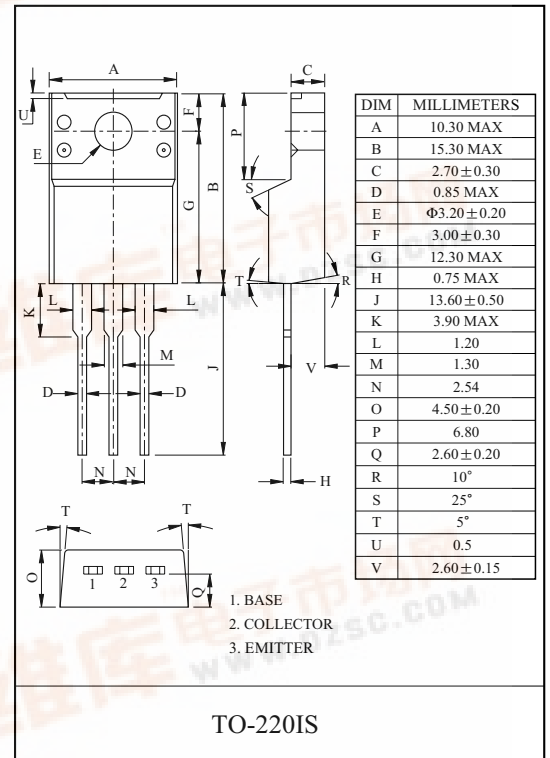

#### EQUIVALENT CIRCUIT

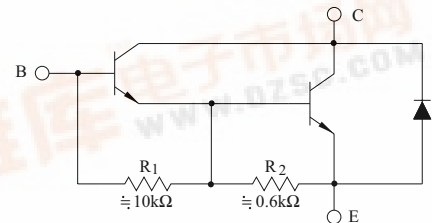

#### ELECTRICAL CHARACTERISTICS (Ta=25 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	$I_{CEO}$	$V_{CE}=50V, I_B=0$	-	-	2	mA
	$I_{CBO}$	$V_{CB}=100V, I_E=0$	-	-	1	
Emitter Cut-off Current	$I_{EBO}$	$V_{EB}=5V, I_C=0$	-	-	2	mA
DC Current Gain	$h_{FE}$	$V_{CE}=4V, I_C=1A$	1000	-	-	
		$V_{CE}=4V, I_C=2A$	500	-	-	
Collector-Emitter Sustaining Voltage	$V_{CE0(SUS)}$	$I_C=30mA, I_B=0$	100	-	-	V
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=2A, I_B=8mA$	-	-	2.5	V
Base-Emitter On Voltage	$V_{BE(ON)}$	$V_{CE}=4V, I_C=2A$	-	-	2.8	V
Collector Output Capacitance	$C_{ob}$	$V_{CB}=10V, I_E=0, f=0.1MHz$	-	-	100	pF

# TIP112F

