



TK10415

CERAMIC SPEAKER DRIVE AMPLIFIER

FEATURES

- Wide Operating Voltage Range ($V_{CC} = 1.8$ to 5.5 V)
- Very Low Supply Current ($I_{CC} = 1.8$ mA @ $V_{CC} = 2.4$ V)
- Very Low Standby Current ($I_{STBY} = 0.1$ μ A)
- Miniature Package (SOT23L-6)
- Very Large Output Voltage ($V_{OUT(MAX)} = 1.7$ Vrms @ $V_{CC} = 2.4$ V, $R_L = 620$ Ω)
- Very Small Total Harmonic Distortion (THD = 0.1 % @ $V_{OUT} = 0.8$ Vrms)
- Needs No Output Coupling Capacitor

DESCRIPTION

The TK10415M is a very low operating voltage and current audio power amplifier to drive ceramic speakers.

The TK10415M drives the speaker directly, because the device has a differential output that does not need an output coupling capacitor.

The voltage gain is adjustable by two external resistors.


The TK10415M is available in the very small SOT23L-6 surface mount package.

The small package in conjunction with few external components saves printed circuit board space.


APPLICATIONS

- Speaker Driver for Portable Equipment
- Headphone Driver
- Toys and Games

TK10415

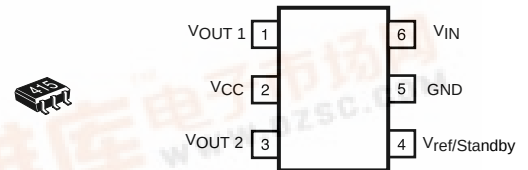

BLOCK DIAGRAM

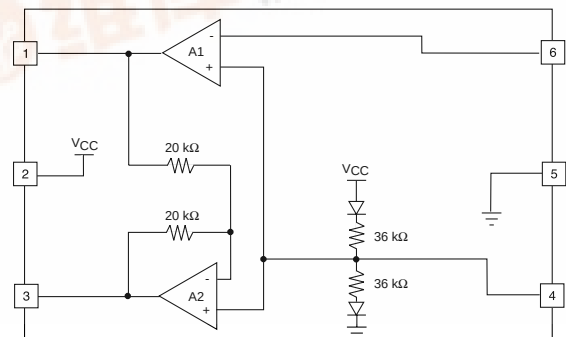

ORDERING INFORMATION

TK10415M

Tape/Reel Code

TAPE/REEL CODE
TL: Tape Left



TK10415

ABSOLUTE MAXIMUM RATINGS

Supply Voltage 6 V
 Operating Voltage 1.8 to 5.5 V
 Power Dissipation (Notes 1 and 2) 400 mW

Storage Temperature Range -55 to +150 °C
 Operating Temperature Range -20 to +70 °C

TK10415 ELECTRICAL CHARACTERISTICS


Test Conditions: $V_{CC} = 2.4 \text{ V}$, $f = 1.0 \text{ kHz}$, $R_L = 620 \Omega$, $T_A = 25 \text{ °C}$, unless otherwise specified.

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_{CC}	Supply Current	$V_{CC} = 2.4 \text{ V}$, $R_L = \infty$		1.8	3.0	mA
		$V_{CC} = 5.0 \text{ V}$, $R_L = \infty$		2.2	3.5	mA
I_{STBY}	Standby Supply Current	$V_{CC} = 2.4 \text{ V} = \text{Pin 4}$, $R_L = \infty$		0.0	2.0	μA
I_{CONT}	Control Terminal Current	Pin 4 Sink Current, $V_{Pin4} = V_{CC}$		53.0	90.0	μA
V_{THS}	Standby Threshold Voltage	Pin 4	$V_{CC} - 0.4$			V
G_{VO}	Open Circuit Voltage Gain	AMP1		60.0		dB
G_V	Voltage Gain	AMP1	17.0	20.0	23.0	dB
		AMP2	-3.0	0.0	3.0	dB
		AMP1 + AMP2	23.0	26.0	29.0	dB
THD	Total Harmonic Distortion	$V_{CC} = 2.4 \text{ V}$, $V_{OUT} = 0.8 \text{ V}_{rms}$		0.1	1.0	%
		$V_{CC} = 5.0 \text{ V}$, $V_{OUT} = 2.0 \text{ V}_{rms}$		0.1	1.0	%
$V_{OUT(MAX)}$	Maximum Output Voltage	$V_{CC} = 2.4 \text{ V}$, THD $\leq 10\%$	1.2	1.7		V_{rms}
		$V_{CC} = 5.0 \text{ V}$, THD $\leq 10\%$	2.6	3.7		V_{rms}
RR	Ripple Rejection Ratio	$C_{ref} = 33 \mu\text{F}$		38.0		dB
$V_{OUT(DC)}$	DC Voltage at Output Terminal	V_{OUT1}	1.00	1.20	1.40	V
		V_{OUT2}	1.00	1.20	1.40	V
$V_{OUT(OS)}$	Output Offset Voltage	$V_{OUT2} - V_{OUT1}$	-30.0	0.0	30.0	mV
R_L	Load Resistance		100	620		Ω

Note 1: Power dissipation is 400 mW in free air. Derate at 3.2 mW/°C for operation above 25 °C.





Note 2: Power dissipation is 600 mW when mounted. Derate at 4.8 mW/°C for operation above 25 °C.

TEST CIRCUIT

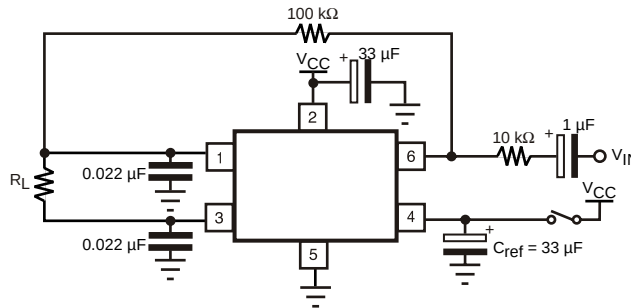







TYPICAL PERFORMANCE CHARACTERISTICS

$V_{CC} = 5\text{ V}$, $T_A = 25\text{ }^{\circ}\text{C}$, unless otherwise specified.

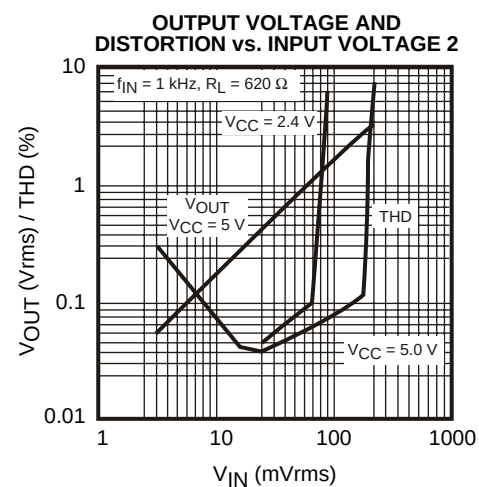
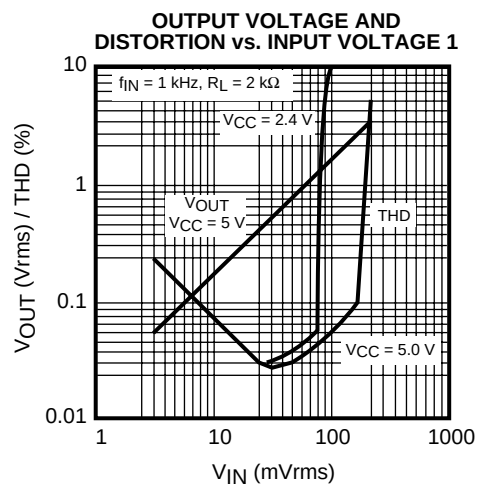
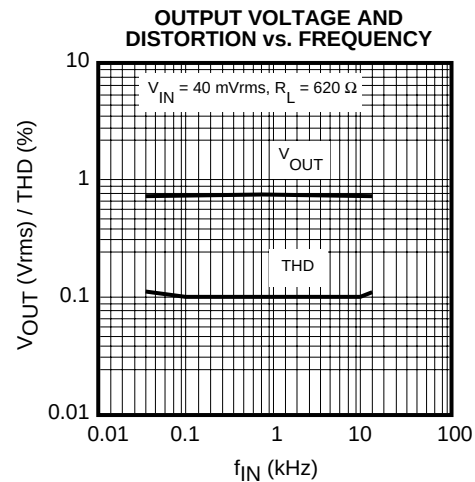
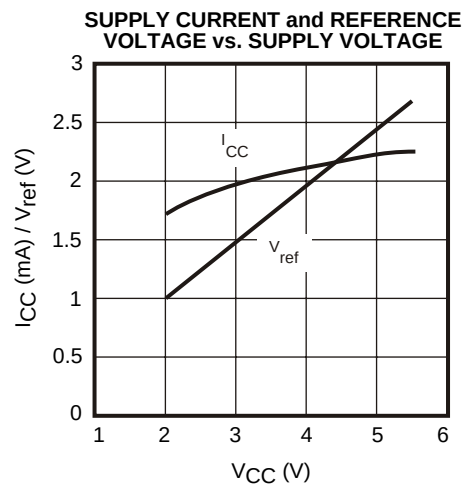


TYPICAL PERFORMANCE CHARACTERISTICS (CONT.)

$V_{CC} = 5\text{ V}$, $T_A = 25\text{ }^\circ\text{C}$, unless otherwise specified.

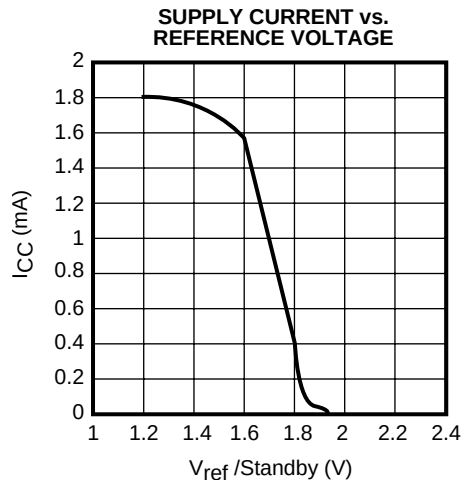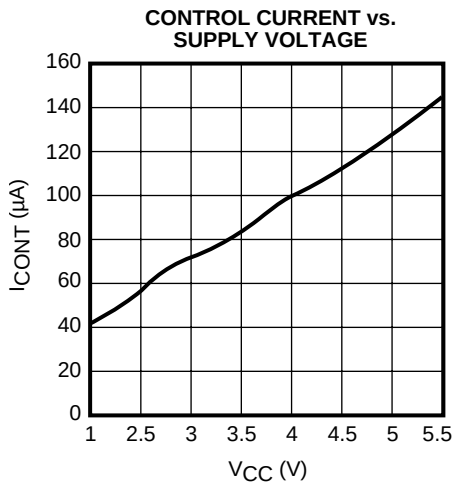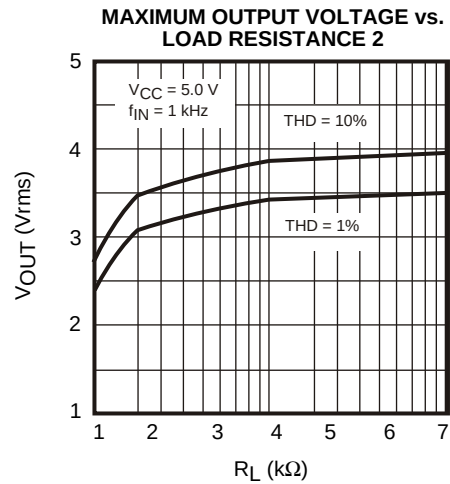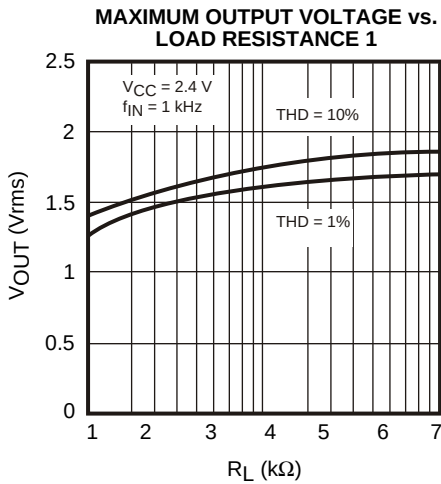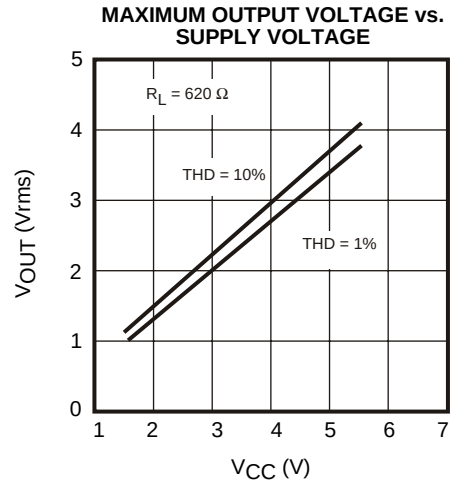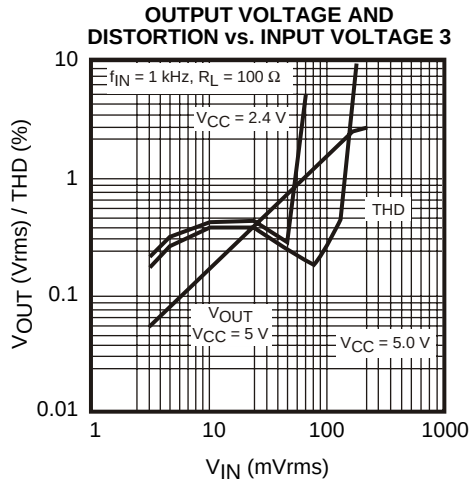

PIN FUNCTION DESCRIPTIONS

PIN NO.	SYMBOL	TERMINAL VOLTAGE (V)	INTERNAL EQUIVALENT CIRCUIT	DESCRIPTION
1	V_{OUT1}	$1/2 V_{CC}$		A1 amplifier output terminal
2	V_{CC}	V_{CC}	—	Supply input terminal
3	V_{OUT2}	$1/2 V_{CC}$		A2 amplifier output terminal
4	V_{ref}	$1/2 V_{CC}$		Reference voltage terminal. When this terminal is V_{CC} , the device is in the standby mode and the supply current is down to under 0.1 μA .
5	GND	0 V		Ground terminal.
6	V_{IN}	$1/2 V_{CC}$		A1 amplifier input terminal.

TK10415





NOTES

NOTES

TK10415

PACKAGE OUTLINE

SOT-23L-6(a) (SOT-23L)

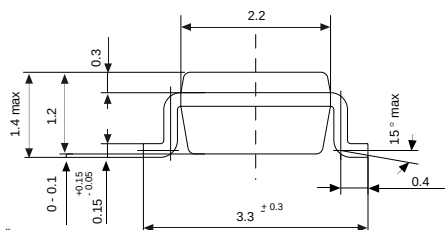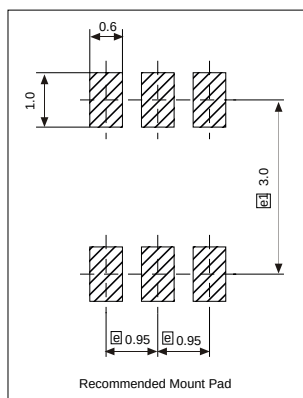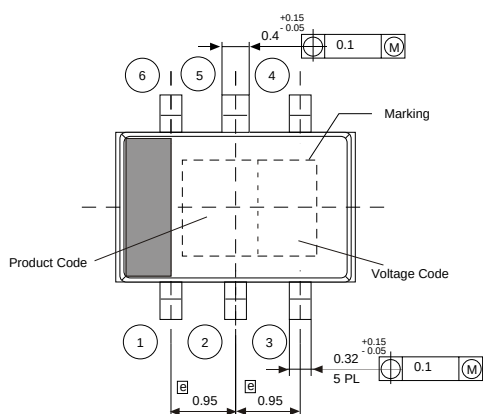

Dimensions are shown in millimeters
Tolerance: x.x ± 0.2 mm (unless otherwise specified)

Marking Information

TK10415

Marking
415



Toko America, Inc. Headquarters
1250 Feehanville Drive, Mount Prospect, Illinois 60056
Tel: (847) 297-0070 Fax: (847) 699-7864

TOKO AMERICA REGIONAL OFFICES

Midwest Regional Office
Toko America, Inc.
1250 Feehanville Drive
Mount Prospect, IL 60056
Tel: (847) 297-0070
Fax: (847) 699-7864

Western Regional Office
Toko America, Inc.
2480 North First Street, Suite 260
San Jose, CA 95131
Tel: (408) 432-8281
Fax: (408) 943-9790

Eastern Regional Office
Toko America, Inc.
107 Mill Plain Road
Danbury, CT 06811
Tel: (203) 748-6871
Fax: (203) 797-1223

Semiconductor Technical Support
Toko Design Center
4755 Forge Road
Colorado Springs, CO 80907
Tel: (719) 528-2200
Fax: (719) 528-2375

Visit our Internet site at <http://www.tokoam.com>

The information furnished by TOKO, Inc. is believed to be accurate and reliable. However, TOKO reserves the right to make changes or improvements in the design, specification or manufacture of its products without further notice. TOKO does not assume any liability arising from the application or use of any product or circuit described herein, nor for any infringements of patents or other rights of third parties which may result from the use of its products. No license is granted by implication or otherwise under any patent or patent rights of TOKO, Inc.