



TK11034

TEMPERATURE SENSOR IC

FEATURES

- Linear Output Voltage 10 mV/°C Output
- Active High On/Off Control
- 2.4 to 8.0 V Supply Range
- Miniature Package (SOT-23L)
- Minimum External Parts Count
- Low Power Consumption

DESCRIPTION

The TK11034 is a temperature sensor IC with a linear output of 10 mV/°C over the range of -30 to +105 °C. Its wide operating voltage range of 2.4 to 8.0 V makes it suitable for a number of applications requiring accurate temperature control, such as electronic thermostats for climate control, refrigerators, and industrial process controls. The device is in the "on" state when the control pin is pulled to a logic high level.

A typical application is to make a digital representation of temperature with an A/D converter, or to make a thermal detector with a comparator.


The TK11034 has a compensation pin for a 0.1 μF capacitor that ensures stability over the IC's operating temperature range.

The TK11034 is available in a miniature SOT-23L surface mount package.

APPLICATIONS

- Home and Industrial Thermostats
- Automotive Climate Control
- Battery Charger Temperature Monitor
- Notebook Computer Temperature Monitor
- Electronic Thermometers
- Fish Finder Water Temperature
- Industrial Process Controllers
- Home Appliance Temperature Control

TK11034

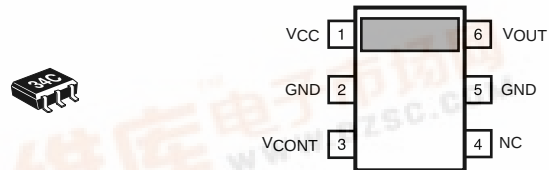

Note: Both GND pins must connect to GND

ORDERING INFORMATION


TK11034M



Tape/Reel Code

TAPE/REEL CODE
TL: Tape Left

BLOCK DIAGRAM

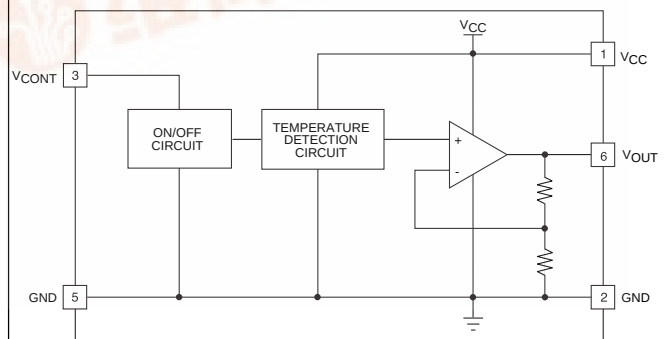

TK11034

ABSOLUTE MAXIMUM RATINGS

Supply Voltage 12 V
Operating Voltage 2.4 to 8 V
Power Dissipation (Note 1) 200 mW
Junction Temperature 150 °C

Storage Temperature Range -55 to +150 °C
Operating Temperature Range -30 to +105 °C
Lead Soldering Temperature (10 s) 235 °C

TK11034 ELECTRICAL CHARACTERISTICS

Test Conditions: $V_{CC} = 3.0\text{ V}$, $V_{CONT} = 2.4\text{ V}$, $I_{OUT} = 0\text{ }\mu\text{A}$, $T_A = 25\text{ }^\circ\text{C}$, unless otherwise specified.


SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
V_{OUT}	Output Voltage	$T_A = 25\text{ }^\circ\text{C}$	965	995	1025	mV
		$T_A = 85\text{ }^\circ\text{C}$	1573	1613	1653	mV
		$T_A = -30\text{ }^\circ\text{C}$		428.5		mV
T_C	Temperature Coefficient	$T_A = 25\text{ }^\circ\text{C}$ to $85\text{ }^\circ\text{C}$	9.5	10.3	11.1	mV/ $^\circ\text{C}$
Line Reg	Line Regulation	$V_{CC} = 3$ to 8 V	-20	5	20	mV
Load Reg	Load Regulation	$I_{OUT} = 0$ to $400\text{ }\mu\text{A}$		3	20	mV
I_{CC}	Supply Current	$V_{CONT} = 2.4\text{ V}$		160	220	μA
I_{OUT}	Output Current	$\Delta V_{OUT} \leq 20\text{ mV}$			400	μA
$I_{CC(STBY)}$	Standby Supply Current	$V_{CONT} \leq 0.6\text{ V}$			1	μA

CONTROL TERMINAL SPECIFICATIONS

$V_{CONT(ON)}$	Control Voltage (ON)	$V_{OUT} = 965$ to 1025 mV , Output ON	1.8	2.4	V_{CC}	V
$V_{CONT(OFF)}$	Control Voltage (OFF)	$V_{OUT} \leq 0.1\text{ V}$, Output OFF	GND		0.6	V
I_{CONT}	Control Current			4.5	7.5	μA

Note 1: Power dissipation is 200 mW when mounted as recommended. Derate at 1.6 mW/ $^\circ\text{C}$ for operation above 25 $^\circ\text{C}$.


TEST CIRCUIT

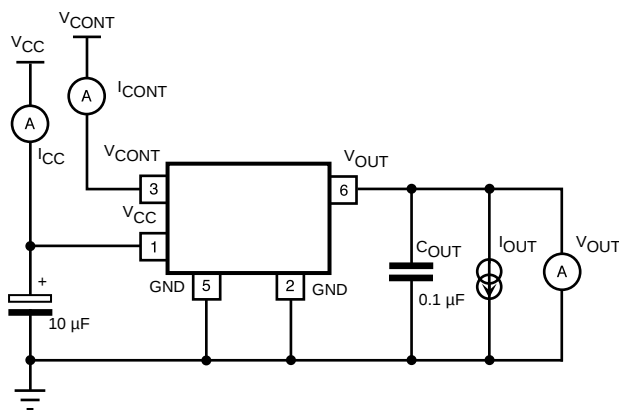


TYPICAL PERFORMANCE CHARACTERISTICS

$V_{CC} = 3\text{ V}$, $V_{CONT} = 2.4\text{ V}$, $I_{OUT} = 0\text{ }\mu\text{A}$, $T_A = 25\text{ }^\circ\text{C}$, unless otherwise specified.


OUTPUT VOLTAGE vs. TEMPERATURE

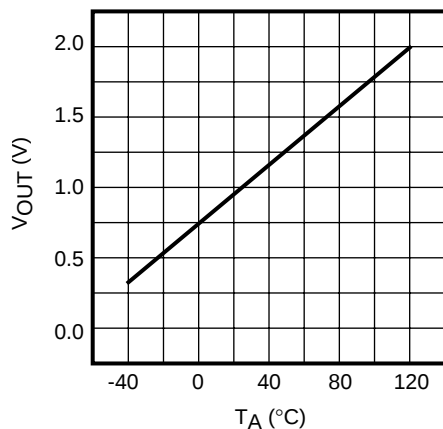


LINEARITY ERROR vs. TEMPERATURE

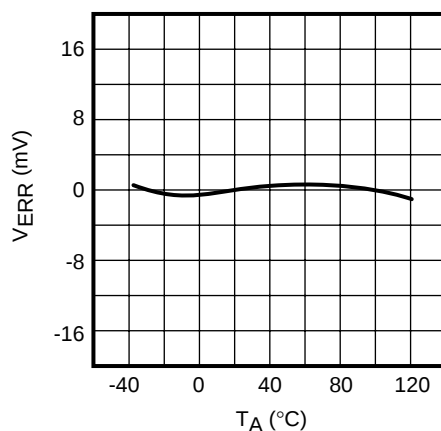


INPUT CURRENT vs. TEMPERATURE

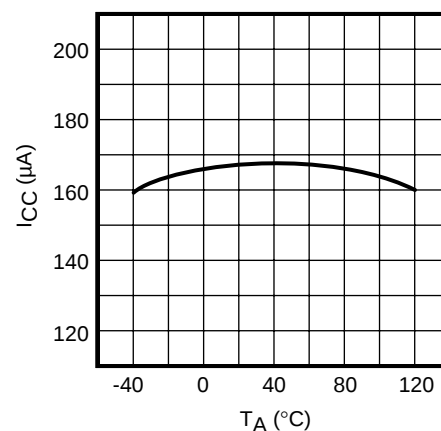


INPUT CURRENT vs. INPUT VOLTAGE

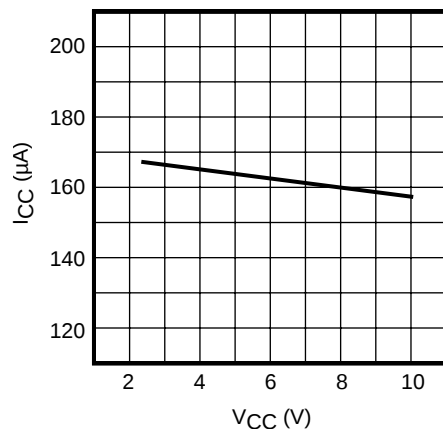

LINE REGULATION

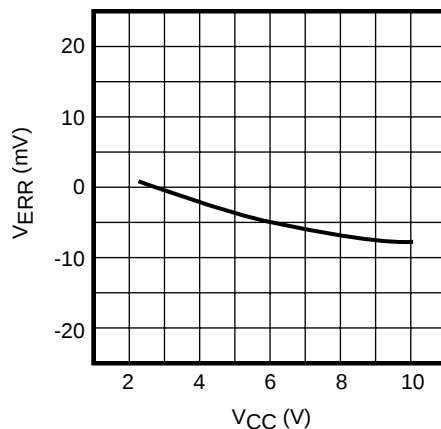


LOAD REGULATION

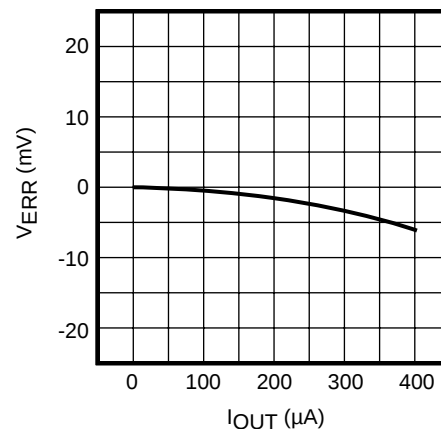


TYPICAL PERFORMANCE CHARACTERISTICS (CONT.)

$V_{CC} = 3\text{ V}$, $V_{CONT} = 2.4\text{ V}$, $I_{OUT} = 0\text{ }\mu\text{A}$, $T_A = 25\text{ }^\circ\text{C}$, unless otherwise specified.


OUTPUT VOLTAGE vs.
CONTROL VOLTAGE

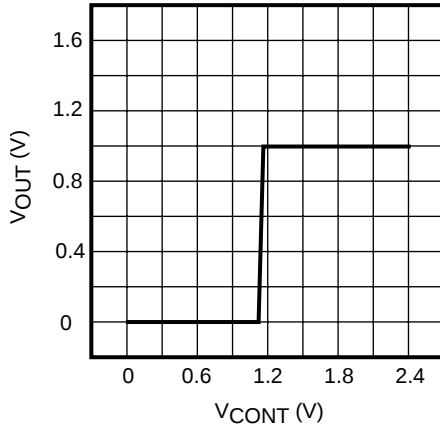


INPUT CURRENT vs.
CONTROL VOLTAGE

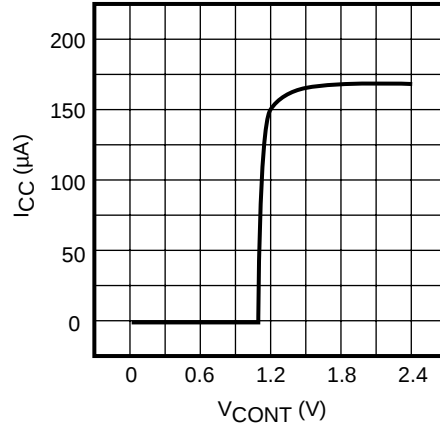


CONTROL CURRENT vs.
TEMPERATURE

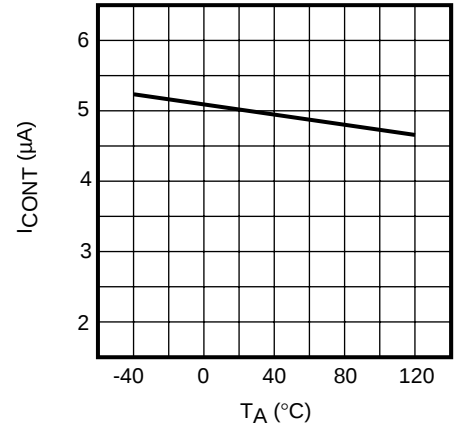


CONTROL CURRENT vs.
CONTROL VOLTAGE

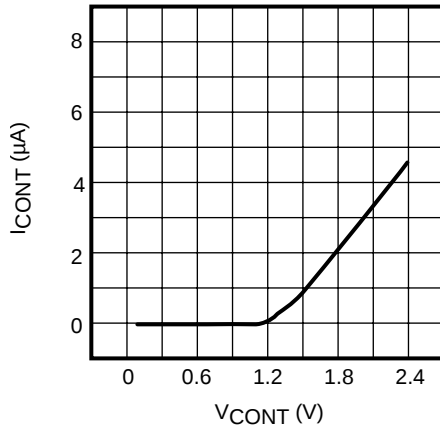


CONTROL VOLTAGE RESPONSE A

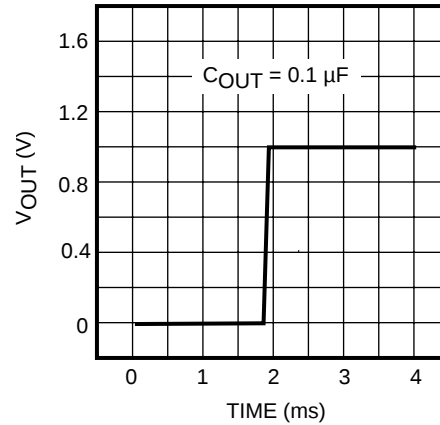


CONTROL VOLTAGE RESPONSE B

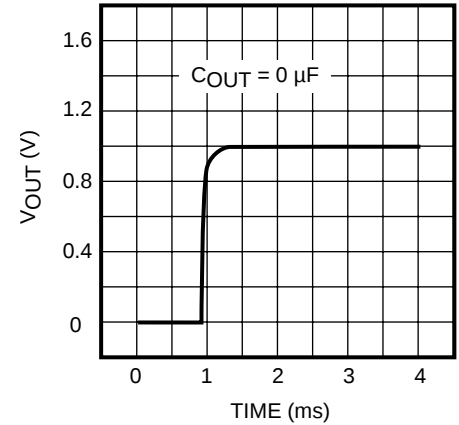


RIPPLE REJECTION RATIO A

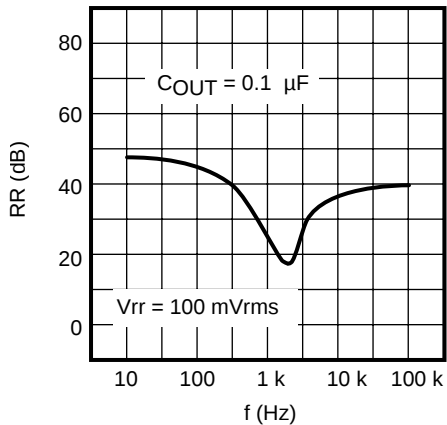

RIPPLE REJECTION RATIO B

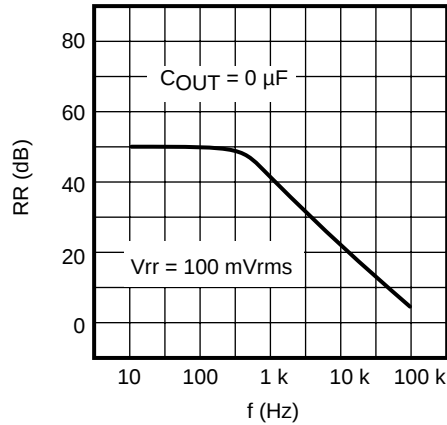


TEMPERATURE RESPONSE A

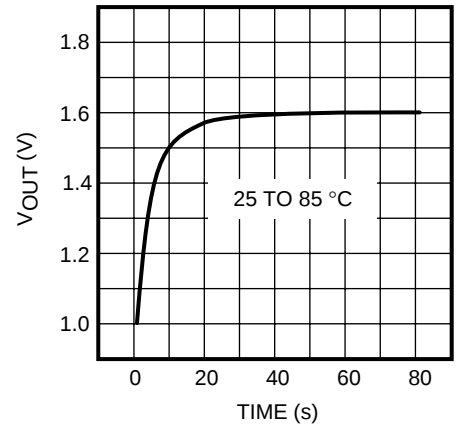




TYPICAL PERFORMANCE CHARACTERISTICS (CONT.)

$V_{CC} = 3\text{ V}$, $V_{CONT} = 2.4\text{ V}$, $I_{OUT} = 0\text{ }\mu\text{A}$, $T_A = 25\text{ }^\circ\text{C}$, unless otherwise specified.

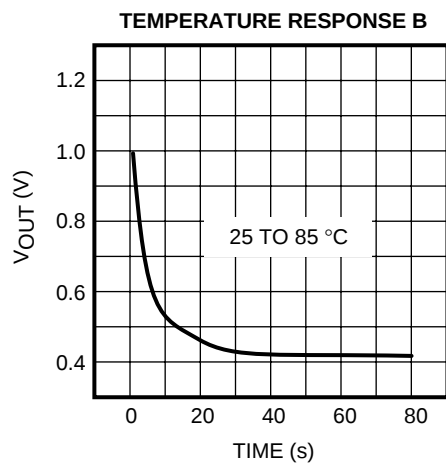


PACKAGE OUTLINE

SOT-23L (SOT-23L-6)

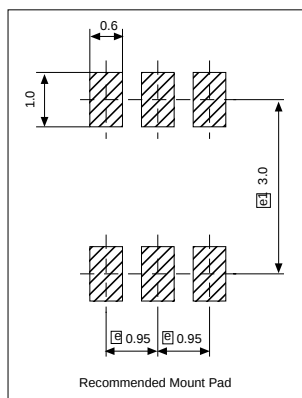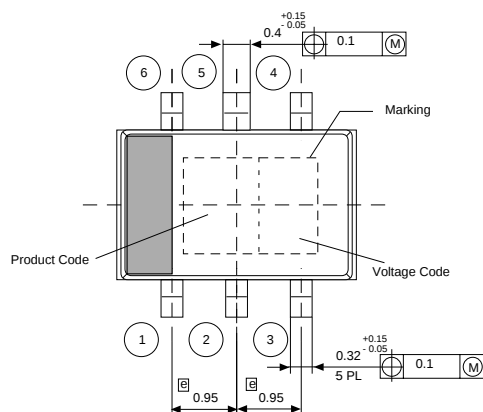

Dimensions are shown in millimeters
Tolerance: x.x = ± 0.2 mm (unless otherwise specified)

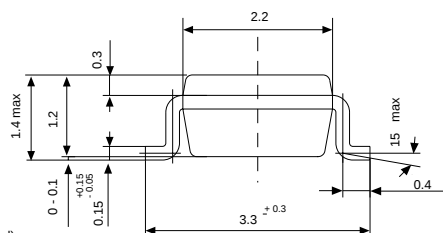

Marking Information

TK11034

Marking
34C

Toko America, Inc. Headquarters
1250 Feehanville Drive, Mount Prospect, Illinois 60056
Tel: (847) 297-0070 Fax: (847) 699-7864

TOKO AMERICA REGIONAL OFFICES

Midwest Regional Office
Toko America, Inc.
1250 Feehanville Drive
Mount Prospect, IL 60056
Tel: (847) 297-0070
Fax: (847) 699-7864

Western Regional Office
Toko America, Inc.
2480 North First Street, Suite 260
San Jose, CA 95131
Tel: (408) 432-8281
Fax: (408) 943-9790

Eastern Regional Office
Toko America, Inc.
107 Mill Plain Road
Danbury, CT 06811
Tel: (203) 748-6871
Fax: (203) 797-1223

Semiconductor Technical Support
Toko Design Center
4755 Forge Road
Colorado Springs, CO 80907
Tel: (719) 528-2200
Fax: (719) 528-2375

Visit our Internet site at <http://www.tokoam.com>