

查询TLRE16TP供应商

RED

捷多邦, 专业PCB打样工厂, 24小时加

TOSHIBA T-1¾ InGaAlP Ultra Bright LED


TLRE16TP

Product Features -

- InGaAlP Technology
- T-1¾ (5 mm) Package
- Water Clear Lens

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Forward Current	I _F	50	mA
Reverse Voltage	V _R	4	V
Power Dissipation	P _D	120	mW
Operating Temperature	T _{opr}	-40 ~ 100	°C
Storage Temperature	T _{stg}	-40 ~ 120	°C

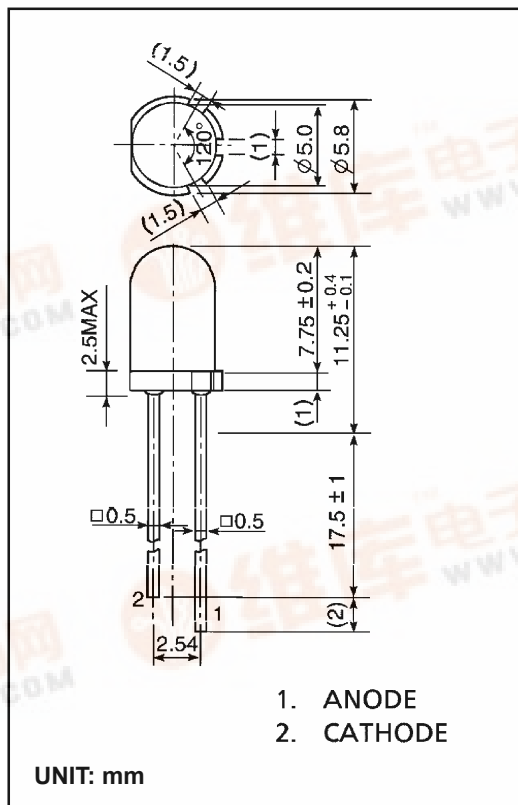

OPTO-ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Forward Voltage	V _F	IF = 20mA	—	1.9	2.4	V
Reverse Current	I _R	VR = 4V	—	—	50	μA
Luminous Intensity	I _v	IF = 20mA	272	800	—	mcd
Viewing Angle	2θ½	—	—	24	—	°
Peak Wavelength	λ _p	IF = 20mA	—	644	—	nm
Dominant Wavelength	λ _d	IF = 20mA	—	630	—	nm
Spectral Line Half Width	Δλ	IF = 20mA	—	20	—	nm










120 Broadway • Menands, New York 12204

Toll Free: (800) 98-4LEDS • Fax: (518) 432-7454

TOSHIBA T-1¾ InGaAlP Ultra Bright LED

RED

TLRE16TP Graphs -

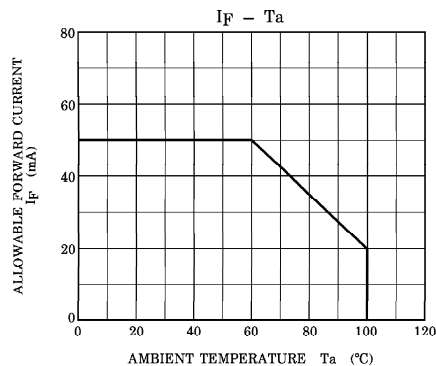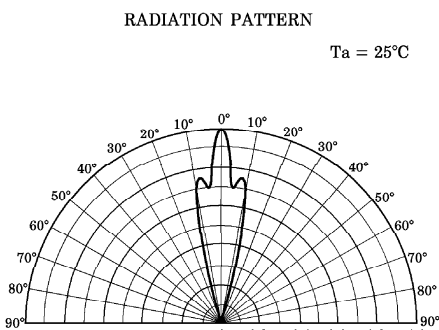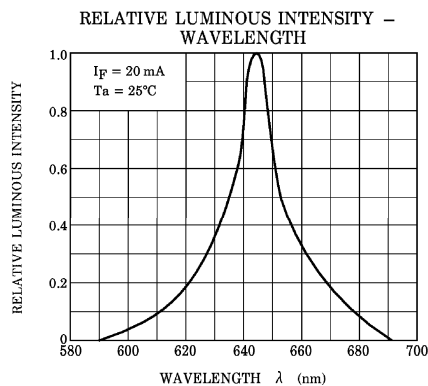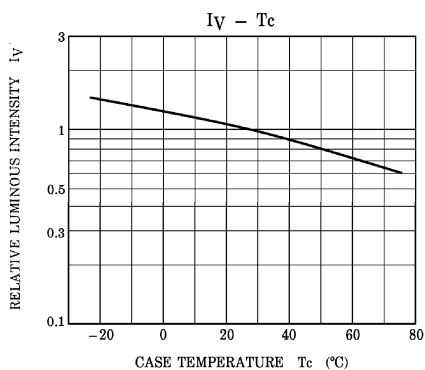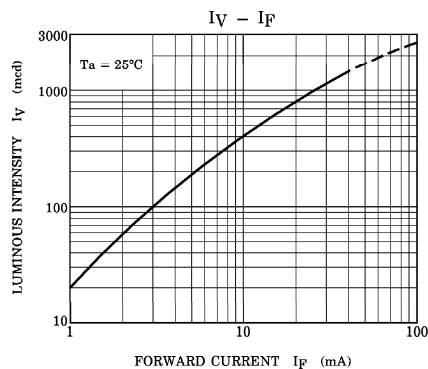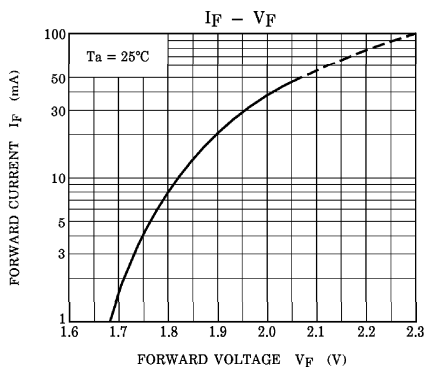

marktech
optoelectronics

120 Broadway • Menands, New York 12204
Toll Free: **(800) 98-4LED5** • Fax: (518) 432-7454