



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT PART NO.*	MAT'L SUFFIX	RECOMMENDED FASTENER	'A'	'B'	'C'	'D'	'E'	'F'	'G' 'REF'	'H' 'REF'	'I' 'REF'	USE WITH THESE CABLE TIE CROSS SECTIONS	WEIGHT (g) lbs/100 pcs.
TM3S8	NONE -0 -30 -69 -100	#8 (M4) SCREW							0.105 (2.7)	0.319	0.175	MINIATURE INTERMEDIATE STANDARD LT. HEAVY	0.369 (167.5)
TM3S10	NONE -0 -30 -69	#10 (M5) SCREW	0.875 (22.2)	0.620 (15.8)	0.375 (9.5)	0.320 (8.17)	0.088 (2.2)	0.210 (5.3)	0.115 (2.9)	0.380	0.193		0.363 (165.0)
TM3S25	NONE -0 -30	1/4" (M6) SCREW				±.020 (.5)	±.020 (.5)		0.155 (3.9)	0.500	0.260		0.296 (134.5)

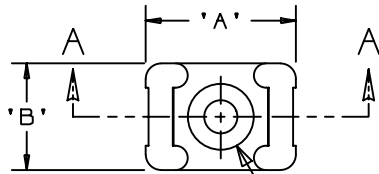

SEE NOTE 2



SECTION A - A



MAT'L SUFFIX	MATERIAL
NONE	NYLON 6/6
-0	WEATHER RESISTANT NYLON
-30	HEAT STABILIZED NYLON
-69	FLAME RETARDANT NYLON
-100	WEATHER RESISTANT POLYPROPYLENE

NOTES:

- *1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
- *2. HOLE DIMENSIONS SHOULD ACCOMMODATE SPECIFIED RECOMMENDED FASTENER.

DIMENSIONS IN BRACKETS ARE METRIC [mm]

CAD FILENAME/LAYERS

G00239EN_PB_TM3S_A_06

PANDUIT

CORP.

TINLEY PARK, ILLINOIS

TM3S - TIE MOUNT

6	9/11/02	LGG		REMOVED 120 FROM MAT'L SUFFIX TABLE	GB0239EN	6			
5	8/16/02	LGG		CHG DIM 'D' FROM .320 (8.1) TO .320 (8.17) ±.020 (.5). ADDED ±.020 (.5) TO DIM 'E' DELETED 120 MATERIAL FROM TABLE.	GB0239EN	5			
4	6/17/02	LGG		CHG DIM 'E' FROM 0.080 (2.0) TO 0.088 (2.2)	GB0239EN	4			
3	1/14/02	LGG		MADE TABLE 'G' REF, ADDED 'H' & 'I' TO TABLE	GB0239EN	3			
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ±0.05 (1.3) (.XXX) ±0.010 (0.25)
(.XX) ±0.02 (0.5) ANGLES ± 5°

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY

AJV

MAT'L:

DATE

12-17-96

SEE TABLE

CHK'D

SCALE

NONE

DRAWING NO.

GB0239EN

DWG

A
SIZE